

## Lecture 11 Frequency Response of FIR 19-Feb-99

## Info: Web-CT, Lab, HW

### Calendar:

Quiz #1 on 1-Mar (Monday)

Prob Set #5 due **TODAY**

Next Lab will be concentrate on  
Frequency Response

## READING ASSIGNMENTS

### This Lecture:

Chapter 6, pp. 157–165, 169–176

### Other Reading:

Recitation: Ch. 6, pp. 176–188

FREQUENCY RESPONSE EXAMPLES

Next Lecture: Chapter 6, pp. 188–194

## LECTURE OBJECTIVES

### SINUSOIDAL INPUT SIGNAL

DETERMINE FIR OUTPUT

### FREQUENCY RESPONSE of FIR


MAGNITUDE vs. Frequency

PHASE vs. Freq

PLOTTING:

$$H(\hat{\omega}) = |H(\hat{\omega})| e^{j\phi(\hat{\omega})}$$

# DIGITAL "FILTERING"

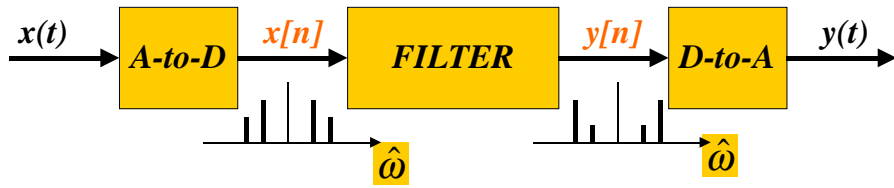

■ CONCENTRATE on the **SPECTRUM**

■ **SINUSOIDAL INPUT**

■ INPUT  $x[n]$  = **SUM of SINUSOIDS**

■ Then, OUTPUT  $y[n]$  = **SUM of SINUSOIDS**

# GENERAL FIR FILTER

■ **FILTER COEFFICIENTS  $\{b_k\}$**

■ **DEFINE THE FILTER**

$$y[n] = \sum_{k=0}^M b_k x[n - k]$$


■ For example,  $\{b_k\} = \{3, -1, 2, 1\}$

$$y[n] = \sum_{k=0}^3 b_k x[n - k]$$

$$= 3x[n] - x[n - 1] + 2x[n - 2] + x[n - 3]$$


# ANIMATION of FIR FILTER

Input Signal:  $x[n] = (1.02)^n + \cos(2\pi n/8 + \pi/4)$  for  $0 \leq n \leq 40$

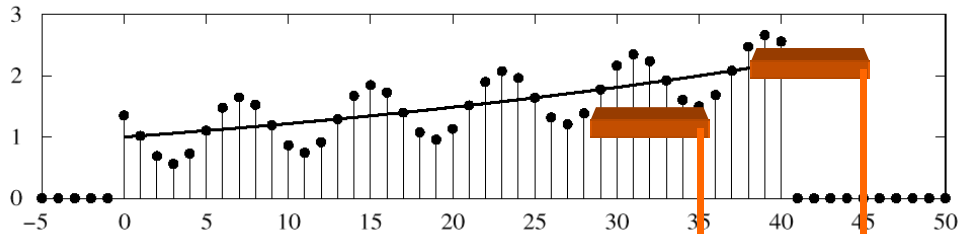


CAUSAL: Use Previous

Output of 7-Point Running-Average Filter

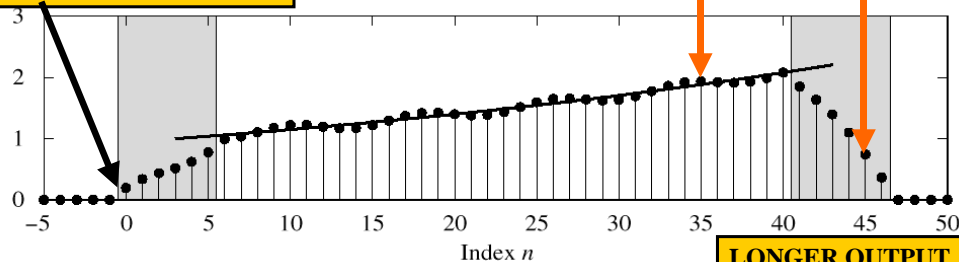

LONGER OUTPUT

# CONVDEMO: MATLAB GUI

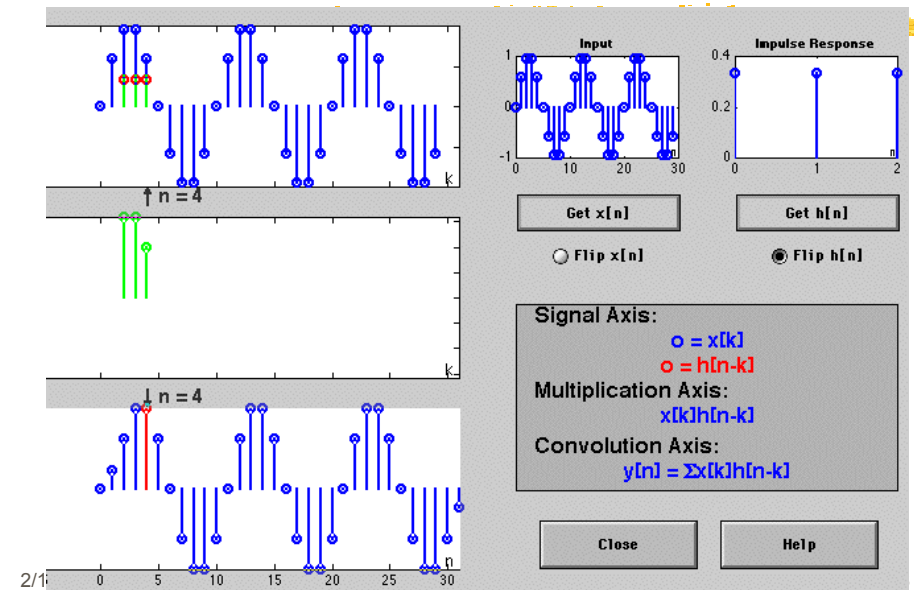

## SPECIAL INPUT SIGNALS

- INPUT:  $x[n] = \text{SINUSOID}$
- OUTPUT:  $y[n]$  will also be a **SINUSOID**
  - Different Amplitude and Phase
  - **SAME** Frequency
- **AMPLITUDE & PHASE CHANGE**
  - Called the **FREQUENCY RESPONSE**

2/17/99

EE-2200 Winter-99 jMc

9

## COMPLEX EXPONENTIAL

$$x[n] = Ae^{j\phi} e^{j\hat{\omega}n} \quad -\infty < n < \infty$$

$x[n]$  is the input signal—a complex exponential

$$y[n] = \sum_{k=0}^M b_k x[n-k] = \sum_{k=0}^M h[k] x[n-k]$$

FIR DIFFERENCE EQUATION

2/17/99

EE-2200 Winter-99 jMc

10

## COMPLEX EXP OUTPUT

- Use the FIR “Difference Equation”

$$y[n] = \sum_{k=0}^M b_k Ae^{j\phi} e^{j\hat{\omega}(n-k)}$$

DERIVATION

$$= \left( \sum_{k=0}^M b_k e^{-j\hat{\omega}k} \right) Ae^{j\phi} e^{j\hat{\omega}n}$$

$$= \mathcal{H}(\hat{\omega}) Ae^{j\phi} e^{j\hat{\omega}n} \quad -\infty < n < \infty$$

2/17/99

EE-2200 Winter-99 jMc

11

## FREQUENCY REPNSE

- At each frequency, we can define

$$\mathcal{H}(\hat{\omega}) = \sum_{k=0}^M b_k e^{-j\hat{\omega}k} \leftarrow \text{FREQUENCY RESPONSE}$$

- **Complex-valued formula**
  - Has **MAGNITUDE** vs. frequency
  - And **PHASE** vs. frequency

2/17/99

EE-2200 Winter-99 jMc

12

## EXAMPLE 6.1

### Example 6.1

$$\{b_k\} = \{1, 2, 1\}$$

$$\mathcal{H}(\hat{\omega}) = 1 + 2e^{-j\hat{\omega}} + e^{-j\hat{\omega}2}$$

To obtain formulas for the magnitude and phase of the frequency response

$$\mathcal{H}(\hat{\omega}) = 1 + 2e^{-j\hat{\omega}} + e^{-j\hat{\omega}2}$$

$$= e^{-j\hat{\omega}} (e^{j\hat{\omega}} + 2 + e^{-j\hat{\omega}})$$

$$= e^{-j\hat{\omega}} (2 + 2 \cos \hat{\omega})$$


**EXPLOIT SYMMETRY**

Since  $(2 + 2 \cos \hat{\omega}) \geq 0$  for frequencies  $-\pi < \hat{\omega} \leq \pi$ ,

the magnitude is  $|\mathcal{H}(\hat{\omega})| = (2 + 2 \cos \hat{\omega})$


and the phase is  $\angle \mathcal{H}(\hat{\omega}) = -\hat{\omega}$ .

Magnitude of Frequency Response of FIR Filter with Coefficients [1, 2, 1]

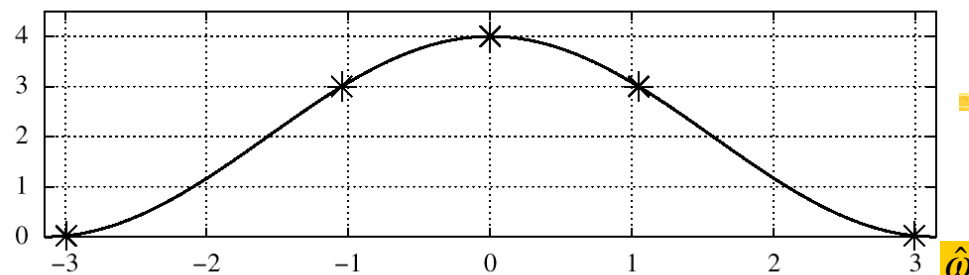

$$|\mathcal{H}(\hat{\omega})| = (2 + 2 \cos \hat{\omega})e^{-j\hat{\omega}}$$

Phase Angle of Frequency Response of FIR Filter with Coefficients [1, 2, 1]

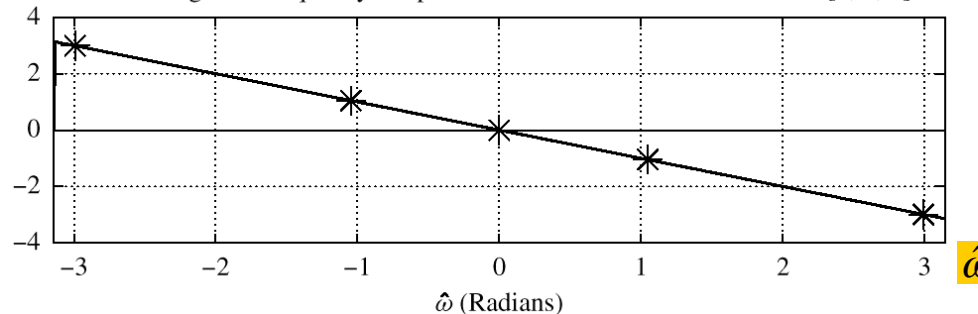

## MATLAB: FREQUENCY RESPONSE

■ **HH = freqz(bb, 1, ww)**

■ VECTOR **bb** contains Filter Coefficients

■ DSP-First: **HH = freekz(bb, 1, ww)**

■ FILTER COEFFICIENTS **{b<sub>k</sub>}**

$$\mathcal{H}(\hat{\omega}) = \sum_{k=0}^M b_k e^{-j\hat{\omega}k}$$

## EXAMPLE 6.2

■ Find  $y[n]$  when  $x[n] = \text{complex exp.}$


**Example 6.2** Consider the complex input  $x[n] = 2e^{j\pi/4}e^{j\pi n/3}$ .

$$|\mathcal{H}(\pi/3)| = 2 + 2 \cos(\pi/3) = 3 \text{ and } \angle \mathcal{H}(\hat{\omega}) = -\pi/3.$$

Therefore, the output of the system for the given input is

$$\begin{aligned} y[n] &= 3e^{-j\pi/3} \cdot 2e^{j\pi/4}e^{j\pi n/3} \\ &= (3 \cdot 2) \cdot e^{(j\pi/4 - j\pi/3)}e^{j\pi n/3} \\ &= 6e^{-j\pi/12}e^{j\pi n/3} = 6e^{j\pi/4}e^{j\pi(n-1)/3} \end{aligned}$$

# LTI Demo with Sinusoids

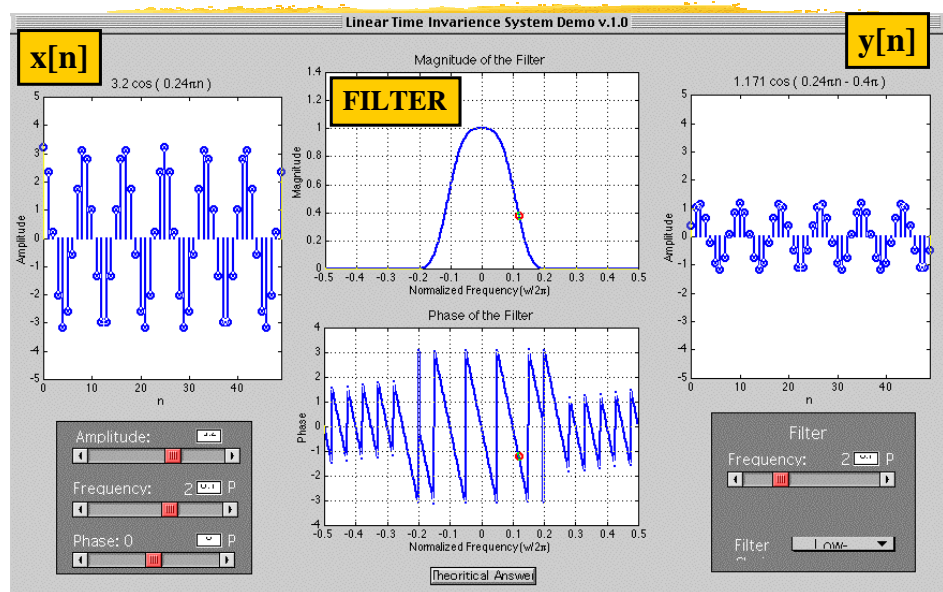

# LTI SYSTEMS

- LTI: Linear & Time-Invariant
- **COMPLETELY CHARACTERIZED** by:
  - FREQUENCY RESPONSE, or
  - IMPULSE RESPONSE  $h[n]$
- Two DOMAINS: time & frequency
  - Go back and forth quickly & easily

2/17/99

EE-2200 Winter-99 jMc

18

# Time & Frequency Relation

- Get Frequency Response from  $h[n]$ 
  - Here is the FIR case:

The frequency response of an LTI system

$$\mathcal{H}(\hat{\omega}) = \sum_{k=0}^M b_k e^{-j\hat{\omega}k} = \sum_{k=0}^M h[k] e^{-j\hat{\omega}k} \quad (6.1.4)$$

**IMPULSE RESPONSE**


2/17/99

EE-2200 Winter-99 jMc

19

# BLOCK DIAGRAMS

- Equivalent Representations

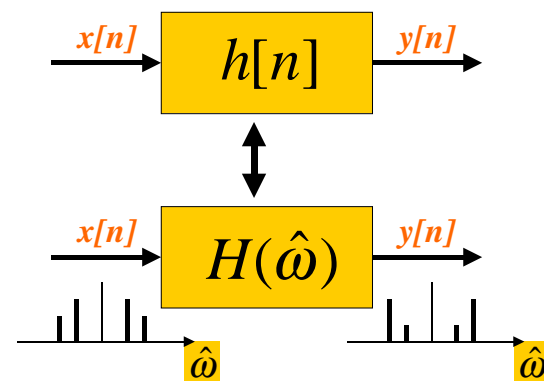


2/17/99

EE-2200 Winter-99 jMc

20

# DELAY SYSTEM

- UNIT DELAY: Find  $h[n]$  and  $H(\hat{\omega})$

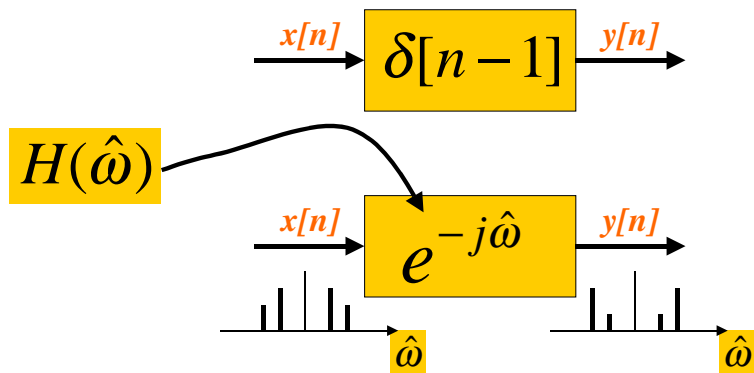

# CASCADE SYSTEMS

- Does the order of  $S_1$  &  $S_2$  matter?
  - NO, **LTI SYSTEMS can be rearranged !!!**
  - WHAT ARE THE FILTER COEFFS?  $\{b_k\}$
  - WHAT is the FREQUENCY RESPONSE ?

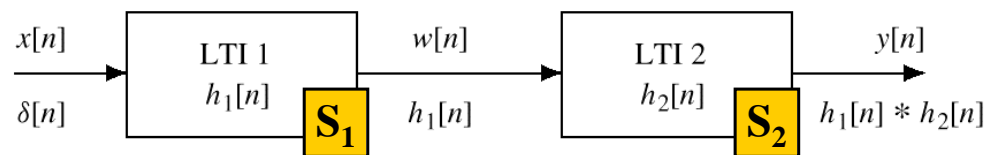


Figure 5.19 A Cascade of Two LTI Systems.

# CASCADE EQUIVALENT

- MULTIPLY** the Frequency Responses

