

Lecture 16

DIGITAL FILTERING of ANALOG SIGNALS


12-March-99

Info: Web-CT, Lab, HW

- Final Exam is Period 11
- Review Session planned (C-241)
 - Wednesday 6-7:30 PM
- Prob Set #7 is due Today
- All Labs due Today
- Reading: Ch. 8, except for 2nd-order

LECTURE OBJECTIVES

- THREE-DOMAIN APPROACH
 - EXHIBIT BANDPASS FILTERS
- RE-UNIFICATION:
 - How does Frequency Response affect $x(t)$ to produce $y(t)$?



THREE DOMAINS


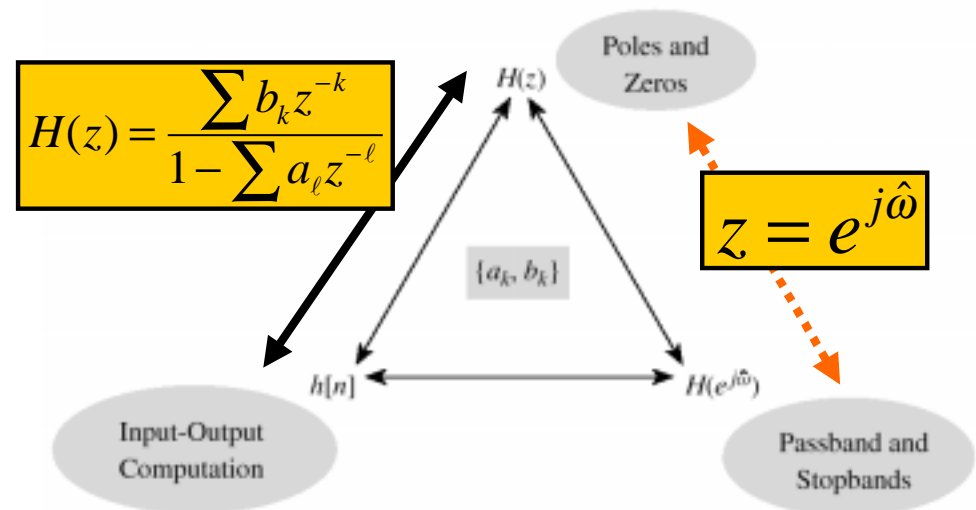


Figure 8.13 Relationship among the n -, z -, and $\hat{\omega}$ -domains. The filter coefficients $\{a_k, b_k\}$ play a central role.

3-D VIEW

EVALUTE H(z)
EVERYWHERE

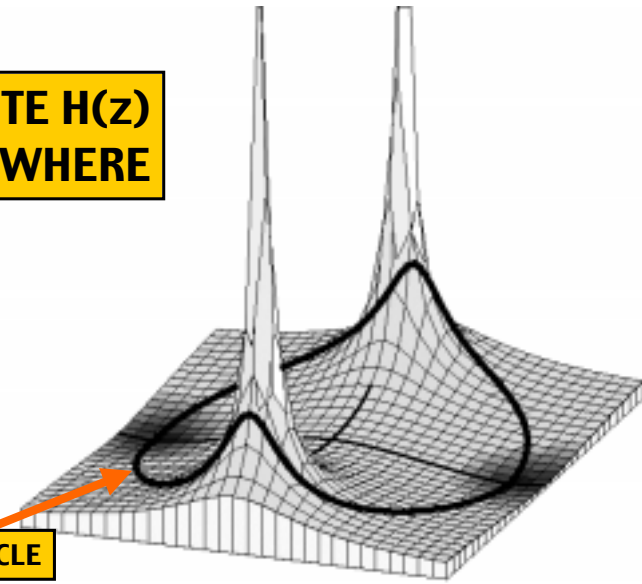


UNIT CIRCLE


The poles are at $z = 0.85e^{\pm j\pi/2}$ and the zeros at $z = \pm 1$.

3 DOMAINS MOVIE: IIR

H(z)

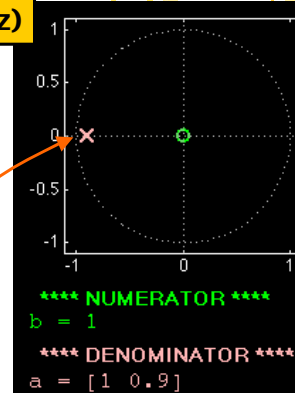


POLE MOVES

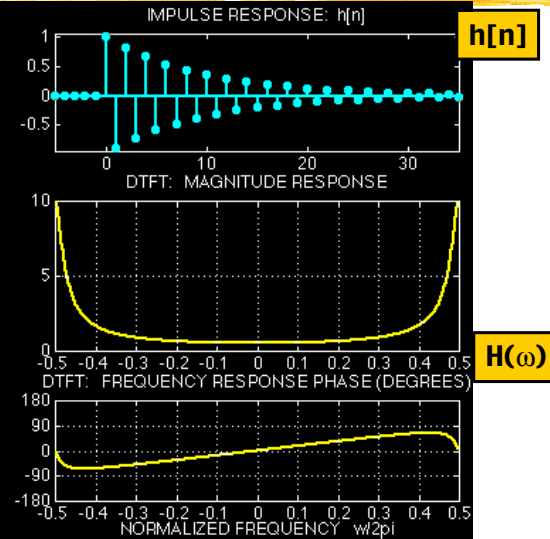


REALISTIC FIR BANDPASS


- FIR
- L = 24
- M=23
- 23 zeros

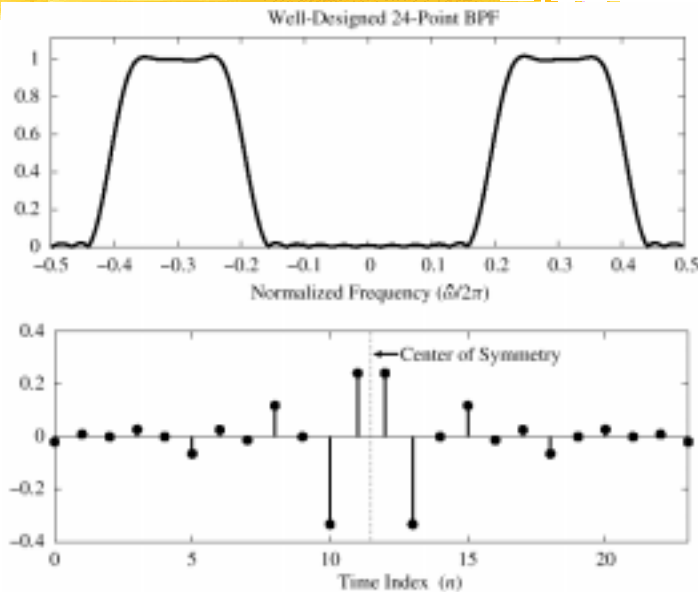


FIR BPF: 23 ZEROS

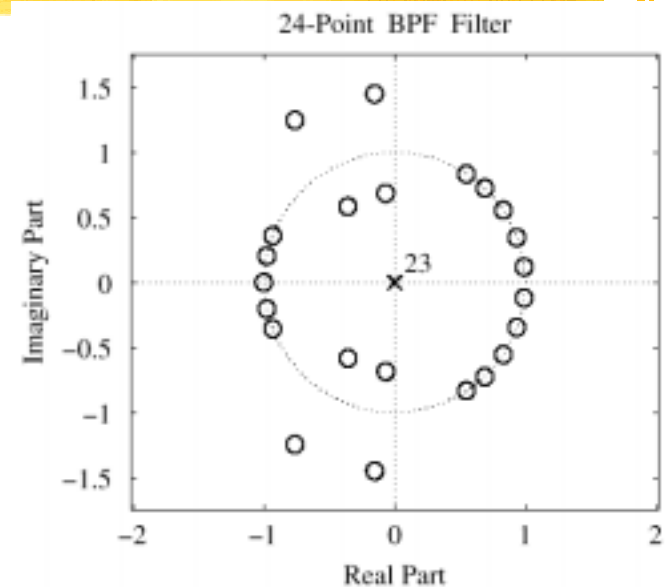

IIR Elliptic LPF (N=3)

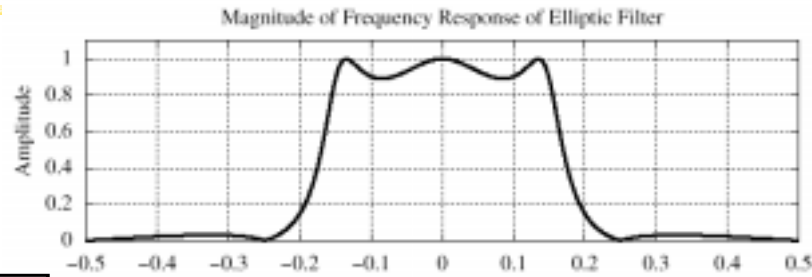


3 POLES

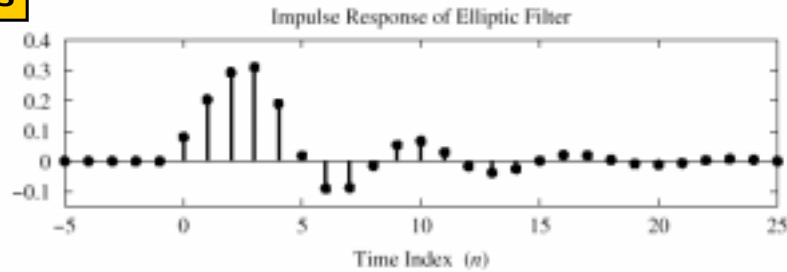

3/10/99

9

POLES & ZEROS of IIR

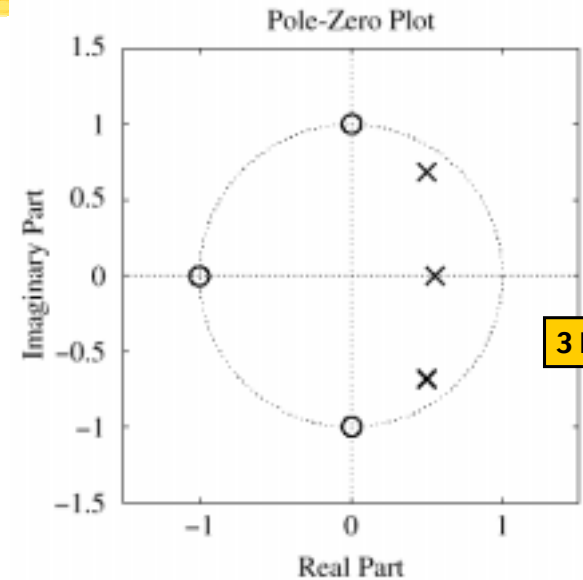


3 POLES

3/10/99

10

POP QUIZ

Given:

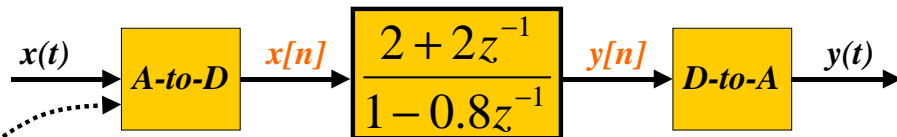

Find the output, $y(t)$

When $x(t) = \cos(2000\pi t)$

$f_s = 5000 \text{ Hz}$

3/10/99

EE-2200 Winter-99 jMc

11

POP QUIZ BECOMES

Given:

$$H(z) = \frac{2 + 2z^{-1}}{1 - 0.8z^{-1}}$$

Find the output, $y[n]$

When $x[n] = \cos(0.4\pi n)$

Because $\omega T_s = 2000\pi / 5000 = 0.4\pi$

NO Aliasing

3/10/99

EE-2200 Winter-99 jMc

12

SINUSOIDAL RESPONSE

- $x[n] = \text{SINUSOID} \Rightarrow y[n]$ is SINUSOID
- Get MAGNITUDE & PHASE from $H(z)$

if $x[n] = e^{j\hat{\omega}n}$, then

$$y[n] = \mathcal{H}(\hat{\omega})e^{j\hat{\omega}n}$$

$$\mathcal{H}(\hat{\omega}) = H(e^{j\hat{\omega}}) = H(z)|_{z=e^{j\hat{\omega}}}$$

POP QUIZ INSIDE ANSWER

- Given:

$$H(z) = \frac{2 + 2z^{-1}}{1 - 0.8z^{-1}}$$

- The input:

$$x[n] = \cos(0.4\pi n)$$


- Then $y[n]$

$$y[n] = M \cos(0.4\pi n + \psi)$$

$$H(e^{j0.4\pi}) = \frac{2 + 2e^{-j0.4\pi}}{1 - 0.8e^{-j0.4\pi}} = 3.02e^{-j0.452\pi}$$

POP QUIZ ANSWER

- Given:

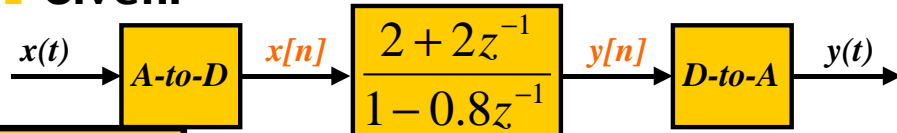

$$f_s = 5000 \text{ Hz}$$


- When $x(t) = \cos(2000\pi t)$

- The output is

$$y(t) = 3.02 \cos(2000\pi t - 0.452\pi)$$

ANOTHER POP QUIZ

- Given:

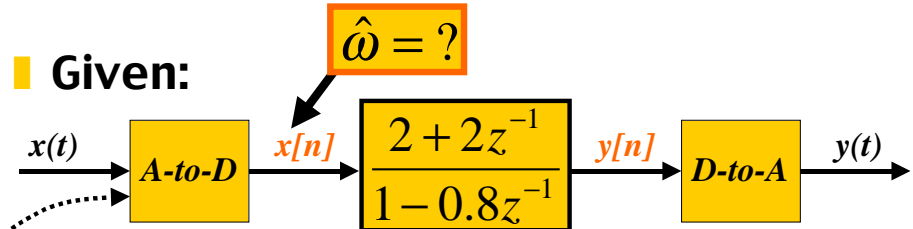

$$\hat{\omega} = ?$$

- Find the output, $y(t)$

- When


$$x(t) = \cos(2\pi(7500)t)$$

$$f_s = 5000 \text{ Hz}$$


$$\hat{\omega} = ?$$

2nd POP QUIZ ANSWER

Given:

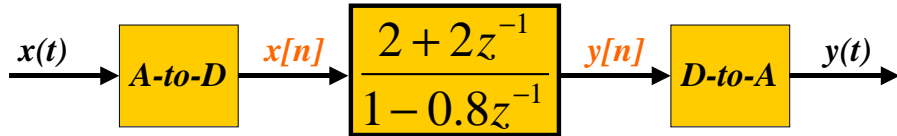


When $x(t) = \cos(2\pi(7500)t)$

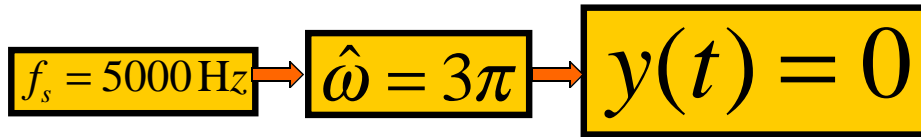

UNIT CIRCLE

MAPPING BETWEEN z and $\hat{\omega}$

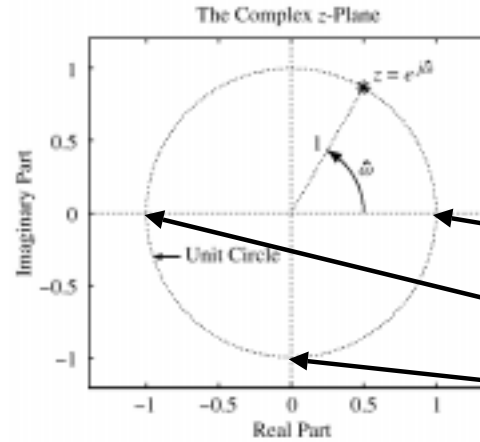

$$z = e^{j\hat{\omega}}$$

$z = 1$	\leftrightarrow	$\hat{\omega} = 0$
$z = -1$	\leftrightarrow	$\hat{\omega} = \pm\pi$
$z = \pm j$	\leftrightarrow	$\hat{\omega} = \pm\frac{1}{2}\pi$

IMPORTANT CONCEPTS

- ALL Signals have **Frequency Content**
 - Sum of Sinusoids
 - Complex Exponentials
- **FILTERS** alter the **Frequency Content**
 - Image Processing Example: Blur
 - Linear Time-Invariant Processing
- **3 Domains** for Analysis

THE FUTURE

Circuits & Laplace Transforms

