

EE-2025

Spring-2000

Lecture 17

**Frequency Response of
Continuous-Time Systems**

24-March-00

Info: Web-CT, Lab, HW

■ **Calendar:**

■ **Quiz #3 is 7-April**

■ **CHECK YOUR GRADES !!!**

■ **Web-CT is the OFFICIAL gradebook**

■ **Prob Set #9 is due next week**

■ **Lab #8 due next week**

■ **FORMAL Lab Report**

3/18/00

ECE-2025 Spring-00 rws/jMc

2

READING ASSIGNMENTS

■ **This Lecture:**

■ **Chapter 11, pp. 1100–1118 (all)**

■ **In NEW Chapters**

■ **Other Reading:**

■ **Next Lecture & Recitation:**

■ **Chapter 12, 1200–1230**

3/18/00

ECE-2025 Spring-00 rws/jMc

3

LECTURE OBJECTIVES

■ **Review of convolution**

■ **THE operation for LTI Systems**

■ **Complex exponential input signals**

■ **Frequency Response**

■ **Cosine signals**

■ **Fourier Series thru $H(j\omega)$**


■ **These are Analog Filters**

3/18/00

ECE-2025 Spring-00 rws/jMc

4

LTI Systems

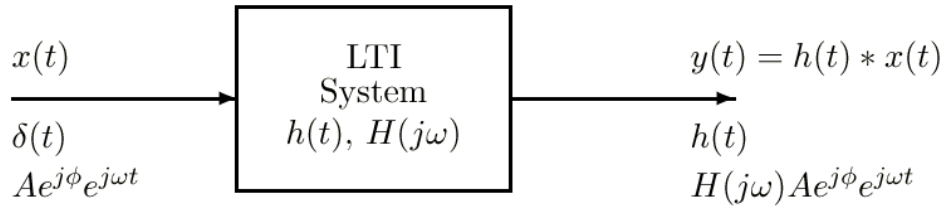

Convolution defines LTI system

$$y(t) = h(t) * x(t) = \int_{-\infty}^{\infty} h(\tau)x(t - \tau)d\tau$$

Response to complex exponential gives frequency response $H(j\omega)$

3/18/00

ECE-2025 Spring-00 rws/jMc

5

Thought Process #1

SUPERPOSITION

- | Make $x(t)$ a weighted sum of signals
- | Then $y(t)$ is also a sum—different weights
 - DIFFERENT OUTPUT SIGNALS usually

Use SINUSOIDS

- | Make $x(t)$ a weighted sum of sinusoids
- | Then $y(t)$ is also a sum of sinusoids
 - | Different Magnitudes and Phase

LTI SYSTEMS: Sinusoidal Response

3/18/00

ECE-2025 Spring-00 rws/jMc

6

Thought Process #2

SUPERPOSITION

- | Make $x(t)$ a weighted sum of signals

Use SINUSOIDS

- | Any $x(t)$ = weighted sum of sinusoids
- | HOW? Use FOURIER ANALYSIS INTEGRAL
 - | To find the weights from $x(t)$

LTI SYSTEMS:

- | Frequency Response changes each sinusoidal component

3/18/00

ECE-2025 Spring-00 rws/jMc

7

Complex Exponential Input

$$x(t) = Ae^{j\phi}e^{j\omega t} \mapsto y(t) = H(j\omega)Ae^{j\phi}e^{j\omega t}$$

$$y(t) = \int_{-\infty}^{\infty} h(\tau)Ae^{j\phi}e^{j\omega(t-\tau)}d\tau$$

$$y(t) = \left(\int_{-\infty}^{\infty} h(\tau)e^{-j\omega\tau}d\tau \right) Ae^{j\phi}e^{j\omega t}$$

$$H(j\omega) = \int_{-\infty}^{\infty} h(\tau)e^{-j\omega\tau}d\tau$$

Frequency Response

3/18/00

8

When does $H(j\omega)$ Exist?

- When is $|H(j\omega)| < \infty$?

$$|H(j\omega)| = \left| \int_{-\infty}^{\infty} h(\tau) e^{-j\omega\tau} d\tau \right| \leq \int_{-\infty}^{\infty} |h(\tau)| |e^{-j\omega\tau}| d\tau$$


$$|H(j\omega)| \leq \int_{-\infty}^{\infty} |h(\tau)| d\tau < \infty$$

- Thus the frequency response exists if the LTI system is a **stable** system.

$$h(t) = e^{-at} u(t) \Leftrightarrow H(j\omega) = \frac{1}{a + j\omega}$$

- Suppose that $h(t)$ is:

$$a = 1$$

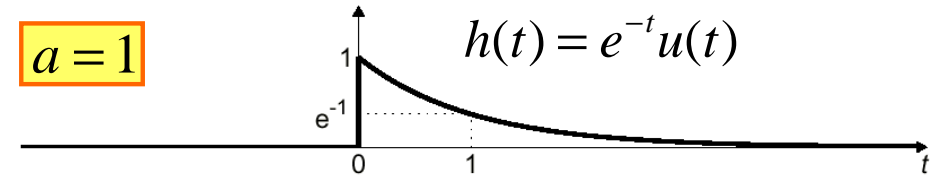


$$H(j\omega) = \int_{-\infty}^{\infty} e^{-a\tau} u(\tau) e^{-j\omega\tau} d\tau = \int_0^{\infty} e^{-(a+j\omega)\tau} d\tau$$

$$a > 0$$

$$H(j\omega) = \frac{e^{-(a+j\omega)\tau}}{-(a+j\omega)} \Big|_0^{\infty} = \frac{e^{-a\tau} e^{-j\omega\tau}}{-(a+j\omega)} \Big|_0^{\infty} = \frac{1}{a+j\omega}$$

Magnitude and Phase Plots

$$H(j\omega) = \frac{1}{1 + j\omega}$$

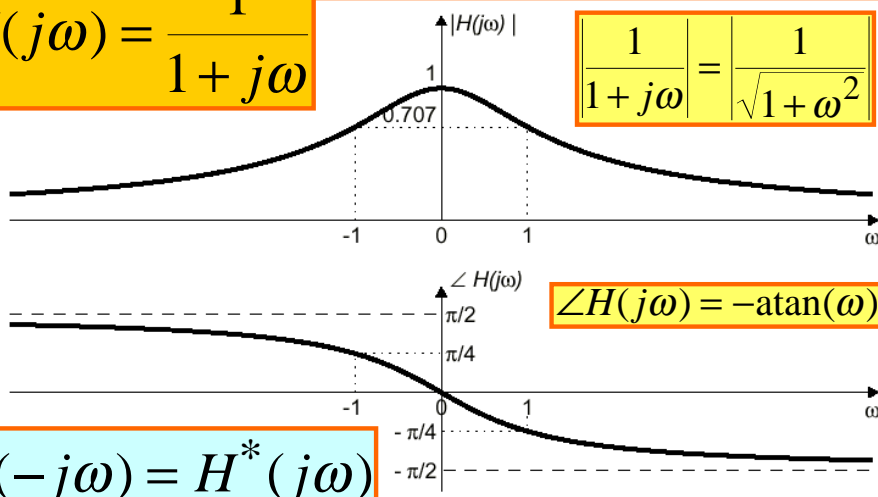

$$\frac{1}{1 + j\omega} = \frac{1}{\sqrt{1 + \omega^2}}$$

$$\angle H(j\omega) = -\text{atan}(\omega)$$

$$H(-j\omega) = H^*(j\omega)$$

Freq Response of Integrator?

- Impulse Response

- $h(t) = u(t)$

- NOT a Stable System

- Frequency response $H(j\omega)$ does NOT exist

- Leaky Integrator (a is small) $a \rightarrow 0$

- Cannot build a perfect Integral

$$h(t) = e^{-at} u(t) \Leftrightarrow H(j\omega) = \frac{1}{a + j\omega} \rightarrow \frac{1}{j\omega} ?$$

Ideal Delay:

$$y(t) = x(t - t_d)$$

$$H(j\omega) = \int_{-\infty}^{\infty} \delta(\tau - t_d) e^{-j\omega\tau} d\tau = e^{-j\omega t_d}$$

$$H(j\omega) = e^{-j\omega t_d}$$

$$x(t) = e^{j\omega t} \mapsto$$


$$H(j\omega)$$

$$y(t) = e^{j\omega(t-t_d)} = e^{-j\omega t_d} e^{j\omega t}$$

13

Ideal Lowpass Filter

$$H_{LP}(j\omega) = \begin{cases} e^{-j\omega t_d} & |\omega| < \omega_{co} \\ 0 & |\omega| > \omega_{co} \end{cases}$$

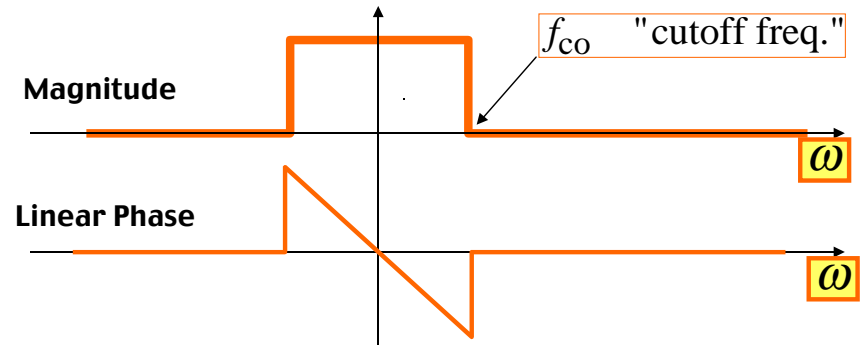

3/18/00

ECE-2025 Spring-00 rws/jMc

14

Example: Ideal Low Pass

$$H_{LP}(j\omega) = \begin{cases} e^{-j3\omega} & |\omega| < 2 \\ 0 & |\omega| > 2 \end{cases}$$

$$x(t) = 10e^{j\pi/3} e^{jt} \mapsto y(t) = H(j1)10e^{j\pi/3} e^{jt}$$

$$y(t) = e^{-j3} 10e^{j\pi/3} e^{jt} = 10e^{j\pi/3} e^{j(t-3)}$$

3/18/00

ECE-2025 Spring-00 rws/jMc

15

Cosine Input

$$x(t) = A \cos(\omega_0 t + \phi) = \frac{A}{2} e^{j\phi} e^{j\omega_0 t} + \frac{A}{2} e^{-j\phi} e^{-j\omega_0 t}$$

$$y(t) = H(j\omega_0) \frac{A}{2} e^{j\phi} e^{j\omega_0 t} + H(-j\omega_0) \frac{A}{2} e^{-j\phi} e^{-j\omega_0 t}$$

$$\text{Since } H(-j\omega_0) = H^*(j\omega_0)$$

$$y(t) = A |H(j\omega_0)| \cos(\omega_0 t + \phi + \angle H(j\omega_0))$$

3/18/00

ECE-2025 Spring-00 rws/jMc

16

STRATEGY

ANALYSIS

- Get representation from the signal
- Works for PERIODIC Signals

Fourier Series

- INTEGRAL over one period


$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j\omega_0 kt} dt$$

3/18/00


ECE-2025 Spring-00 rws/jMc

17

General Periodic Signals

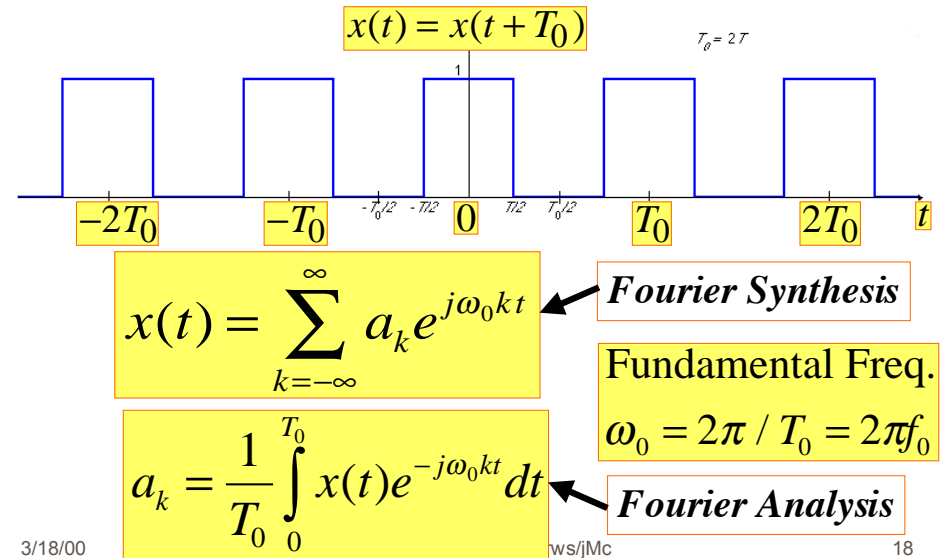

Square Wave Signal

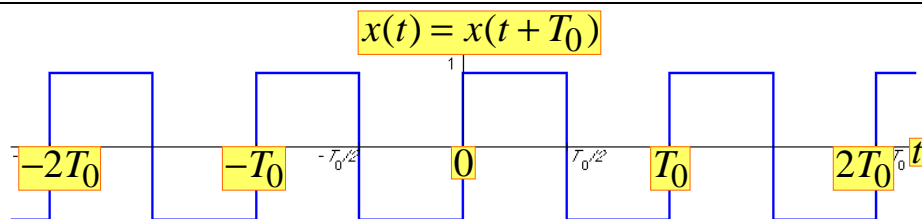

$$a_k = \frac{1}{T_0} \int_0^{T_0/2} (1) e^{-j\omega_0 kt} dt + \frac{1}{T_0} \int_{T_0/2}^{T_0} (-1) e^{-j\omega_0 kt} dt$$

$$a_k = \frac{e^{-j\omega_0 kT_0/2}}{-j\omega_0 kT_0} \Big|_0^{T_0/2} - \frac{e^{-j\omega_0 kT_0}}{-j\omega_0 kT_0} \Big|_{T_0/2}^{T_0} = \frac{1 - e^{-j\pi k}}{j\pi k}$$


3/18

19


Spectrum from Fourier Series

$$a_k = \frac{1 - e^{-j\pi k}}{j\pi k} = \begin{cases} \frac{2}{j\pi k} & k = \pm 1, \pm 3, \dots \\ 0 & k = 0, \pm 2, \pm 4, \dots \end{cases}$$

Magnitude Spectrum for Square Wave

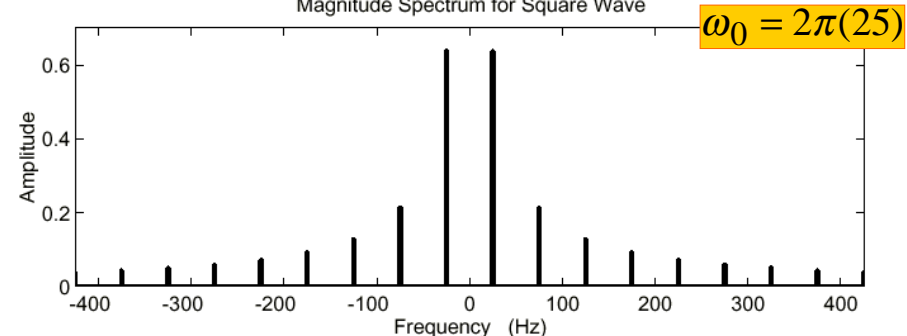

LTI Systems with Periodic Inputs

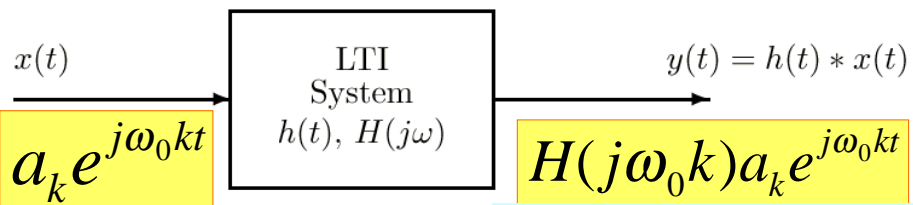

By superposition,

Output has same frequencies



$$y(t) = \sum_{k=-\infty}^{\infty} a_k H(j\omega_0 k) e^{j\omega_0 k t} = \sum_{k=-\infty}^{\infty} b_k e^{j\omega_0 k t}$$

$$b_k = a_k H(j\omega_0 k)$$

3/18/00

21


Ideal Lowpass Filter

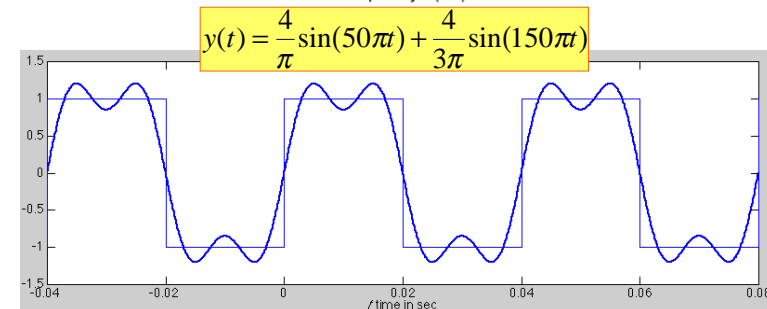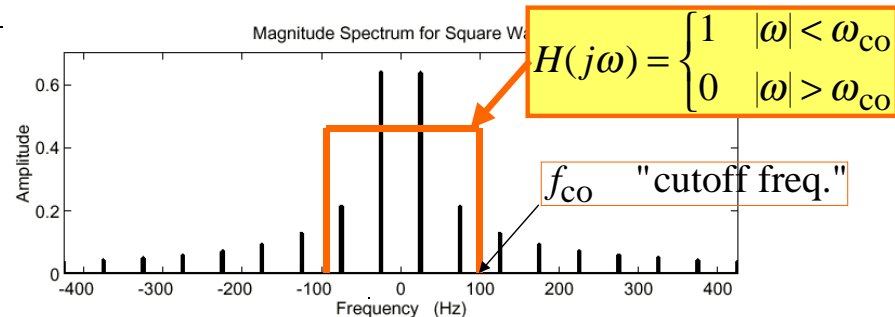


3/18/00

22

Ideal Lowpass Filter

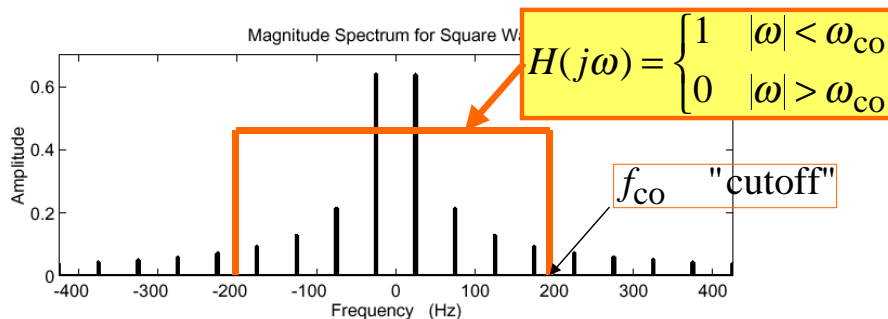


$$y(t) = \frac{4}{\pi} \sin(50\pi t) + \frac{4}{3\pi} \sin(150\pi t) + \frac{4}{5\pi} \sin(250\pi t) + \frac{4}{7\pi} \sin(350\pi t)$$

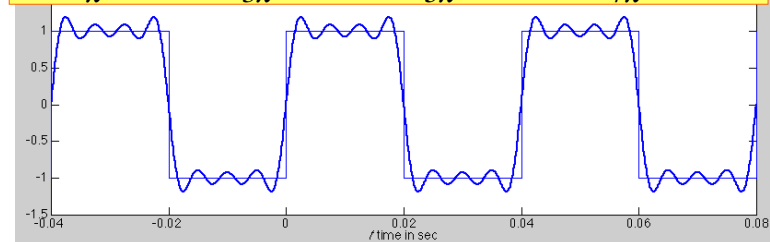

3/18/00

23

Ideal Bandpass Filter

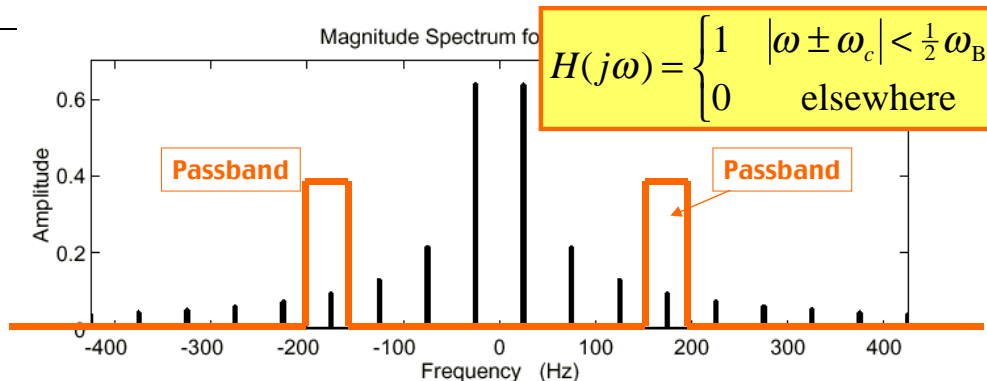

What is the output signal ?

$$y(t) = \frac{2}{j7\pi} e^{j2\pi(175)t} - \frac{2}{j7\pi} e^{-j2\pi(175)t} = \frac{4}{7\pi} \cos(2\pi(175)t - \frac{1}{2}\pi)$$

3/18/00

ECE-2025 Spring-00 rws/jMc

24