

ECE-2025

Spring-01

LECTURE #1

Sinusoids

5-Jan-01

INFORMATION

- LABS
 - Room 252 in VanLeer Building
 - Two weeks to do first lab
 - MATLAB based computer projects
 - MATLAB Help: next week in the evenings
- RECITATIONS
 - EMPHASIS on Problem Solving
 - Attend Recitation next week
- GRADING ?

REMINDERS

- Web-CT Login and Password:
 - gtxxxxx.prism.gatech.edu and last 4 digits of student number
- ECE Computer Account
 - All ECE Students have an account
 - Otherwise, check in room 309 of CoC Building
- On-Line HW in WebCT
 - Due NEXT Wednesday
 - It's a review

WebCT

WebCT

Hide Navigation, Expand Content

ECE2025 All Sections: Introduction to Signal Processing

Home

ECE-2025: Introduction to Signal Processing

2001

Room: W200 Van Leer (Auditorium)
Email: ron.schafer@ece.gatech.edu
Phone: (404) 894-6863 or (404) 894-2917

please refer to the course Information section.

00022 times.

Course Menu


- Homepage
- Calendar
- Information
- Lectures
- Assignments
- Grades
- Bulletin Board
- Resources

webct.gatech.edu

READING ASSIGNMENTS

- This Lecture:
 - Chapter 2, pp. 9-17
- Appendix A: Complex Numbers
- Appendix B: MATLAB
- Chapter 1: Introduction

CONVERGING FIELDS

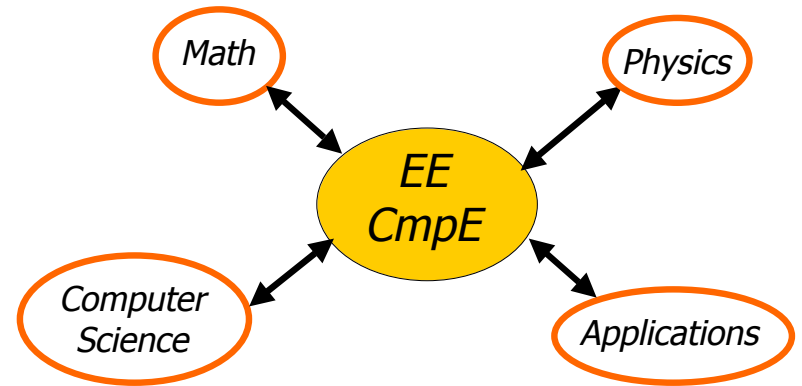

COURSE OBJECTIVE

- Students will be able to:
- Understand **mathematical** descriptions of signal processing **algorithms** and express those algorithms as computer **implementations** (MATLAB)
- What are your objectives?


WHY USE DSP ?

- Mathematical **abstractions** lead to generalization and discovery of new processing techniques
- Computer implementations are **flexible**



- Applications provide a **physical** context

Hot DSP Application

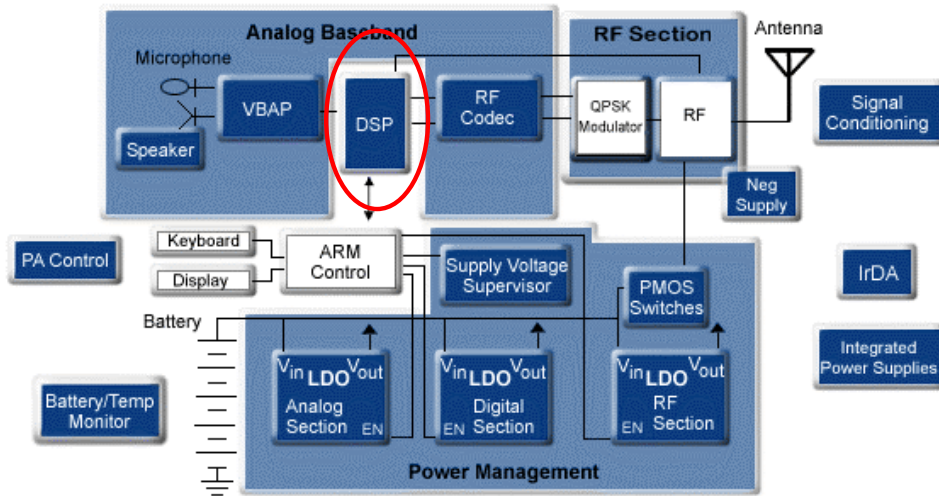

1/5/01

Cellular Phone

9

LECTURE OBJECTIVES

- Write general formula for a "sinusoidal" waveform, or signal
- From the formula, plot the sinusoid versus time
- What's a **signal**?
 - It's a **function** of time, $x(t)$
 - in the mathematical sense

1/5/01

ECE-2025 Spring-01 rws/jMc

10

TUNING FORK EXAMPLE


- CD-ROM demo
- "A" is at 440 Hertz (Hz)
- Waveform is a SINUSOIDAL SIGNAL
- Computer plot looks like a sine wave
- Here is a mathematical formula:

$$x(t) = A \cos(2\pi(440)t + \varphi)$$

1/5/01

ECE-2025 Spring-01 rws/jMc

11

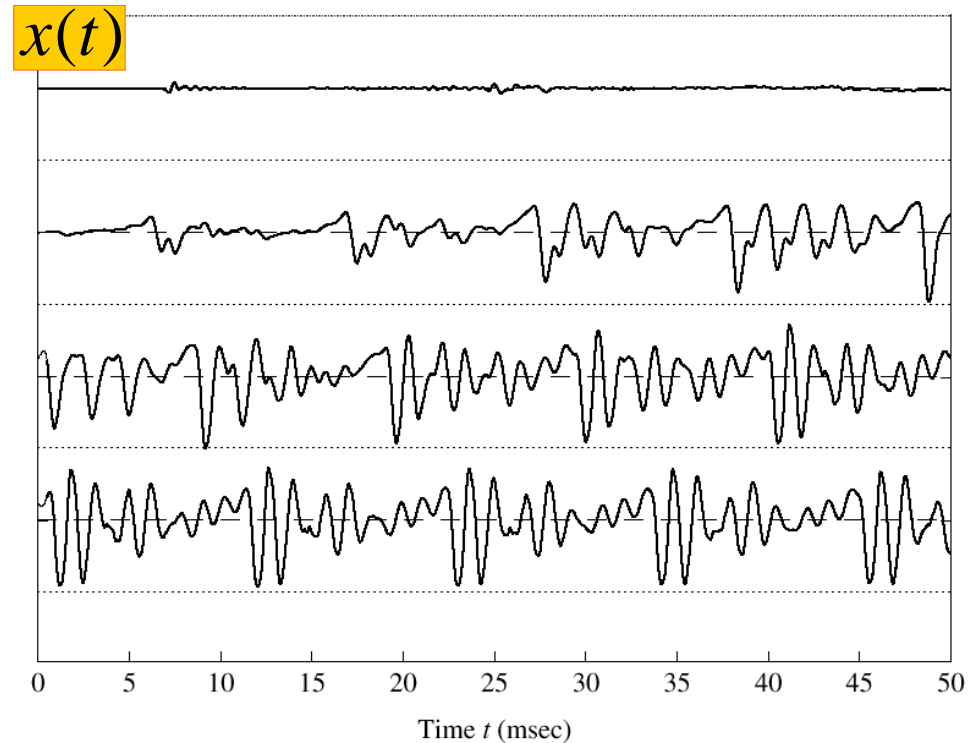

DIGITIZE the WAVEFORM

- $x[n]$ is a SAMPLED SINUSOID
 - A list of numbers stored in memory
- Sample at 11,025 samples per second
 - Called the SAMPLING RATE of the A/D
 - Time between samples is
 - $1/11025 = 90.7$ microsec
- Output via D/A hardware (at F_{samp})

STORING DIGITAL SOUND

- $x[n]$ is a SAMPLED SINUSOID
 - A list of numbers stored in memory
- CD rate is 44,100 samples per second
- 16-bit samples
- Stereo uses 2 channels
- Number of bytes for 1 minute is
 - $2 \times (16/8) \times 60 \times 44100 = 10.584$ Mbytes


TRIG FUNCTIONS

- Circular Functions

$\sin \theta$ and $\cos \theta$

- Common Values

- $\sin(k\pi) = 0$
- $\cos(0) = 1$
- $\cos(2k\pi) = 1$ and $\cos((2k+1)\pi) = -1$
- $\cos((k+0.5)\pi) = 0$

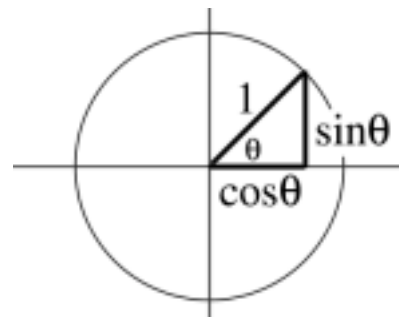


$\cos \theta = \cos(\theta + 2\pi)$


$\sin \theta = \sin(\theta + 2\pi)$

Sine and cosine as a function of angle

$\sin \theta$ versus θ $\sin \theta = \sin(\theta + 2\pi)$

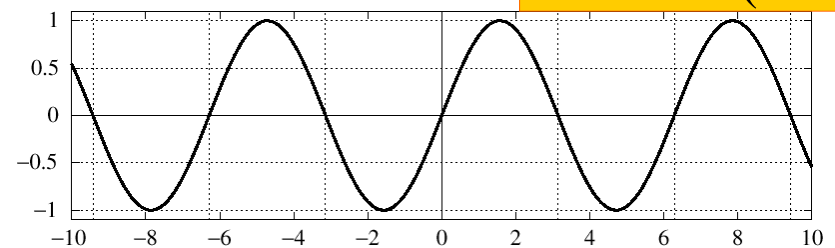

$\cos \theta$ versus θ $\cos \theta = \cos(\theta + 2\pi)$

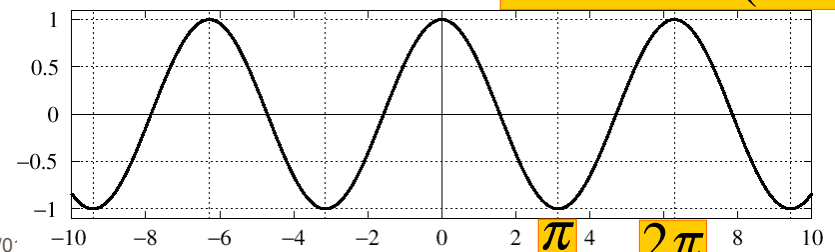

SINE and COSINE signals

- Make $\theta = \omega t + \varphi = \theta(t)$
- Always use the COSINE FORM

$$\cos(\omega t + \varphi)$$

- Sine is a special case:

$$\sin(\omega t) = \cos(\omega t - \pi/2)$$

1/5/01

ECE-2025 Spring-01 rws/jMc

17

SINUSOIDAL SIGNAL

$$x(t) = A \cos(\omega t + \varphi)$$

- FREQUENCY** ω
 - Radians/sec
 - Hertz (cycles/sec)
$$\omega = (2\pi)f$$
- AMPLITUDE** A
 - Magnitude
- PERIOD** (in sec)
$$T = \frac{1}{f} = \frac{2\pi}{\omega}$$
- PHASE** φ

1/5/01

ECE-2025 Spring-01 rws/jMc


18

EXAMPLE of SINUSOID

- Given the Formula

$$5 \cos(0.3\pi t + 1.2\pi)$$

- Make a plot

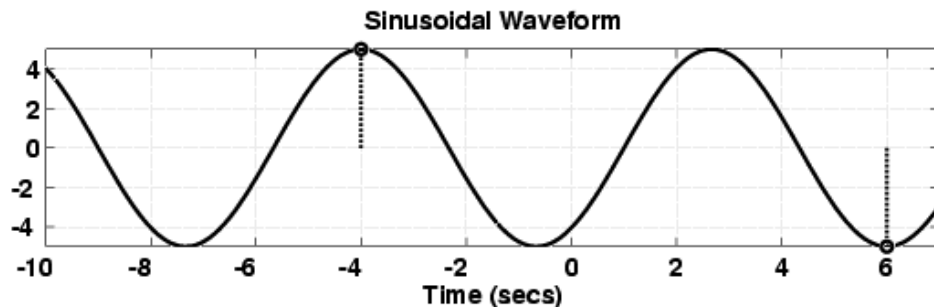

PLOT COSINE SIGNAL

$$5 \cos(0.3\pi t + 1.2\pi)$$

- Formula defines A , ω , and φ

$$\begin{aligned} A &= 5 \\ \omega &= 0.3\pi \\ \varphi &= 1.2\pi \end{aligned}$$

1/5/01

ECE-2025 Spring-01 rws/jMc

20

PLOTTING COSINE SIGNAL

from the FORMULA

$$5\cos(0.3\pi t + 1.2\pi)$$

- Determine **period**:

$$T = 2\pi / \omega = 2\pi / 0.3\pi = 20 / 3$$

- Determine a **peak** location by solving

$$(\omega t + \varphi) = 0$$

- **Zero** crossing is $T/4$ before or after
- Positive & Neg. peaks spaced by $T/2$