

**Lecture 21****Sampling and Reconstruction****9-April-01****Info: Web-CT, Lab, HW**

- Calendar:
  - Final Exam: 4-May, 2:50 pm - Period 15
  - One page hand-written notes, Calculator
  - Covers entire course.
- Prob Set #11 is due this week
- Prob Set #12 assigned, due next week
- Lab #12 assigned. Do verifications this week. Report due last week of classes.
- Lab #11 due next week
- Reading Assignment: Ch 13 of Notes.

**LECTURE OBJECTIVES**

- **Sampling Theorem** Revisited
  - GENERAL: in the **FREQUENCY DOMAIN**
  - Fourier transform of sampled signal
  - Reconstruction from samples
- Review of FT properties
  - Convolution <--> multiplication
  - Frequency shifting
  - Review of AM

**Table of FT Properties**

$$x(t) * h(t) \Leftrightarrow H(j\omega)X(j\omega)$$

**Delay Property**

$$x(t - t_d) \Leftrightarrow e^{-j\omega t_d} X(j\omega)$$


**Frequency Shifting**

$$x(t)e^{j\omega_0 t} \Leftrightarrow X(j(\omega - \omega_0))$$

**Scaling**

$$x(at) \Leftrightarrow \frac{1}{|a|} X(j(\frac{\omega}{a}))$$


# Amplitude Modulator

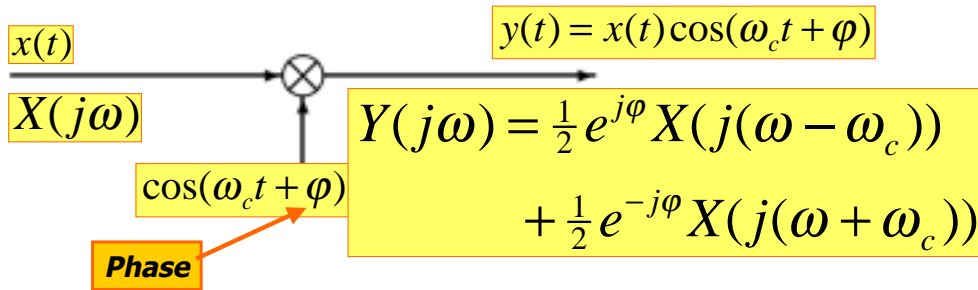

- $x(t)$  modulates the amplitude of the cosine wave. The result in the frequency-domain is two **SHIFTED** copies of  $X(j\omega)$ .


# Double Sideband AM (Time-Domain)

- In the time-domain, the envelope of sinewave peaks follows  $|x(t)|$

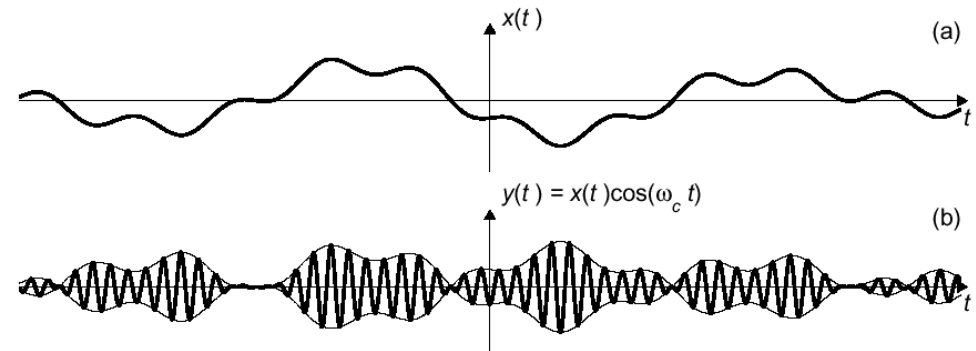


# DSBAM: Frequency-Domain

**"Typical" bandlimited input signal**

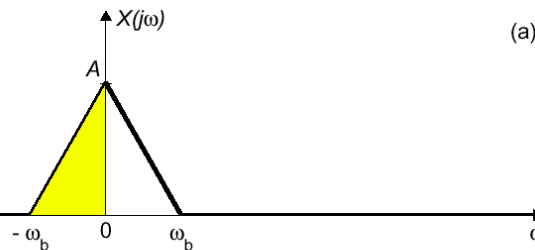


**Frequency-shifted copies**

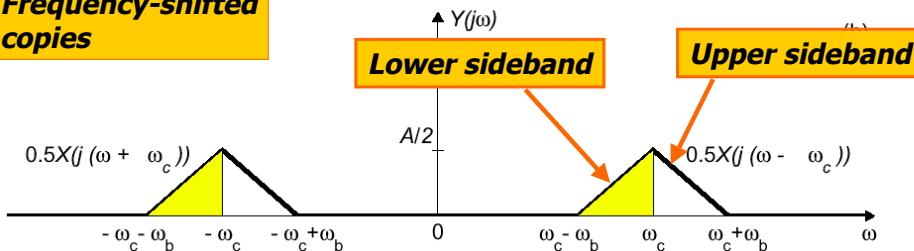


# Ideal C-to-D Converter

- Mathematical Model for A-to-D**

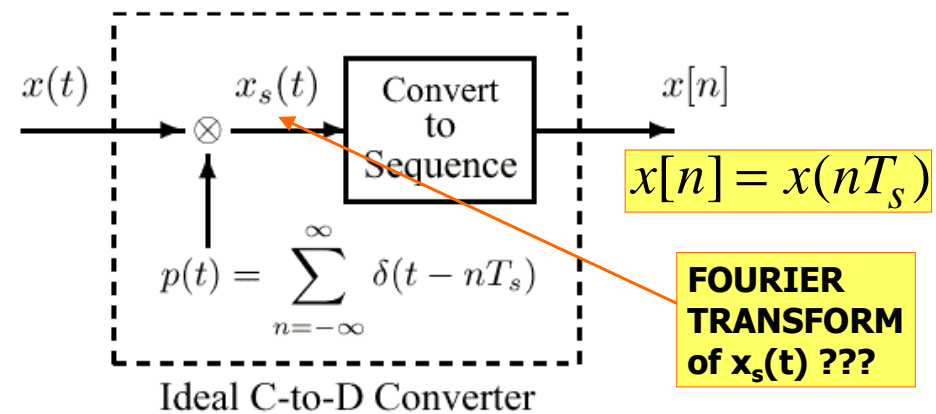


# Periodic Impulse Train

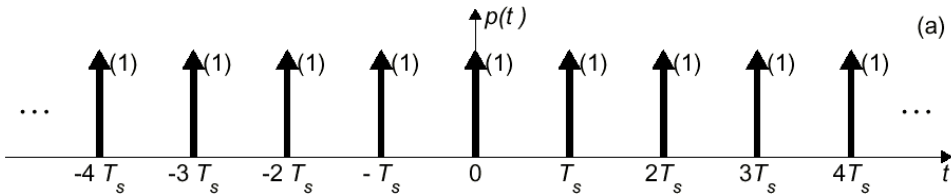

$$p(t) = \sum_{n=-\infty}^{\infty} \delta(t - nT_s) = \sum_{k=-\infty}^{\infty} a_k e^{jk\omega_s t}$$

$$a_k = \frac{1}{T_s} \int_{-T_s/2}^{T_s/2} \delta(t) e^{-jk\omega_s t} dt = \frac{1}{T_s} \quad \omega_s = \frac{2\pi}{T_s}$$

# Impulse Train Sampling

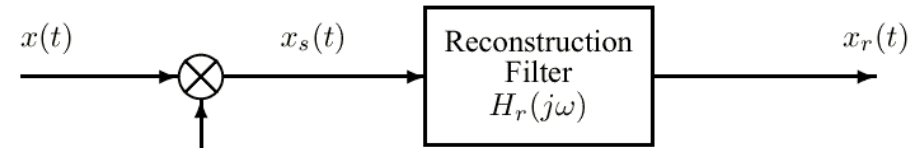


$$p(t) = \sum_{n=-\infty}^{\infty} \delta(t - nT_s)$$


$$x_s(t) = x(t) \sum_{n=-\infty}^{\infty} \delta(t - nT_s) = \sum_{n=-\infty}^{\infty} x(t) \delta(t - nT_s)$$

$$x_s(t) = \sum_{n=-\infty}^{\infty} x(nT_s) \delta(t - nT_s)$$

# Illustration of Sampling

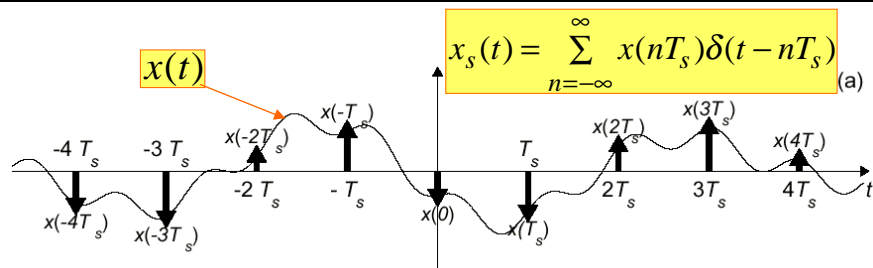


$$x_s(t) = \sum_{n=-\infty}^{\infty} x(nT_s) \delta(t - nT_s)$$

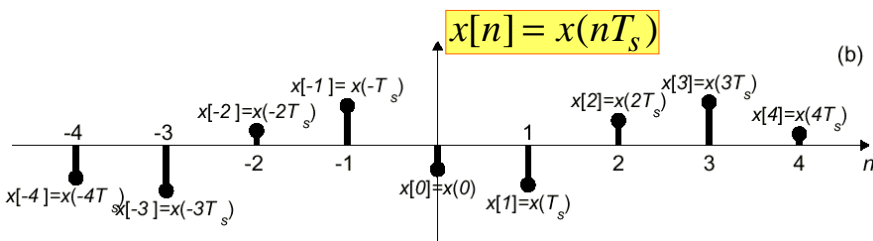

$$x[n] = x(nT_s)$$

# Sampling: Freq. Domain

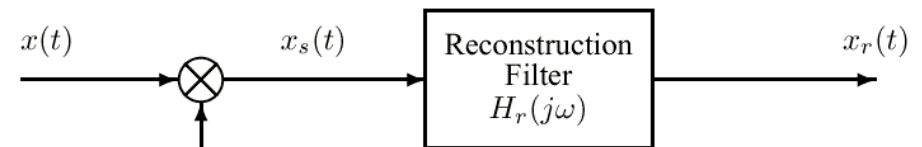

$$p(t) = \sum_{k=-\infty}^{\infty} a_k e^{jk\omega_s t}$$

**EXPECT  
FREQUENCY  
SHIFTING !!!**

$$p(t) = \sum_{n=-\infty}^{\infty} \delta(t - nT_s) = \sum_{k=-\infty}^{\infty} a_k e^{jk\omega_s t}$$

# Frequency-Domain Analysis

$$x_s(t) = x(t) \sum_{n=-\infty}^{\infty} \delta(t - nT_s) = \sum_{n=-\infty}^{\infty} x(nT_s) \delta(t - nT_s)$$

$$x_s(t) = x(t) \sum_{k=-\infty}^{\infty} \frac{1}{T_s} e^{jk\omega_s t} = \frac{1}{T_s} \sum_{k=-\infty}^{\infty} x(t) e^{jk\omega_s t}$$

$$X_s(j\omega) = \frac{1}{T_s} \sum_{k=-\infty}^{\infty} X(j(\omega - k\omega_s))$$


$$\omega_s = \frac{2\pi}{T_s}$$

# Frequency-Domain Representation of Sampling

"Typical" bandlimited signal




$$X_s(j\omega) = \frac{1}{T_s} \sum_{k=-\infty}^{\infty} X(j(\omega - k\omega_s))$$

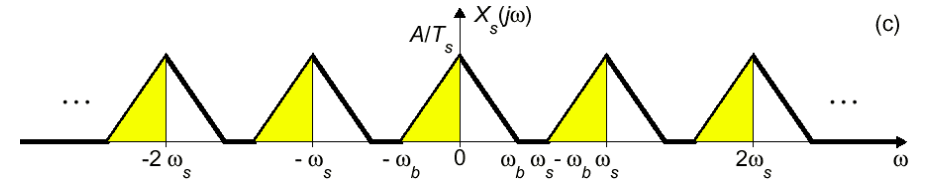


# Aliasing Distortion

- If  $\omega_s < 2\omega_b$ , the copies of  $X(j\omega)$  overlap, and we have **aliasing distortion**.

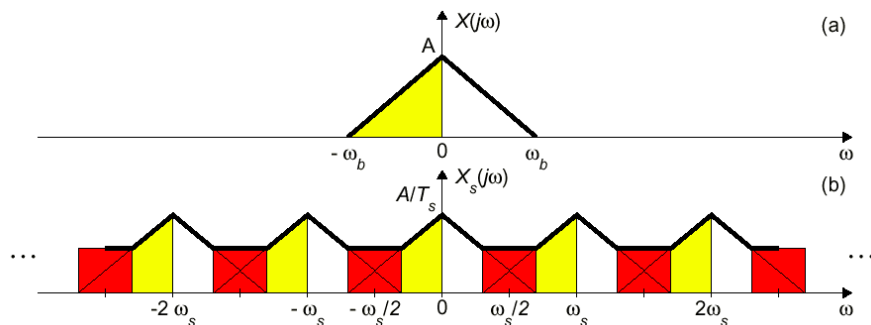

# Reconstruction of $x(t)$

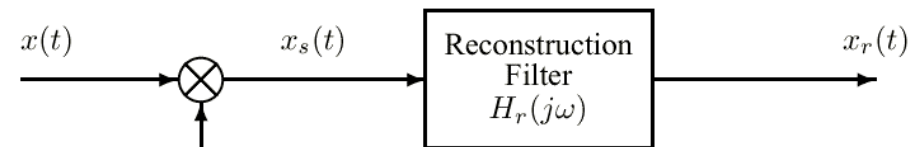


$$x_s(t) = \sum_{n=-\infty}^{\infty} x(nT_s) \delta(t - nT_s)$$

$$X_s(j\omega) = \frac{1}{T_s} \sum_{k=-\infty}^{\infty} X(j(\omega - k\omega_s))$$

$$X_r(j\omega) = H_r(j\omega) X_s(j\omega)$$


# Reconstruction in the Frequency-Domain

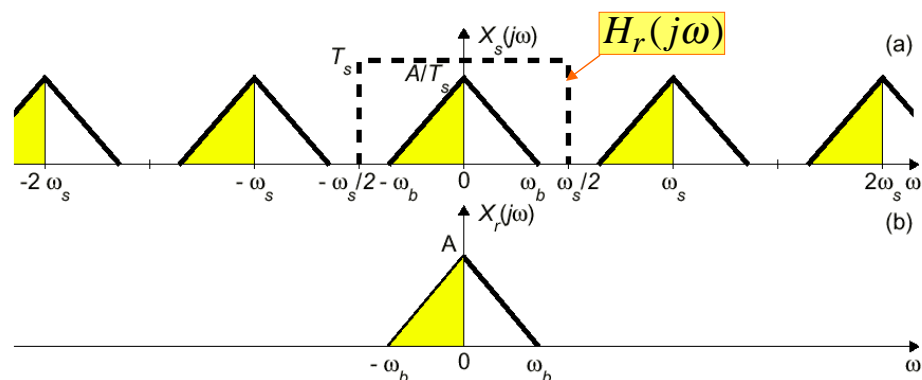


- If  $\omega_s > 2\omega_b$ , the copies of  $X(j\omega)$  do not overlap, so  $X_r(j\omega) = H_r(j\omega) X_s(j\omega)$ .

# Ideal Reconstruction Filter

$$H_r(j\omega) = \begin{cases} T_s & |\omega| < \frac{\pi}{T_s} \\ 0 & |\omega| > \frac{\pi}{T_s} \end{cases}$$

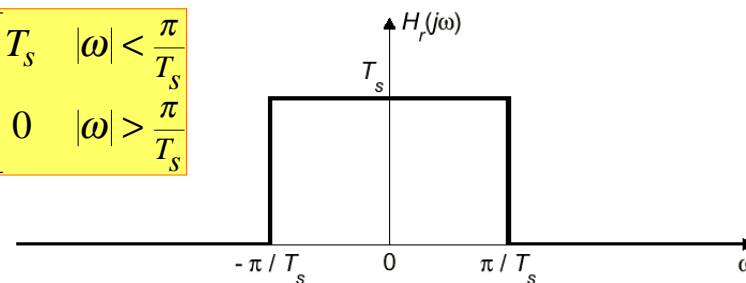

$$h_r(t) = \frac{\sin \frac{\pi}{T_s} t}{\frac{\pi}{T_s} t}$$

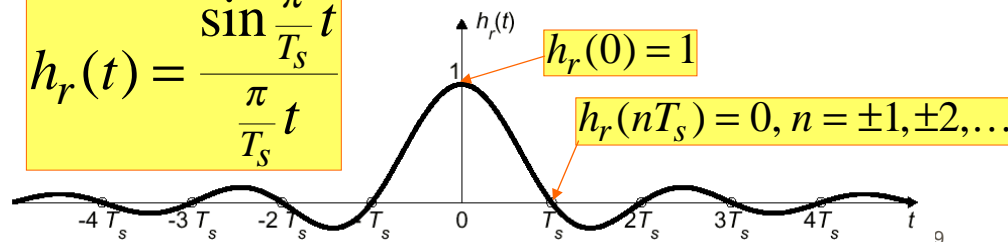

# Signal Reconstruction

$$x_r(t) = h_r(t) * x_s(t) = h_r(t) * \sum_{n=-\infty}^{\infty} x(nT_s) \delta(t - nT_s)$$

$$x_r(t) = \sum_{n=-\infty}^{\infty} x(nT_s) h_r(t - nT_s)$$

$$x_r(t) = \sum_{n=-\infty}^{\infty} x(nT_s) \frac{\sin \frac{\pi}{T_s} (t - nT_s)}{\frac{\pi}{T_s} (t - nT_s)}$$

**Ideal bandlimited interpolation formula**


# Shannon Sampling Theorem

- "SINC" Interpolation** is the ideal
  - PERFECT RECONSTRUCTION
  - of BANDLIMITED SIGNALS


A signal  $x(t)$  with bandlimited Fourier transform such that  $X(j\omega) = 0$  for  $|\omega| \geq \omega_b$  can be reconstructed exactly from samples taken with sampling rate  $\omega_s = 2\pi/T_s \geq 2\omega_b$  using the following bandlimited interpolation formula:

$$x_r(t) = \sum_{n=-\infty}^{\infty} x(nT_s) \frac{\sin \left[ \frac{\pi}{T_s} (t - nT_s) \right]}{\frac{\pi}{T_s} (t - nT_s)}$$

# Reconstruction in Time-Domain

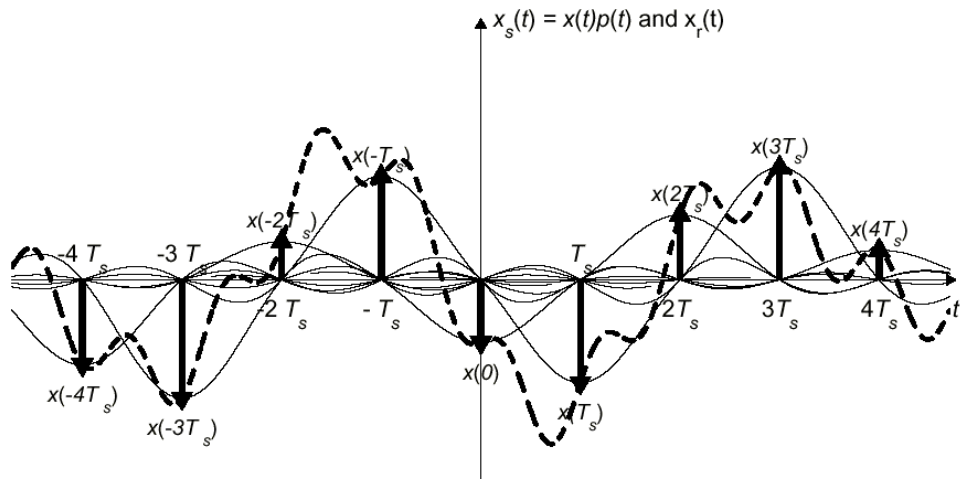

# Ideal C-to-D and D-to-C

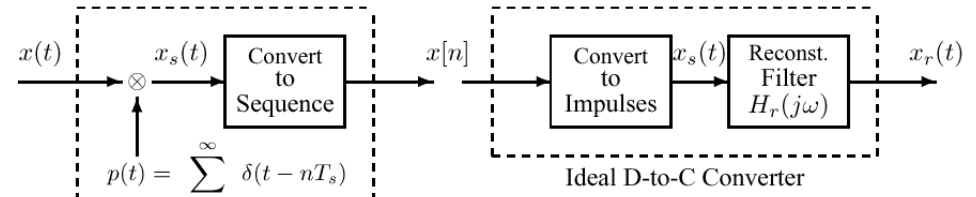

$$x[n] = x(nT_s)$$

**Ideal Sampler**

$$X_s(j\omega) = \frac{1}{T_s} \sum_{k=-\infty}^{\infty} X(j(\omega - k\omega_s))$$

$$x_r(t) = \sum_{n=-\infty}^{\infty} x[n] \frac{\sin \frac{\pi}{T_s}(t - nT_s)}{\frac{\pi}{T_s}(t - nT_s)}$$

**Ideal bandlimited interpolator**

$$X_r(j\omega) = H_r(j\omega) X_s(j\omega)$$