

EE-2025

Fall-2000

Lecture 11

Frequency Response of FIR
2-Oct-00

Info: Web-CT, Lab, HW


- Lab #6: FIR Filtering of Images
 - Lab Quiz during Lab #6
 - You can consult your lab reports and also use MATLAB during the Lab Quiz
- Prob Set #5 due **this week**
- Quiz #2 on 20-Oct (Friday)

9/29/00

EE-2025 Fall-00 mhh/jMc

2

Moore's Law for TI DSPs

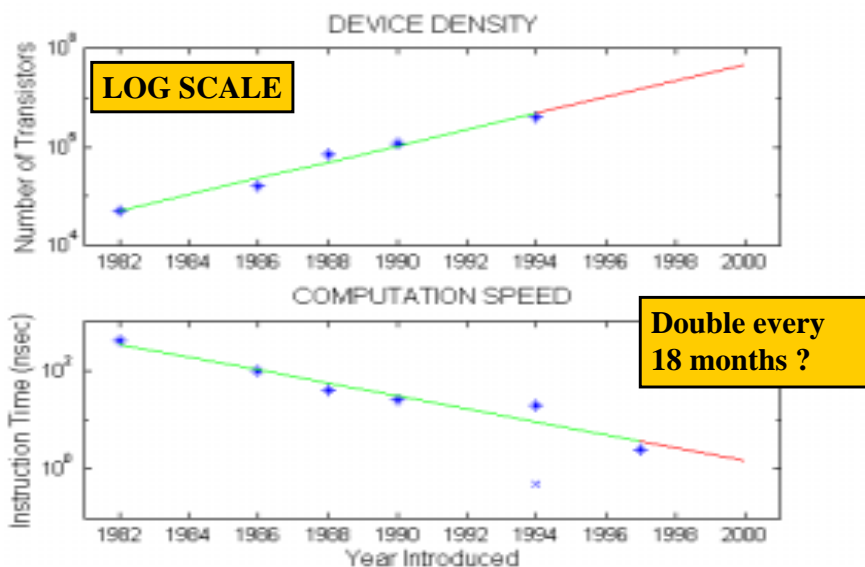

DEBUGGING

- "Any Fool" can write code
- Debugging is the interesting part
 - It takes talent !!!
- HOWEVER,
 - Assume the **stupid** mistake is the problem

9/29/00

EE-2025 Fall-00 mhh/jMc

LECTURE

4

Lecture 11

Frequency Response of FIR

READING ASSIGNMENTS

- This Lecture:
 - Chapter 6, pp. 157-165, 169-176
- Other Reading:
 - Recitation: Ch. 6, pp. 176-188
 - FREQUENCY RESPONSE EXAMPLES
 - Next Lecture: Chapter 6, pp. 188-194

LECTURE OBJECTIVES

- **SINUSOIDAL** INPUT SIGNAL
 - DETERMINE the FIR FILTER OUTPUT
- **FREQUENCY RESPONSE** of FIR
 - PLOTTING vs. Frequency
 - MAGNITUDE vs. Freq
 - PHASE vs. Freq

$$H(\hat{\omega}) = |H(\hat{\omega})| e^{j\phi(\hat{\omega})}$$

DOMAINS: Time & Frequency

- **Time-Domain: "n" = time**
 - $x[n]$ discrete-time signal
 - $x(t)$
- **Frequency Domain (sum of sinusoids)**
 - Spectrum vs. f (Hz)
 - ANALOG vs. DIGITAL
 - Spectrum vs. ω -hat
- Move back and forth **QUICKLY**

LTI SYSTEMS

- LTI: **L**inear & **T**ime-**I**nvariant
- COMPLETELY CHARACTERIZED by:
 - **IMPULSE RESPONSE** $h[n]$
 - **CONVOLUTION**: $y[n] = x[n] * h[n]$
 - The “rule” defining the system can ALWAYS be re-written as convolution
- FIR Example: $h[n]$ is same as b_k

9/29/00

EE-2025 2000 rws/fjMc

5

POP QUIZ

- FIR Filter is “FIRST DIFFERENCE”
 - $y[n] = x[n] - x[n-1]$
- Write output as a convolution
 - Need impulse response

$$h[n] = \delta[n] - \delta[n-1]$$

- Then, another way to compute the output:


$$y[n] = (\delta[n] - \delta[n-1]) * x[n]$$

9/29/00

EE-2025 2000 rws/fjMc

6

DIGITAL “FILTERING”

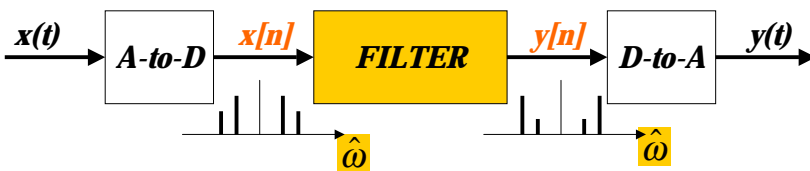

- CONCENTRATE on the **SPECTRUM**
- SINUSOIDAL INPUT
 - INPUT $x[n] = \text{SUM of SINUSOIDS}$
 - Then, OUTPUT $y[n] = \text{SUM of SINUSOIDS}$

9/29/00

EE-2025 2000 rws/fjMc

7

FILTERING EXAMPLE

- 7-point AVERAGER

$$y_7[n] = \sum_{k=0}^6 \left(\frac{1}{7}\right) x[n-k]$$

- Removes cosine
 - By making its amplitude (A) smaller

- 3-point AVERAGER

$$y_3[n] = \sum_{k=0}^2 \left(\frac{1}{3}\right) x[n-k]$$


- Changes A slightly

9/29/00


EE-2025 2000 rws/fjMc

9

3-pt AVG EXAMPLE

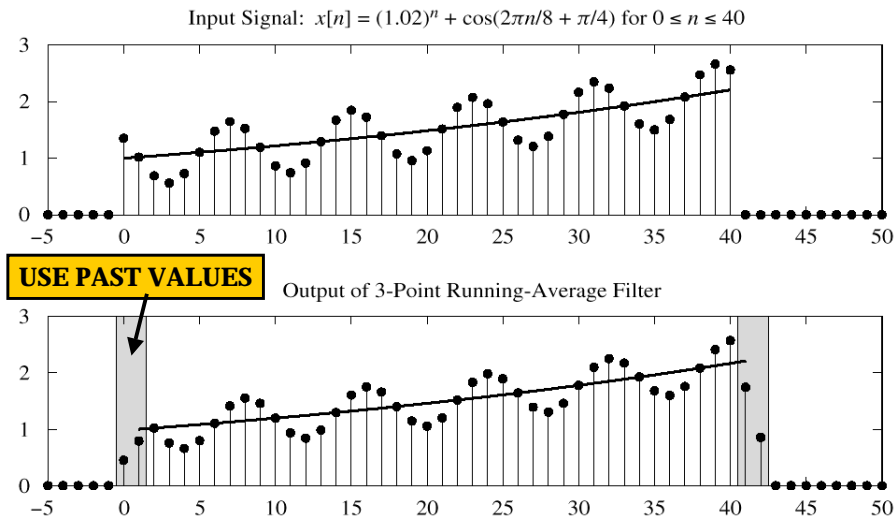


7-pt FIR EXAMPLE (AVG)

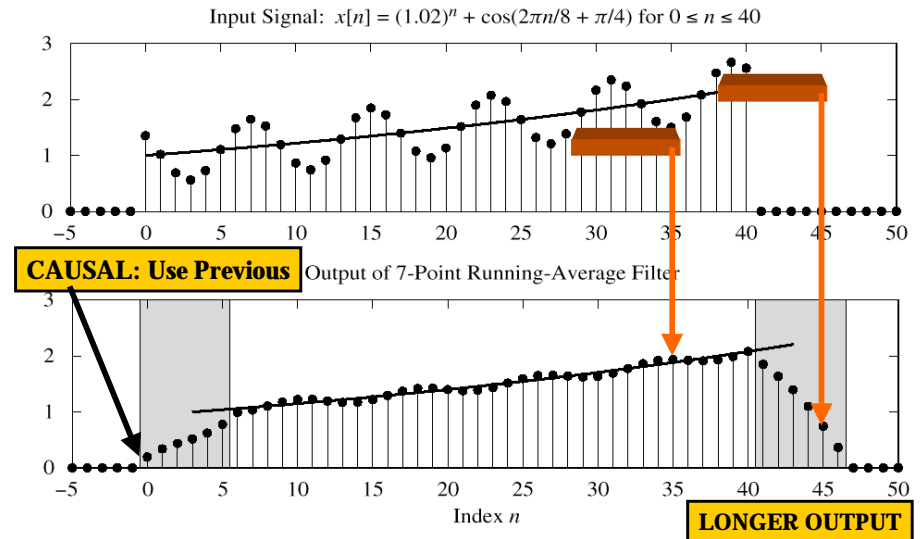

SINUSOIDAL RESPONSE

- INPUT: $x[n] = \text{SINUSOID}$
- OUTPUT: $y[n]$ will also be a SINUSOID
 - Different Amplitude and Phase
 - **SAME** Frequency
- AMPLITUDE & PHASE CHANGE
 - Called the **FREQUENCY RESPONSE**

CONVDEMO: MATLAB GUI

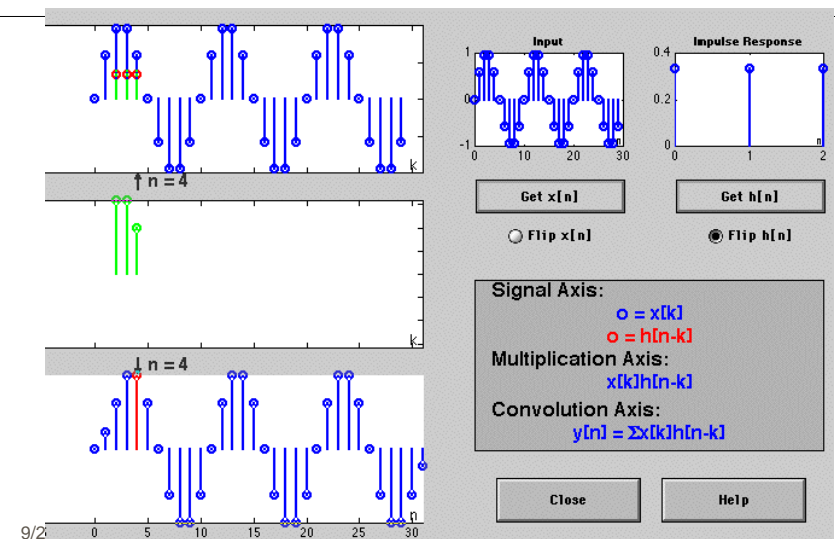

COMPLEX EXPONENTIAL

$$x[n] = Ae^{j\phi} e^{j\hat{\omega}n} \quad -\infty < n < \infty$$

$x[n]$ is the input signal—a complex exponential

$$y[n] = \sum_{k=0}^M b_k x[n-k] = \sum_{k=0}^M h[k] x[n-k]$$

FIR DIFFERENCE EQUATION

COMPLEX EXP OUTPUT

- Use the FIR "Difference Equation"

$$\begin{aligned} y[n] &= \sum_{k=0}^M b_k x[n-k] = \sum_{k=0}^M b_k Ae^{j\phi} e^{j\hat{\omega}(n-k)} \\ &= \left(\sum_{k=0}^M b_k e^{j\hat{\omega}(-k)} \right) Ae^{j\phi} e^{j\hat{\omega}(n)} \end{aligned}$$

$$= H(\hat{\omega}) Ae^{j\phi} e^{j\hat{\omega}(n)}$$

FREQUENCY RESPONSE

- At each frequency, we can **DEFINE**

$$H(\hat{\omega}) = \sum_{k=0}^M b_k e^{-j\hat{\omega}k}$$

FREQUENCY RESPONSE

- Complex-valued formula
 - Has **MAGNITUDE** vs. frequency
 - And **PHASE** vs. frequency

EXAMPLE 6.1

Example 6.1

$$\{b_k\} = \{1, 2, 1\}$$

$$\mathcal{H}(\hat{\omega}) = 1 + 2e^{-j\hat{\omega}} + e^{-j\hat{\omega}2}$$

To obtain formulas for the magnitude and phase of the frequency response

$$\mathcal{H}(\hat{\omega}) = 1 + 2e^{-j\hat{\omega}} + e^{-j\hat{\omega}2}$$


$$= e^{-j\hat{\omega}} (e^{j\hat{\omega}} + 2 + e^{-j\hat{\omega}})$$

$$= e^{-j\hat{\omega}} (2 + 2 \cos \hat{\omega})$$

EXPLOIT SYMMETRY


Since $(2 + 2 \cos \hat{\omega}) \geq 0$ for frequencies $-\pi < \hat{\omega} \leq \pi$,
the magnitude is $|\mathcal{H}(\hat{\omega})| = (2 + 2 \cos \hat{\omega})$
and the phase is $\angle \mathcal{H}(\hat{\omega}) = -\hat{\omega}$.

Magnitude of Frequency Response of FIR Filter with Coefficients [1, 2, 1]

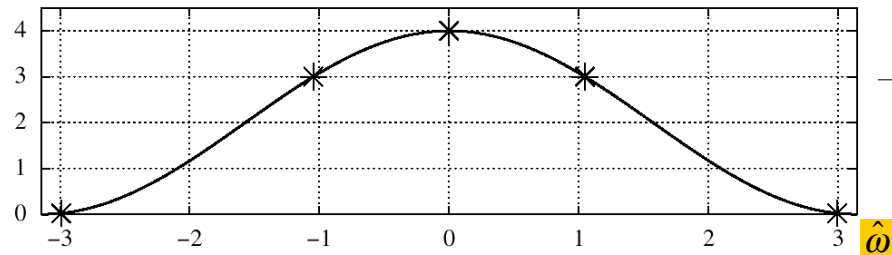

$$H(\hat{\omega}) = (2 + 2 \cos \hat{\omega})e^{-j\hat{\omega}}$$

Phase Angle of Frequency Response of FIR Filter with Coefficients [1, 2, 1]

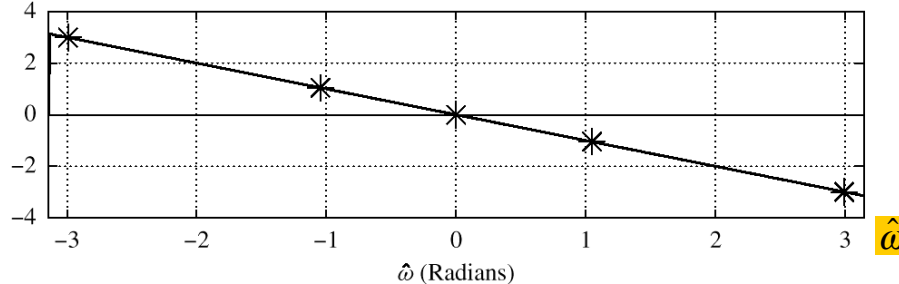

MATLAB: FREQUENCY RESPONSE

■ **HH = freqz(bb,1,ww)**

■ VECTOR **bb** contains Filter Coefficients

■ DSP-First: **HH = freekz(bb,1,ww)**

■ FILTER COEFFICIENTS $\{b_k\}$

$$H(\hat{\omega}) = \sum_{k=0}^M b_k e^{-j\hat{\omega}k}$$

9/29/00

EE-2025 2000 rws/jMc

19

LTI SYSTEMS

■ LTI: Linear & Time-Invariant

■ **COMPLETELY CHARACTERIZED** by:

■ FREQUENCY RESPONSE, or

■ IMPULSE RESPONSE $h[n]$

■ Sinusoid IN -----> Sinusoid OUT

■ At the SAME Frequency

Time & Frequency Relation

■ Get Frequency Response from $h[n]$

■ Here is the FIR case:

$$H(\hat{\omega}) = \sum_{k=0}^M b_k e^{-j\hat{\omega}k} = \sum_{k=0}^M h[k] e^{-j\hat{\omega}k}$$

IMPULSE RESPONSE

9/29/00

EE-2025 2000 rws/jMc

20


9/29/00

EE-2025 2000 rws/jMc

21

BLOCK DIAGRAMS

Equivalent Representations

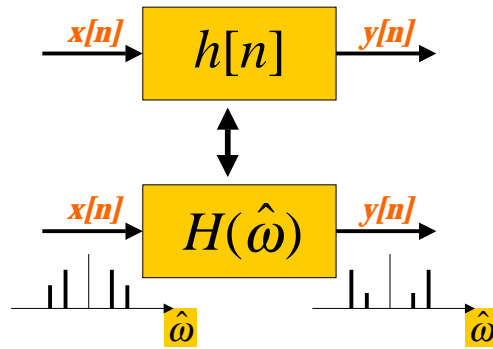


9/29/00

EE-2025 2000 rws/jMc

22

UNIT-DELAY SYSTEM

Find $h[n]$ and $H(\hat{\omega})$ for $y[n] = x[n-1]$

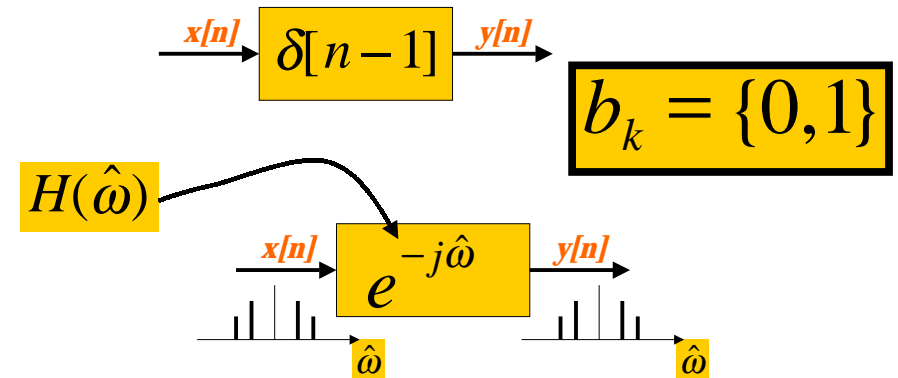

9/29/00


EE-2025 2000 rws/jMc

23

FIRST DIFFERENCE SYSTEM

Find $h[n]$ and $H(\hat{\omega})$ for the Diff. Eqn:

$$y[n] = x[n] - x[n-1]$$

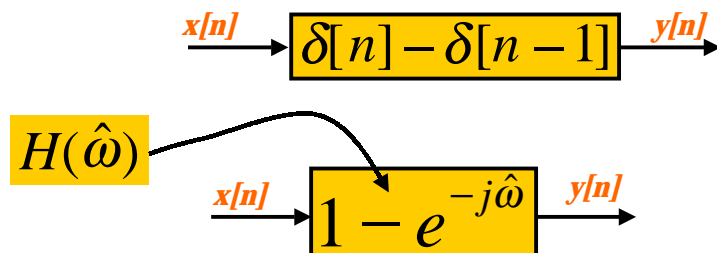

9/29/00

EE-2025 2000 rws/jMc

24

CASCADE SYSTEMS

Does the order of S_1 & S_2 matter?

- NO, LTI SYSTEMS can be rearranged !!!
- WHAT ARE THE FILTER COEFFS? $\{b_k\}$
- WHAT is the overall FREQUENCY RESPONSE ?

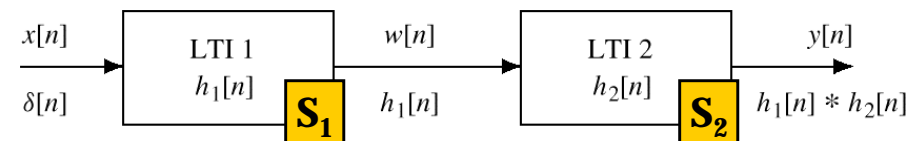


Figure 5.19 A Cascade of Two LTI Systems.


9/29/00

EE-2025 2000 rws/jMc

25

CASCADE EQUIVALENT

■ **MULTIPLY** the Frequency Responses



**EQUIVALENT
SYSTEM**

$$H(\hat{\omega}) = H_1(\hat{\omega})H_2(\hat{\omega})$$