

EE-2025

Fall-2000

Lecture 14  
Zeros of  $H(z)$   
Frequency Domain  
13-Oct-00

## Info: Quiz #2

- Quiz #2 is 20-Oct (Friday)
  - Coverage: HW #3 -- #7
  - One page of notes (8.5 by 11, two sided)
  - Calculator
- Review Session 7:30pm on Thursday
  - ECE Auditorium
- Prob Set #7 is due next week
  - Solution will be posted Thurs nite @ 7:30pm

10/12/00

EE-2025 Fall-00 mhh/jMc


2

## Info: Web-CT, Lab, HW

- Get NEW CHAPTERS
  - Continuous-Time Signals & Systems
  - PDF (Web-CT) or Bookstore
- Lab #8 on Bandpass Filtering
  - Spans two weeks over the break

## NOBEL PRIZE WINNER

- Integrated Circuit: 1959 by Jack Kilby
  - <http://www.eepatents.com/feature/>

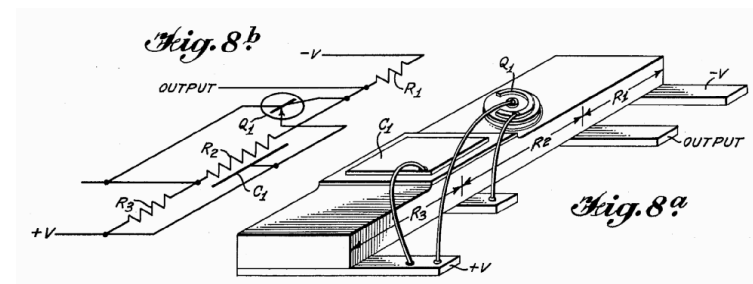

10/12/00

EE-2025 Fall-00 mhh/jMc

3

10/12/00

EE-2025 Fall-00 mhh/jMc

LECTURE

4

Lecture 14  
Zeros of  $H(z)$   
Frequency Domain

## READING ASSIGNMENTS

- This Lecture:
  - Chapter 7, pp. 220-230
- Other Reading:
  - Recitation & Lab: Ch. 7, pp. 220-239
    - ZEROS (and POLES)
  - Next Lecture: Notes on Continuous-Time

## LECTURE OBJECTIVES

- ZEROS and POLES
- Relate  $H(z)$  to FREQUENCY RESPONSE

$$H(\hat{\omega}) = H(z) \Big|_{z=e^{j\hat{\omega}}}$$

- **THREE DOMAINS:**

- Show Relationship for FIR:

$$h[n] \leftrightarrow H(z) \leftrightarrow H(e^{j\hat{\omega}})$$

## DESIGN PROBLEM

- Example:
  - Design a Lowpass FIR filter (Find  $b_k$ )
  - Reject completely  $0.7\pi$ ,  $0.8\pi$ , and  $0.9\pi$
  - Estimate the filter length needed to accomplish this task. How many  $b_k$ ?
- Z POLYNOMIALS provide the TOOLS

## Z-Transform DEFINITION

- POLYNOMIAL Representation of LTI SYSTEM:

$$H(z) = \sum_n h[n] z^{-n}$$

APPLIES to Any SIGNAL

- EXAMPLE:

$$\{h[n]\} = \{2, 0, -3, 0, 2\}$$

$$H(z) = 2z^{-0} + 0z^{-1} - 3z^{-2} + 0z^{-3} + 2z^{-4}$$

$$= 2 - 3z^{-2} + 2z^{-4}$$

$$= 2 - 3(z^{-1})^2 + 2(z^{-1})^4$$

POLYNOMIAL in  $z^{-1}$

## CONVOLUTION PROPERTY

- Convolution in the  $n$ -domain  
 | SAME AS  
 Multiplication in the  $z$ -domain

$$y[n] = h[n] * x[n] \Leftrightarrow Y(z) = H(z)X(z)$$


$$y[n] = h[n] * x[n]$$

$$= \sum_{k=0}^M h[k]x[n-k]$$

FIR Filter

MULTIPLY Z-TRANSFORMS

## CONVOLUTION EXAMPLE



$$x[n] = \delta[n-1] + 2\delta[n-2] \quad h[n] = \delta[n] - \delta[n-1]$$

$$y[n] = x[n] * h[n]$$

$$X(z) = z^{-1} + 2z^{-2}$$


$$H(z) = 1 - z^{-1}$$

$$Y(z) = (z^{-1} + 2z^{-2})(1 - z^{-1}) = z^{-1} + z^{-2} - 2z^{-3}$$

$$y[n] = \delta[n-1] + \delta[n-2] - 2\delta[n-3]$$

## CASCADE EQUIVALENT


- Multiply the System Functions



EQUIVALENT SYSTEM

$$H(z) = H_1(z)H_2(z)$$

## CASCADE EXAMPLE

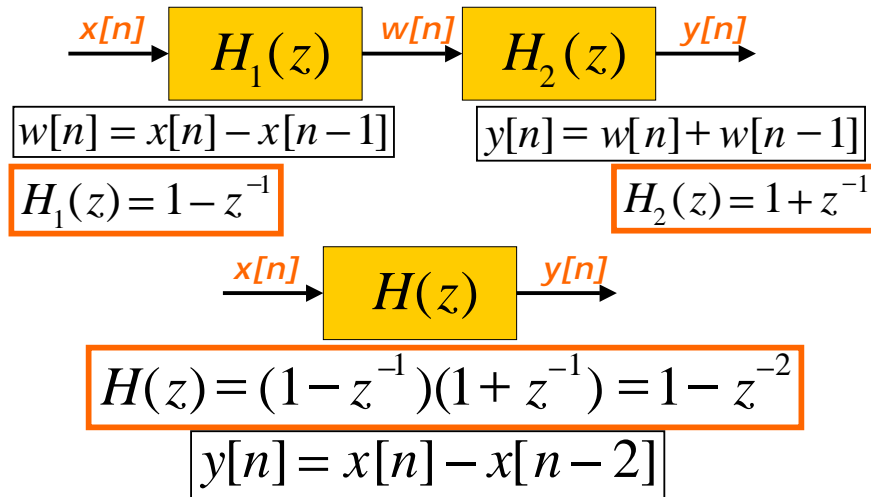


10/11/00

EE-2025 2000 rws/jMc

9

## THREE DOMAINS

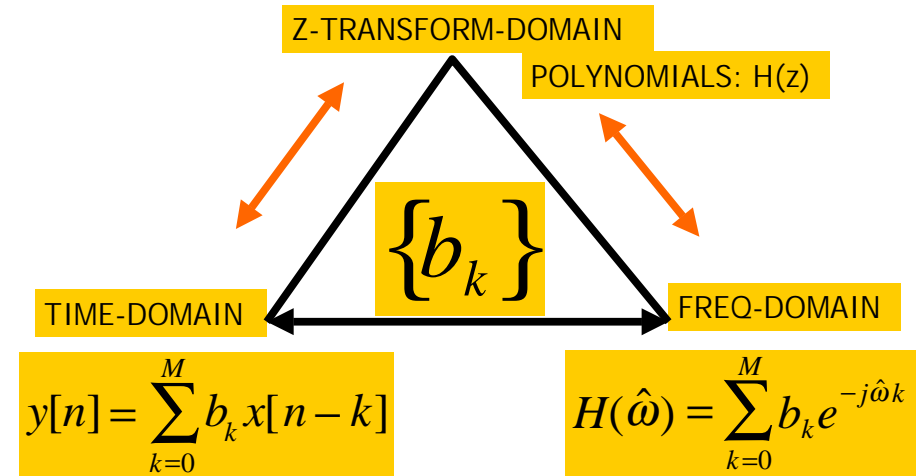


10/11/00

EE-2025 2000 rws/jMc

10

## FREQUENCY RESPONSE ?

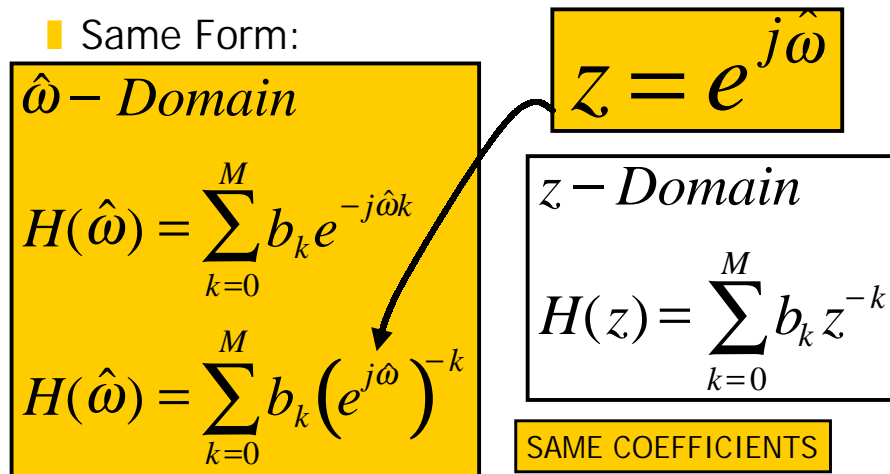

10/11/00

EE-2025 2000 rws/jMc

11

## CHANGE in NOTATION

- Relate  $H(z)$  to FREQUENCY RESPONSE

$$H(\hat{\omega}) = H(z) \Big|_{z=e^{j\hat{\omega}}}$$

- NEW NOTATION for FREQUENCY RESPONSE

$$H(\hat{\omega}) \leftrightarrow H(e^{j\hat{\omega}})$$

10/11/00

EE-2025 2000 rws/jMc

12

## ANOTHER ANALYSIS TOOL

- z-Transform POLYNOMIALS are EASY !
  - ▮ ROOTS, FACTORS, etc.
- **ZEROS and POLES: where is  $H(z) = 0$ ?**
- The z-domain is **COMPLEX**
  - ▮  $H(z)$  is a **COMPLEX-VALUED** function of a **COMPLEX VARIABLE**  $z$ .

10/11/00

EE-2025 2000 rws/jMc

13

## ZEROS of $H(z)$

- Find  $z$ , where  $H(z)=0$

$$H(z) = 1 - \frac{1}{2} z^{-1}$$

$$1 - \frac{1}{2} z^{-1} = 0 ?$$

$$z - \frac{1}{2} = 0$$

$$\text{Zero at: } z = \frac{1}{2}$$

10/11/00

EE-2025 2000 rws/jMc

14

## ZEROS of $H(z)$

- Find  $z$ , where  $H(z)=0$ 
  - ▮ Interesting when  $z$  is ON the unit circle.

$$H(z) = 1 - 2z^{-1} + 2z^{-2} - z^{-3}$$

$$H(z) = (1 - z^{-1})(1 - z^{-1} + z^{-2})$$


$$\text{Roots: } z = 1, \frac{1}{2} \pm j\frac{\sqrt{3}}{2} \quad \boxed{e^{\pm j\pi/3}}$$

10/11/00

EE-2025 2000 rws/jMc

15

## PLOT ZEROS in z-DOMAIN

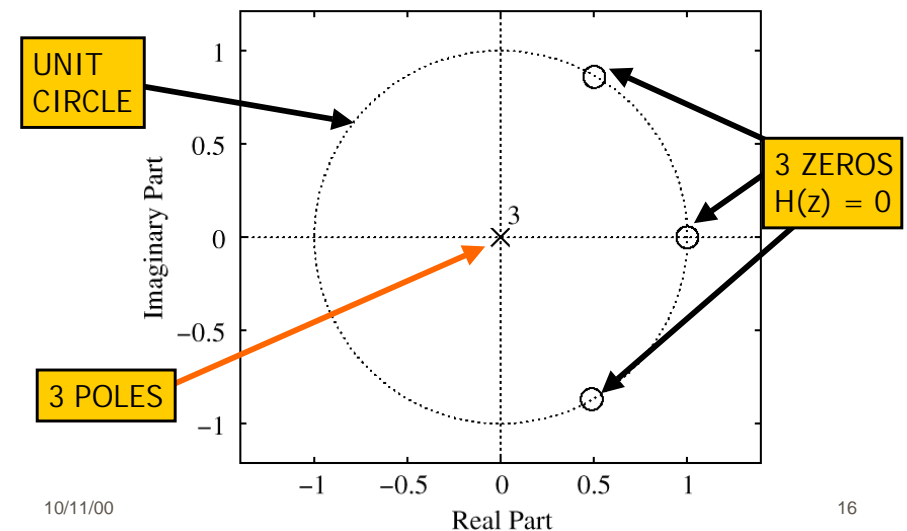

10/11/00

16

## POLES of $H(z)$

Find  $z$ , where  $H(z) \rightarrow \infty$

Not very interesting for the FIR case

$$H(z) = 1 - 2z^{-1} + 2z^{-2} - z^{-3}$$

$$H(z) = \frac{z^3 - 2z^2 + 2z - 1}{z^3}$$

Three Poles at:  $z = 0$

## FREQ. RESPONSE from ZEROS

$$H(e^{j\hat{\omega}}) = H(z) \Big|_{z=e^{j\hat{\omega}}}$$

Relate  $H(z)$  to FREQUENCY RESPONSE

EVALUATE  $H(z)$  on the **UNIT CIRCLE**


ANGLE is same as FREQUENCY

$$z = e^{j\hat{\omega}} \quad (\text{as } \hat{\omega} \text{ varies})$$

defines a **CIRCLE**, radius = 1


$$\mathcal{H}(\hat{\omega}) = H(e^{j\hat{\omega}}) = H(z) \Big|_{z=e^{j\hat{\omega}}}$$

The Complex  $z$ -Plane

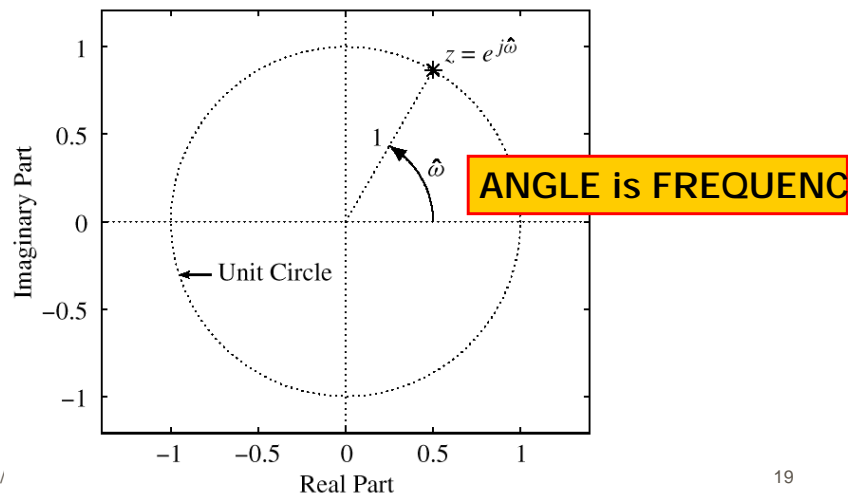


## FIR Frequency Response


Magnitude of Frequency Response for  $h[n] = 1, -2, 2, -1$

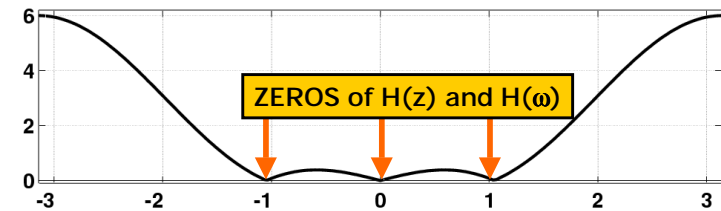

Phase Angle of Frequency Response for  $h[n] = 1, -2, 2, -1$

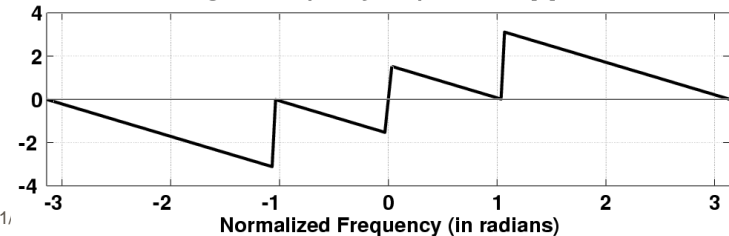

### 3 DOMAINS MOVIE: FIR

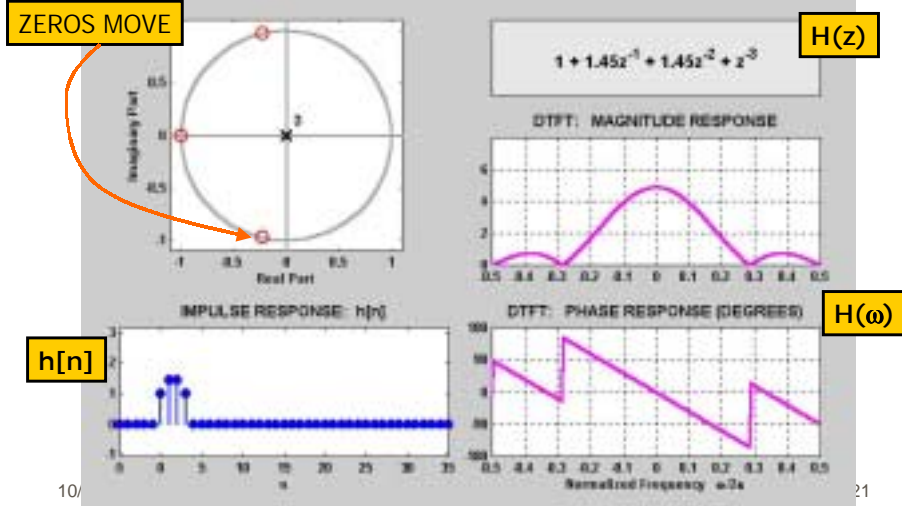


### NULLING PROPERTY of H(z)


- When  $H(z)=0$  on the unit circle.
  - Find inputs  $x[n]$  that give zero output

$$H(z) = 1 - 2z^{-1} + 2z^{-2} - z^{-3}$$

$$H(e^{j\hat{\omega}}) = 1 - 2e^{-j\hat{\omega}} + 2e^{-j2\hat{\omega}} - e^{-j3\hat{\omega}}$$

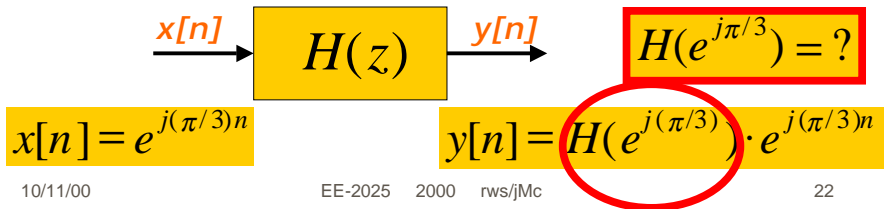

### PLOT ZEROS in z-DOMAIN

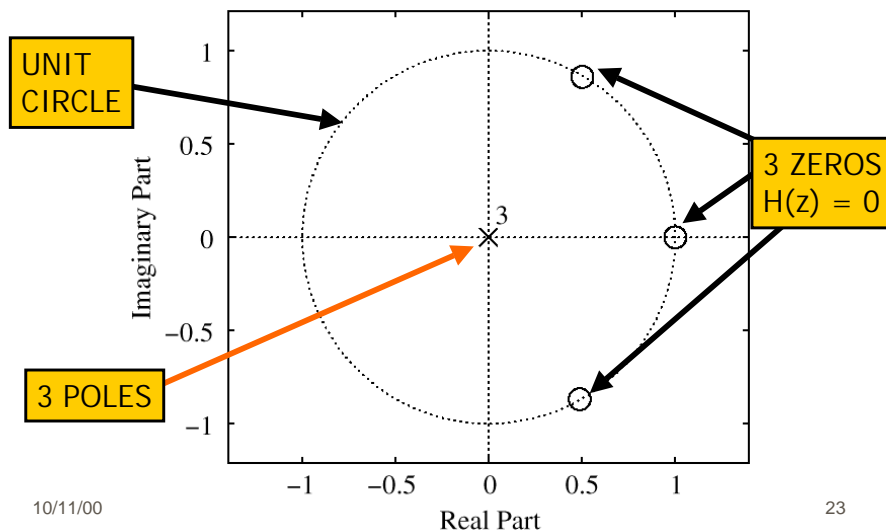

### NULLING PROPERTY of H(z)

- Evaluate  $H(z)$  at the input "frequency"

$$H(e^{j\hat{\omega}}) = 1 - 2e^{-j\hat{\omega}} + 2e^{-j2\hat{\omega}} - e^{-j3\hat{\omega}}$$

$$y[n] = H(e^{j\pi/3}) \cdot e^{j(\pi/3)n}$$

$$y[n] = (1 - 2e^{-j\pi/3} + 2e^{-j2\pi/3} - e^{-j3\pi/3}) \cdot e^{j(\pi/3)n}$$

$$(1 - 2(\frac{1}{2} - j\frac{\sqrt{3}}{2}) + 2(-\frac{1}{2} - j\frac{\sqrt{3}}{2}) + 1)$$

$$y[n] = (1 - 1 + j\sqrt{3} - 1 - j\sqrt{3} + 1) \cdot e^{j(\pi/3)n} = 0$$