

EE-2025

Fall-2000

Lecture 17

Convolution (Continuous-Time)

30-Oct-00

Info: Web-CT, Lab, HW

- Calendar:
 - Quiz #3 is 20-Nov
- Get NEW CHAPTERS
 - PDF or Bookstore
- Prob Set #8 is due this week
- Lab #8 is due 31-Oct thru 6-Nov
- Lab QUIZ next WEEK


10/28/00

ECE-2025 Fall-00 mhh/jMc

2

Lab #9 GUIs

- Download: users.ece.gatech.edu/jr

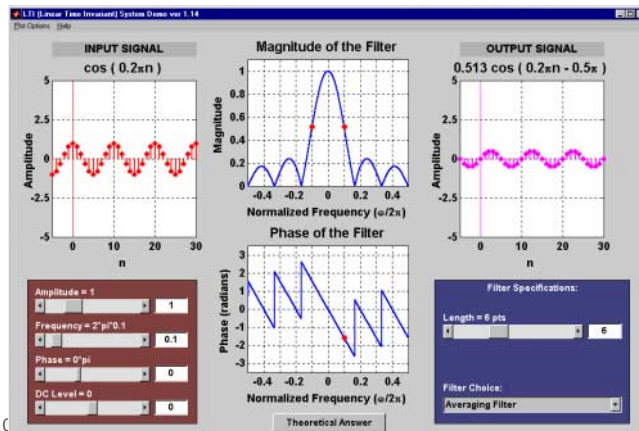

10

3

LECTURE

Education

- The only product where the consumer tries to get as LITTLE as possible for his/her money !
 - Lecture attendance

10/28/00

ECE-2025 Fall-00 mhh/jMc

4

Lecture 17
Convolution
(Continuous-Time)

READING ASSIGNMENTS

- This Lecture:
 - Chapter 10, pp. 1020-1041
- Other Reading:
 - Recitation: Ch. 10, pp. 1020-1029
 - Next Lecture: Start reading Chapter 11

LECTURE OBJECTIVES

- Review of C-T LTI systems
- Evaluating convolutions
 - Examples
 - Impulses
- LTI Systems
 - Cascade and parallel connections
 - Stability and causality


Linear and Time-Invariant (LTI) Systems

- If a continuous-time system is both linear and time-invariant, then the output $y(t)$ is related to the input $x(t)$ by a **convolution integral**

$$y(t) = \int_{-\infty}^{\infty} x(\tau)h(t-\tau)d\tau = x(t) * h(t)$$

where $h(t)$ is the **impulse response** of the system.

Testing for Linearity

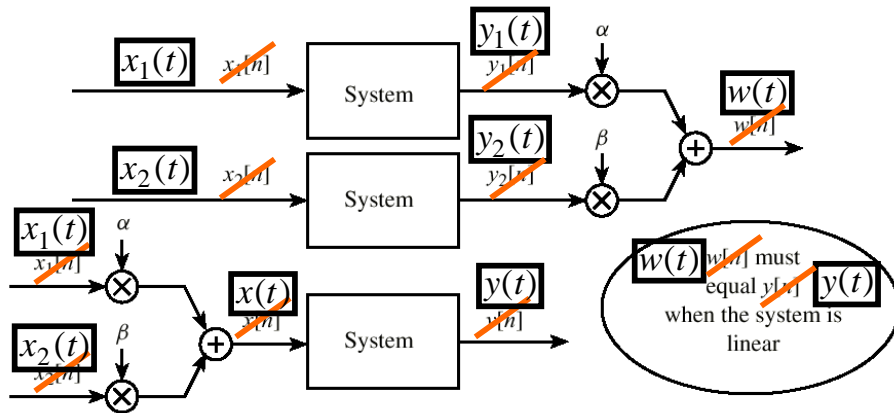


10/28/00

ECE-2025 2000 rws/jMc

5

Testing Time-Invariance

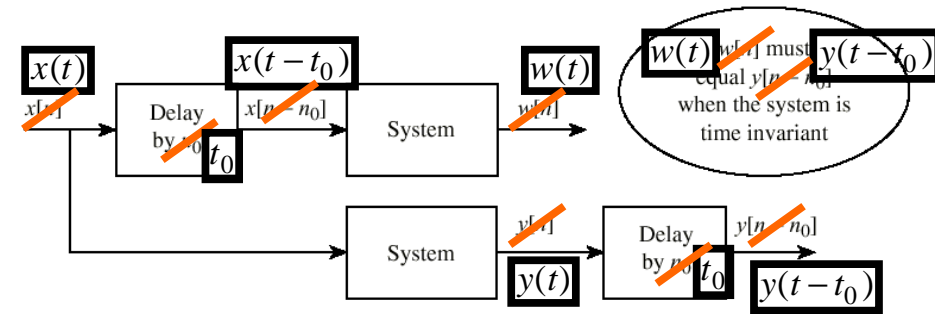

10/28/00

ECE-2025 2000 rws/jMc

6

Ideal Delay: $y(t) = x(t - t_d)$

- Linear

$$ax_1(t - t_d) + bx_2(t - t_d) = ay_1(t) + by_2(t)$$

- and Time-Invariant

$$w(t) = x((t - t_0) - t_d)$$

$$y(t - t_0) = x((t - t_0) - t_d)$$

10/28/00

ECE-2025 2000 rws/jMc

7

Integrator: $y(t) = \int_{-\infty}^t x(\tau) d\tau$

- Linear

$$\int_{-\infty}^t [ax_1(\tau) + bx_2(\tau)] d\tau = ay_1(t) + by_2(t)$$

- And Time-Invariant

$$w(t) = \int_{-\infty}^t x(\tau - t_0) d\tau \quad \text{let } \sigma = \tau - t_0$$

$$\Rightarrow w(t) = \int_{-\infty}^{t-t_0} x(\sigma) d\sigma = y(t - t_0)$$

10/28/00

8

Modulator: $y(t) = [A + x(t)]\cos\omega_c t$

- **Not** linear--obvious because

$$[A + ax_1(t) + bx_2(t)] \neq$$

$$[A + ax_1(t)] + [A + bx_2(t)]$$

- **Not** time-invariant

$$w(t) = [A + x(t - t_0)]\cos\omega_c t \neq y(t - t_0)$$

Linear and Time-Invariant (LTI) Systems

- If a continuous-time system is both linear and time-invariant, then the output $y(t)$ is related to the input $x(t)$ by a **convolution integral**

$$y(t) = \int_{-\infty}^{\infty} x(\tau)h(t - \tau)d\tau = x(t) * h(t)$$

system.

Convolution of Impulses, etc.


- Convolution of two impulses

$$\delta(t - t_1) * \delta(t - t_2) = \delta(t - t_1 - t_2)$$

- Convolution of step and shifted impulse


$$u(t) * \delta(t - t_0) = u(t - t_0)$$

Evaluating a Convolution

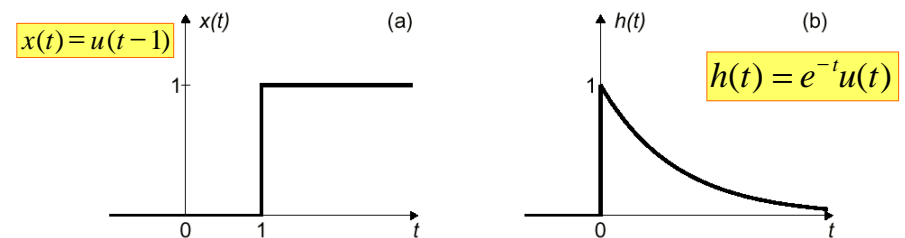


$$y(t) = \int_{-\infty}^{\infty} h(\tau)x(t - \tau)d\tau = h(t) * x(t)$$

"Flipping and Shifting"

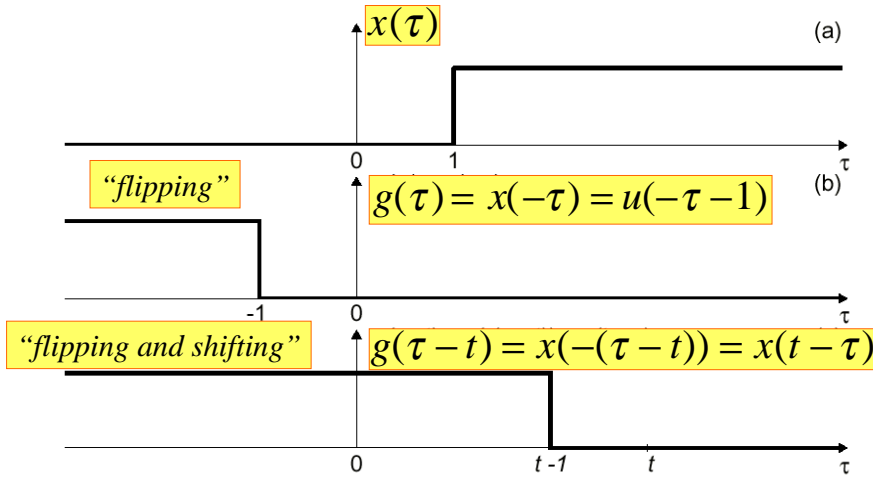


Evaluating the Integral

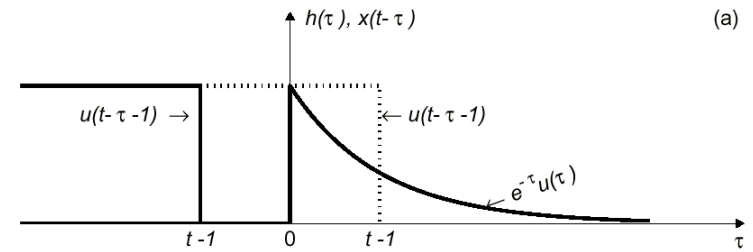


$$y(t) = \begin{cases} 0 & t-1 < 0 \\ \int_0^{t-1} e^{-\tau} d\tau & t-1 \geq 0 \end{cases}$$

Solution


$$y(t) = \int_0^{t-1} e^{-\tau} d\tau = -e^{-\tau} \Big|_0^{t-1} = 1 - e^{-(t-1)} \quad t \geq 1$$

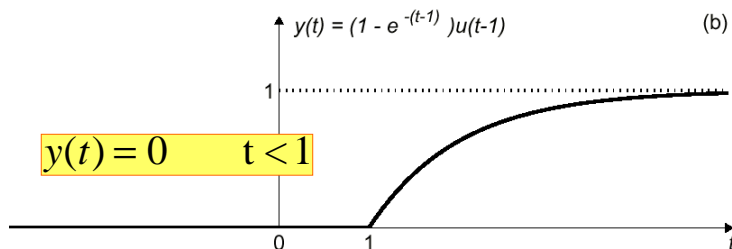

Convolution Demo

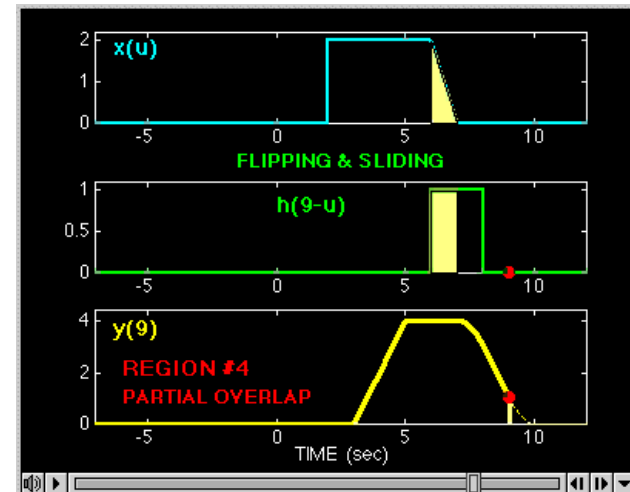


Convolution GUI

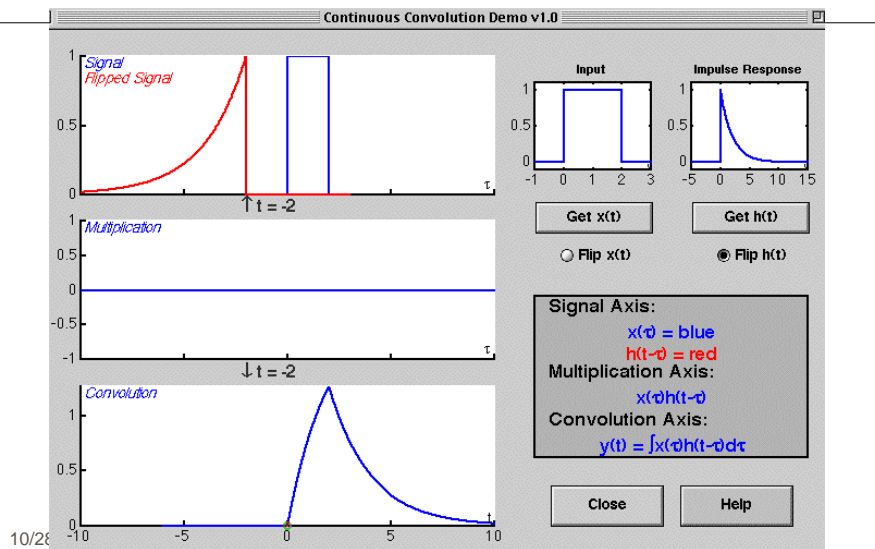

10/28/

Another Convolution Example

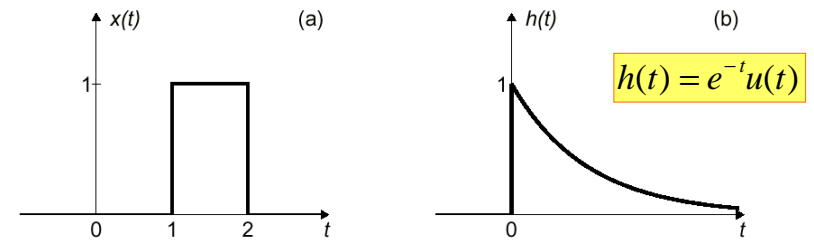


$$y(t) = \int_{-\infty}^{\infty} x(\tau)h(t-\tau)d\tau = x(t) * h(t)$$

10/28/00

ECE-2025 2000 rws/jmc

18

Evaluating the Integral

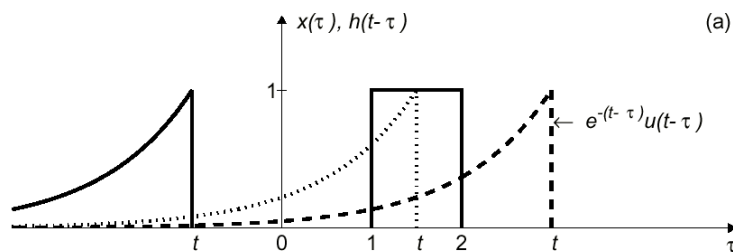

$$y(t) = \begin{cases} 0 & t < 1 \\ \int_1^t e^{-(t-\tau)} d\tau & 1 \leq t \leq 2 \\ \int_1^2 e^{-(t-\tau)} d\tau & 2 \leq t \end{cases}$$


10/28/

19

Solution

$$y(t) = \int_1^t e^{-(t-\tau)} d\tau = e^{-(t-\tau)} \Big|_1^t = 1 - e^{-(t-1)} \quad 1 \leq t \leq 2$$

$$= \int_1^2 e^{-(t-\tau)} d\tau = e^{-(t-\tau)} \Big|_1^2 = e^{-(t-2)} - e^{-(t-1)} \quad 2 \leq t$$

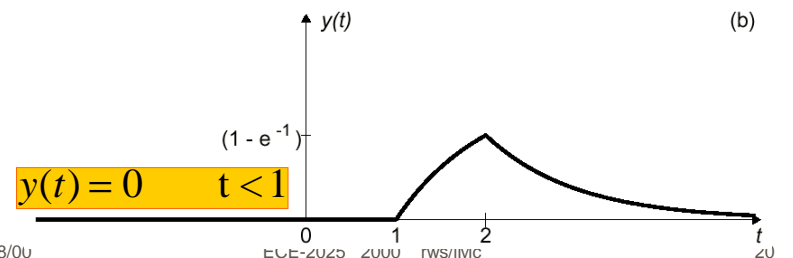

10/28/00

ECE-2025 2000 rws/jmc

20

Convolution is Commutative


$$\begin{aligned}
 h(t) * x(t) &= \int_{-\infty}^{\infty} h(\tau)x(t - \tau)d\tau \\
 &\quad \text{let } \sigma = t - \tau \text{ and } d\sigma = -d\tau \\
 h(t) * x(t) &= - \int_{\infty}^{-\infty} h(t - \sigma)x(\sigma)d\tau \\
 &= \int_{-\infty}^{\infty} h(t - \sigma)x(\sigma)d\tau = x(t) * h(t)
 \end{aligned}$$

10/28/00

ECE-2025 2000 rws/jMc

21

Cascade of LTI Systems

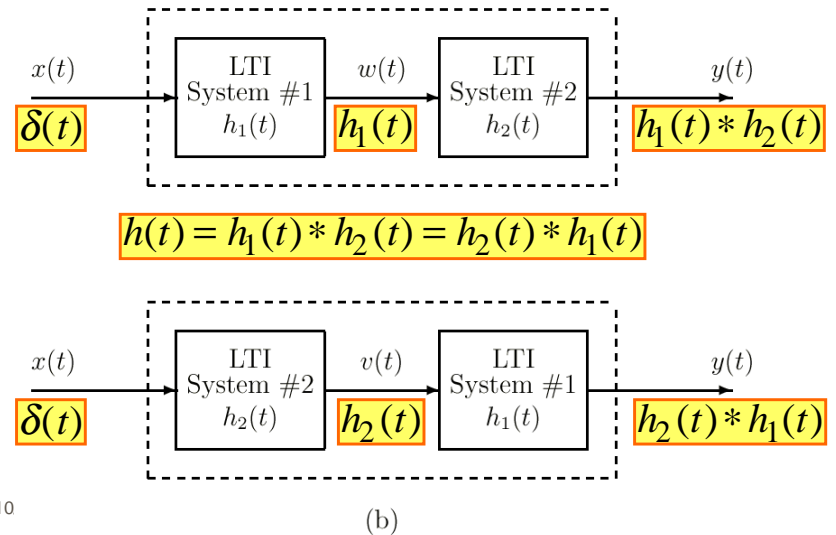

10

(b)

Stability

- A system is stable if every bounded input produces a bounded output.
- A continuous-time LTI system is stable if and only if

$$\int_{-\infty}^{\infty} |h(t)| dt < \infty$$

10/28/00

ECE-2025 2000 rws/jMc

23

Causal Systems

- A system is causal if and only if $y(t_0)$ depends only on $x(\tau)$ for $\tau \leq t_0$.
- An LTI system is causal if and only if

$$h(t) = 0 \text{ for } t < 0$$

10/28/00

ECE-2025 2000 rws/jMc

24

Convolution is Linear

- Substitute $x(t) = ax_1(t) + bx_2(t)$

$$\begin{aligned}y(t) &= \int_{-\infty}^{\infty} [ax_1(\tau) + bx_2(\tau)]h(t - \tau)d\tau \\ &= a \int_{-\infty}^{\infty} x_1(\tau)h(t - \tau)d\tau + b \int_{-\infty}^{\infty} x_2(\tau)h(t - \tau)d\tau \\ &= ay_1(t) + by_2(t)\end{aligned}$$

Therefore convolution is linear.

Convolution is Time-Invariant

- Substitute $x(t - t_0)$

$$\begin{aligned}w(t) &= \int_{-\infty}^{\infty} h(\tau)x((t - \tau) - t_0)d\tau \\ &= \int_{-\infty}^{\infty} h(\tau)x((t - t_0) - \tau)d\tau \\ &= y(t - t_0)\end{aligned}$$