

EE-2025

Fall-2000

Lecture 22

Sampling and Reconstruction

17-Nov-00

Info: Web-CT, Lab, HW

■ Calendar:

■ Quiz #3 is 20-Nov

■ One page hand-written notes

■ Calculator

■ Covers CT signals/sys, Impulses, Convolution and Fourier Transform. NOT z-Transform

■ Quiz Review: Sunday (19-Nov) @ 7 pm

■ Prob Set #10 is due this week

11/20/00

ECE-2025 Fall-00 mhh/jMc

2

Thanksgiving & beyond

■ Calendar: Final Exam(s)

■ Period 1, Monday, 11-Dec @ 8 am

■ Period 8, Wed, 13-Dec @ 11:30am

■ Reviews will be held

■ Reading Assignment: Ch 13 of Notes.

■ Prob Set #11 - due after Holiday

■ Lab #11 due week of 27-Nov

■ Lab #12 due last week (4—7 Dec)

■ ALL Labs must be turned in by 8-Dec-00

Pop Quiz

$$e^{-2t}u(t) * \delta(t+1) = ?$$

$$(e^{-2t}u(t))\delta(t+1) = ?$$

$$\int_{-\infty}^{\infty} (e^{-2t}u(t))\delta(t-1)dt = ?$$

11/20/00

ECE-2025 Fall-00 mhh/jMc

3

11/20/00

ECE-2025 Fall-00 mhh/jMc

4


Lecture 22

Sampling and Reconstruction
(Fourier View)

LECTURE OBJECTIVES

- Sampling Theorem Revisited
 - GENERAL: in the FREQUENCY DOMAIN
 - Fourier transform of sampled signal
 - Reconstruction from samples
- Review of FT properties
 - Convolution <--> multiplication
 - Frequency shifting
 - Review of AM


Amplitude Modulator

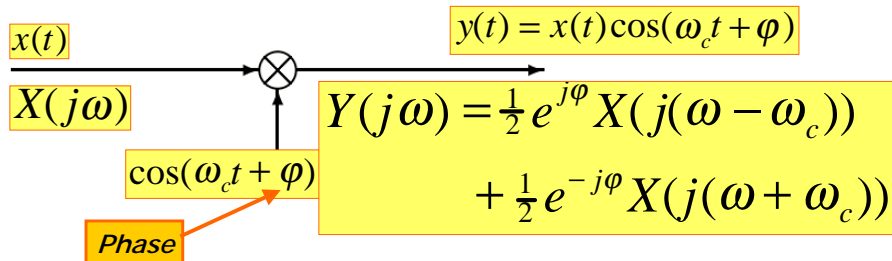


- $x(t)$ modulates the amplitude of the cosine wave. The result in the frequency-domain is two SHIFTED copies of $X(j\omega)$.

Double Sideband AM
(Time-Domain)

- In the time-domain, the envelope of sinewave peaks follows $|x(t)|$

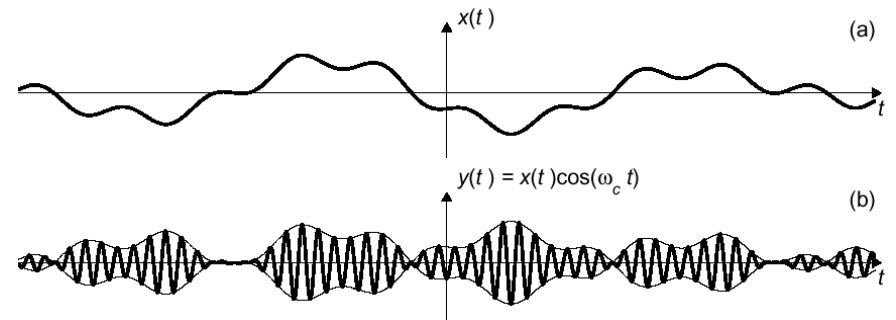


DSBAM: Frequency-Domain

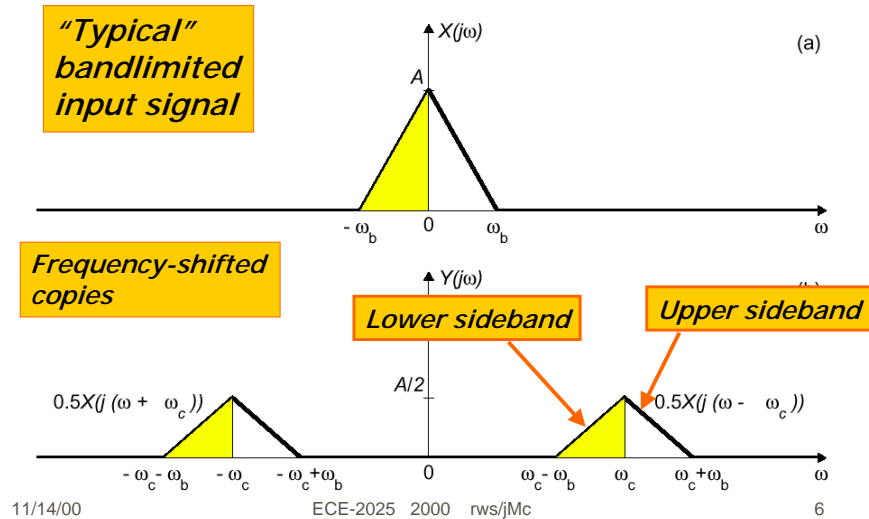


Ideal C-to-D Converter

- Mathematical Model for A-to-D

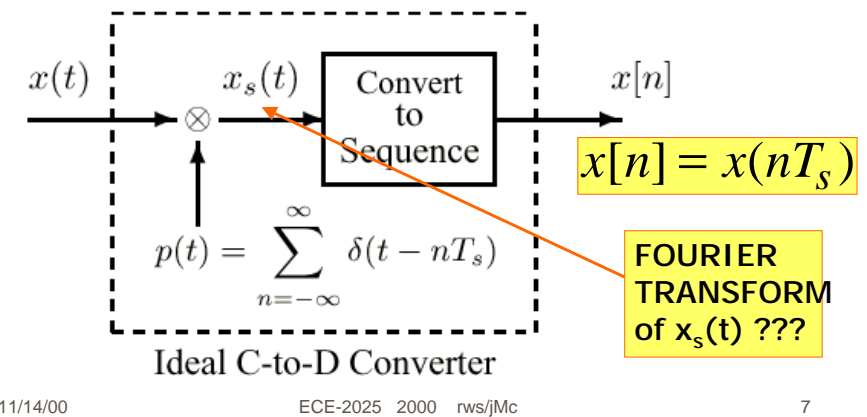

Periodic Impulse Train

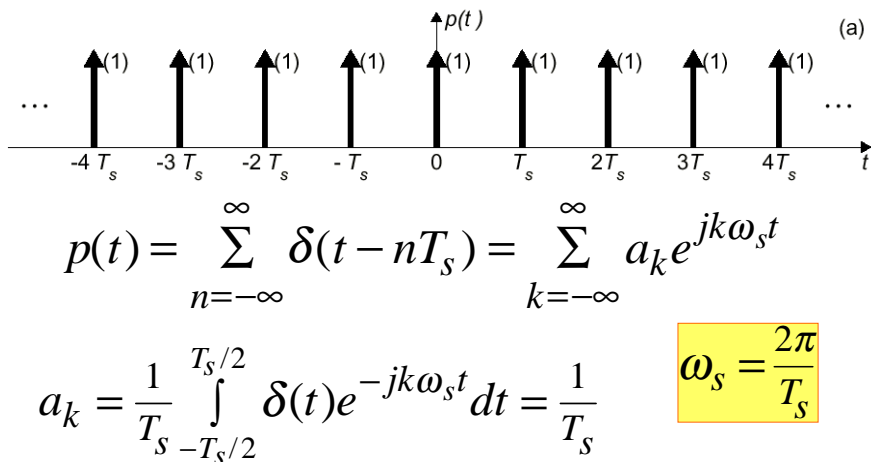

Impulse Train Sampling



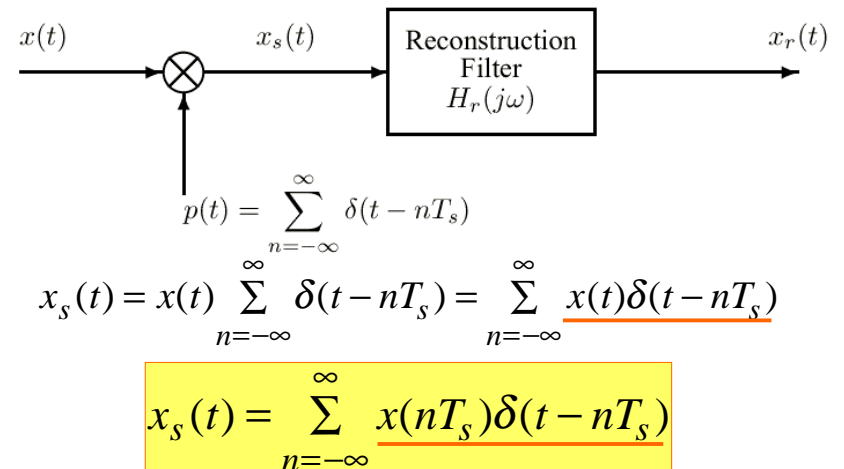


Illustration of Sampling

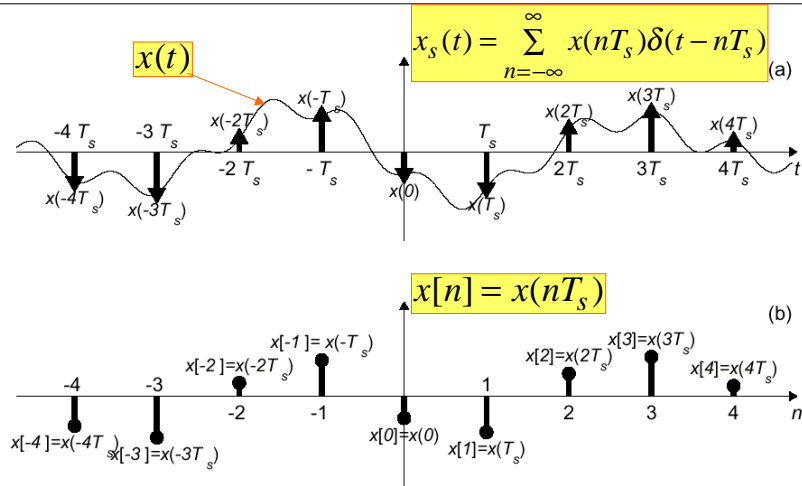

Sampling: Freq. Domain

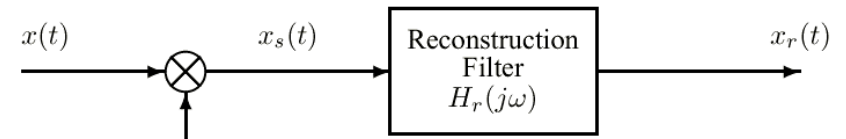

$$p(t) = \sum_{k=-\infty}^{\infty} a_k e^{jk\omega_s t}$$

**EXPECT
FREQUENCY
SHIFTING !!!**

$$p(t) = \sum_{n=-\infty}^{\infty} \delta(t - nT_s) = \sum_{k=-\infty}^{\infty} a_k e^{jk\omega_s t}$$

Frequency-Domain Analysis


$$x_s(t) = x(t) \sum_{n=-\infty}^{\infty} \delta(t - nT_s) = \sum_{n=-\infty}^{\infty} x(nT_s)\delta(t - nT_s)$$

$$x_s(t) = x(t) \sum_{k=-\infty}^{\infty} \frac{1}{T_s} e^{jk\omega_s t} = \frac{1}{T_s} \sum_{k=-\infty}^{\infty} x(t) e^{jk\omega_s t}$$


$$X_s(j\omega) = \frac{1}{T_s} \sum_{k=-\infty}^{\infty} X(j(\omega - k\omega_s))$$

$$\omega_s = \frac{2\pi}{T_s}$$

Frequency-Domain Representation of Sampling

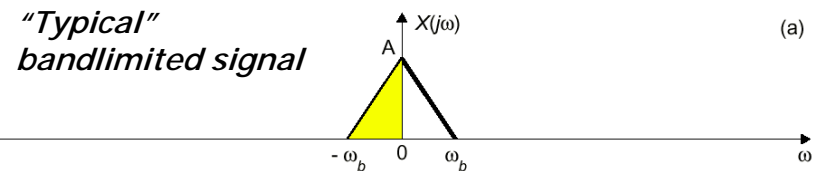


$$X_s(j\omega) = \frac{1}{T_s} \sum_{k=-\infty}^{\infty} X(j(\omega - k\omega_s))$$

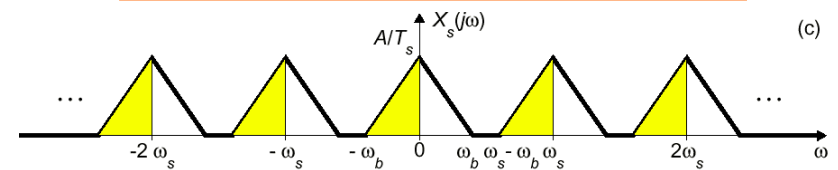


Aliasing Distortion

- If $\omega_s < 2\omega_b$, the copies of $X(j\omega)$ overlap, and we have **aliasing distortion**.

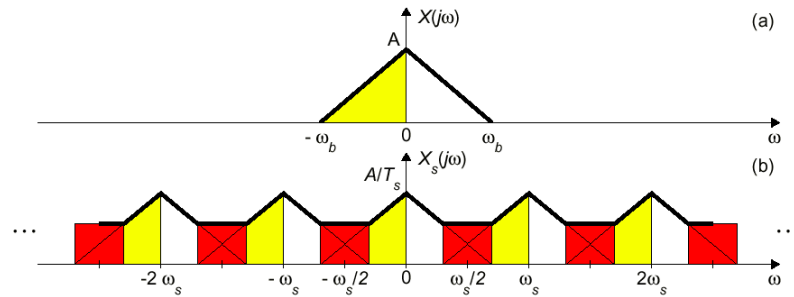

Reconstruction of $x(t)$

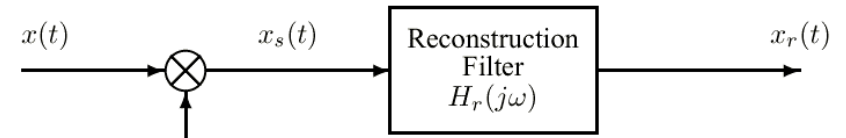


$$x_s(t) = \sum_{n=-\infty}^{\infty} x(nT_s)\delta(t - nT_s)$$

$$X_s(j\omega) = \frac{1}{T_s} \sum_{k=-\infty}^{\infty} X(j(\omega - k\omega_s))$$



$$X_r(j\omega) = H_r(j\omega)X_s(j\omega)$$

Reconstruction in the Frequency-Domain

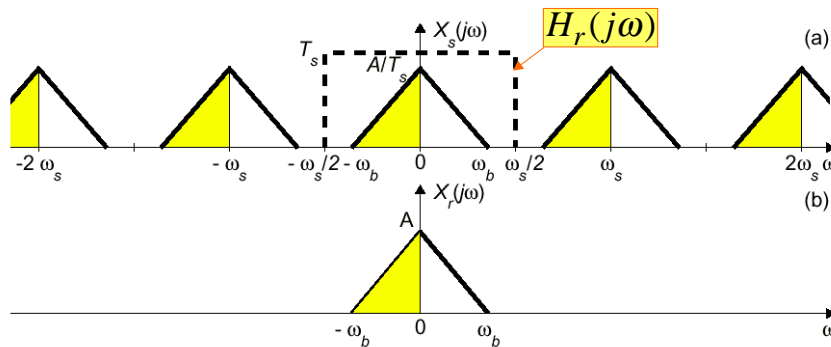

- If $\omega_s > 2\omega_b$, the copies of $X(j\omega)$ do not overlap, so $X_r(j\omega) = H_r(j\omega)X_s(j\omega)$.

Ideal Reconstruction Filter

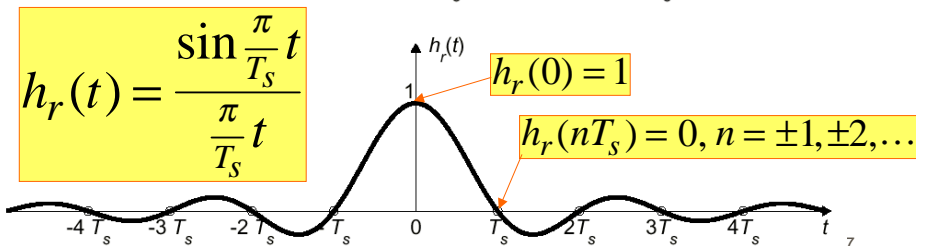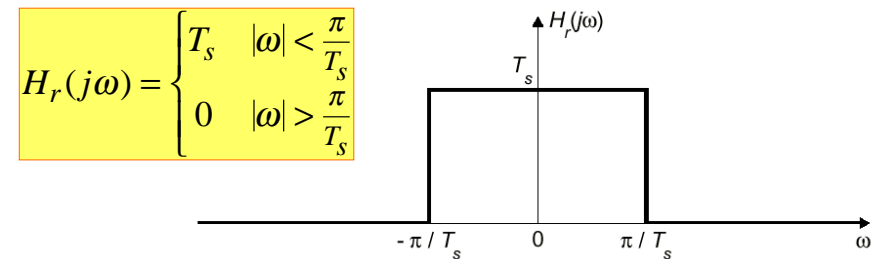

Signal Reconstruction

$$x_r(t) = h_r(t) * x_s(t) = h_r(t) * \sum_{n=-\infty}^{\infty} x(nT_s) \delta(t - nT_s)$$

$$x_r(t) = \sum_{n=-\infty}^{\infty} x(nT_s) h_r(t - nT_s)$$

$$x_r(t) = \sum_{n=-\infty}^{\infty} x(nT_s) \frac{\sin \frac{\pi}{T_s} (t - nT_s)}{\frac{\pi}{T_s} (t - nT_s)}$$

Ideal bandlimited interpolation formula

Shannon Sampling Theorem


■ **"SINC" Interpolation** is the ideal

- PERFECT RECONSTRUCTION
- of BANDLIMITED SIGNALS


A signal $x(t)$ with bandlimited Fourier transform such that $X(j\omega) = 0$ for $|\omega| \geq \omega_b$ can be reconstructed exactly from samples taken with sampling rate $\omega_s = 2\pi/T_s \geq 2\omega_b$ using the following bandlimited interpolation formula:

$$x_r(t) = \sum_{n=-\infty}^{\infty} x(nT_s) \frac{\sin \left[\frac{\pi}{T_s} (t - nT_s) \right]}{\frac{\pi}{T_s} (t - nT_s)}$$

Reconstruction in Time-Domain

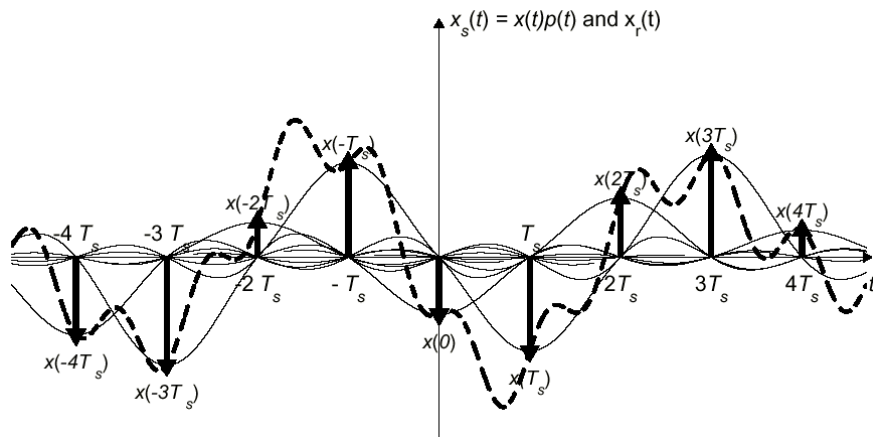

Ideal C-to-D and D-to-C

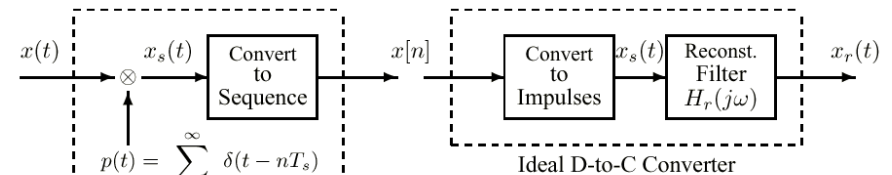

$$x[n] = x(nT_s)$$

Ideal Sampler

$$x_r(t) = \sum_{n=-\infty}^{\infty} x[n] \frac{\sin \frac{\pi}{T_s} (t - nT_s)}{\frac{\pi}{T_s} (t - nT_s)}$$

Ideal bandlimited interpolator

$$X_s(j\omega) = \frac{1}{T_s} \sum_{k=-\infty}^{\infty} X(j(\omega - k\omega_s))$$

$$X_r(j\omega) = H_r(j\omega) X_s(j\omega)$$