

EE-2200

Spring-99

LECTURE #3

Phasor Addition Theorem

9-April-99

Web-CT Info

- Check the Bulletin Board for msgs
 - MAKE YOUR OWN POSTINGS
- Lectures are being posted
 - PDF format (4 per page)
- Quiz Dates:
 - Quiz #1 on 26-April (Monday)
 - Quiz #2 on 24-May (Monday)

4/10/99

EE-2200 Spring-99 jMc

2

Homework Info

- Prob Set #1 due **TODAY in CLASS**
- HW will be posted on Friday/Saturday
 - Due the following Friday
 - HW #2 will be on the web site soon
- Solutions will be posted on Weekend
 - HW #1 should be there soon

4/10/99

EE-2200 Spring-99 jMc

3

Lab Info

- **LAB QUIZ** next week (short)
- MATLAB Help: Wed 6PM VL-456
- Lab #1 Report
 - Turn in during your lab time
 - Write-up sections 2 and 3
 - Include INSTRUCTOR VERIFICATION
- Lab #2 will be posted Monday

4/10/99

EE-2200 Spring-99 jMc

4

READING ASSIGNMENTS

This Lecture:

- Chapter 2, pp. 31–43

Other Reading:


- Appendix A: Complex Numbers
- Appendix B: MATLAB
- Next Lecture: start Chapter 3

4/10/99

EE-2200 Spring-99 jMc

5

Z DRILL (Complex Arith)

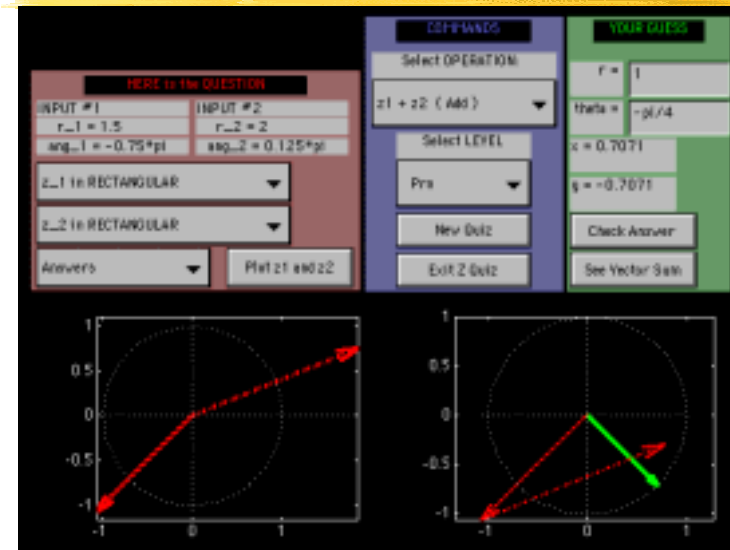

4/10/99

EE-2200 Spring-99 jMc

6

LECTURE OBJECTIVES

- Phasors = Complex Amplitude
 - Add Sinusoids = Complex Addition
 - PHASOR ADDITION THEOREM

$$z(t) = Ze^{j\omega t} = (Ae^{j\phi})e^{j\omega t}$$

Develop the ABSTRACTION:

- Complex Numbers **represent** Sinusoids

4/10/99

EE-2200 Spring-99 jMc

7

AVOID Trigonometry

- Algebra, even complex, is **EASIER !!!**
- Can you recall $\cos(\theta_1 + \theta_2)$?
- Use the real part of $e^{j\theta_1} e^{j\theta_2}$

$$e^{j(\theta_1 + \theta_2)} = e^{j\theta_1} e^{j\theta_2}$$

$$= (\cos \theta_1 + j \sin \theta_1)(\cos \theta_2 + j \sin \theta_2)$$

$$= \cos \theta_1 \cos \theta_2 - \sin \theta_1 \sin \theta_2 + j(\dots)$$

4/10/99


EE-2200 Spring-99 jMc

8

Euler's FORMULA

Complex Exponential



- Real part is cosine
- Imaginary part is sine
- Magnitude is one



$$e^{j\theta} = \cos(\theta) + j \sin(\theta)$$

$$e^{j\omega t} = \cos(\omega t) + j \sin(\omega t)$$

Real & Imaginary Part Plots

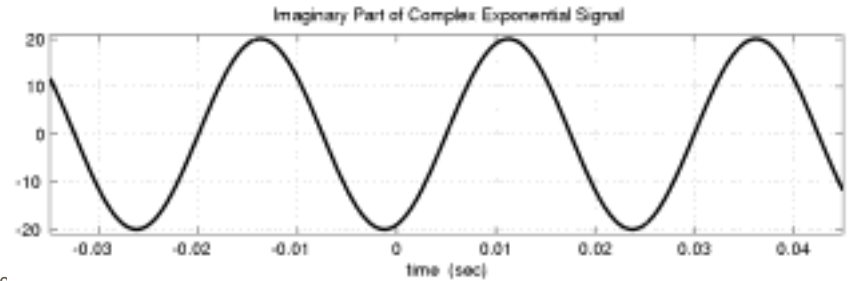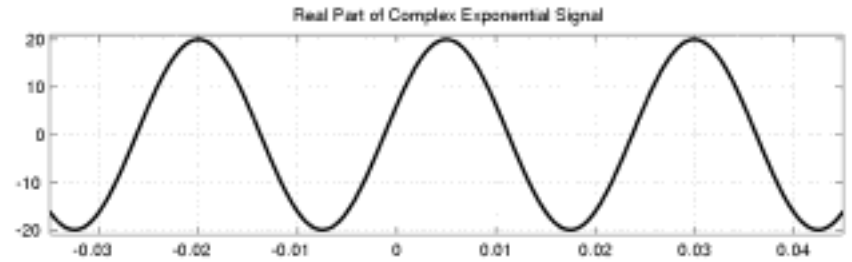


COMPLEX EXPONENTIAL

$$e^{j\omega t} = \cos(\omega t) + j \sin(\omega t)$$

Rotating Vector



- Angle changes vs. time
- $\theta = \omega t$
- ex: $\omega = 10\pi$
- Rotates 0.1π in 0.01 secs



$$e^{j\theta} = \cos(\theta) + j \sin(\theta)$$

Rotating Phasor

See Demo on CD-ROM
Chapter 2

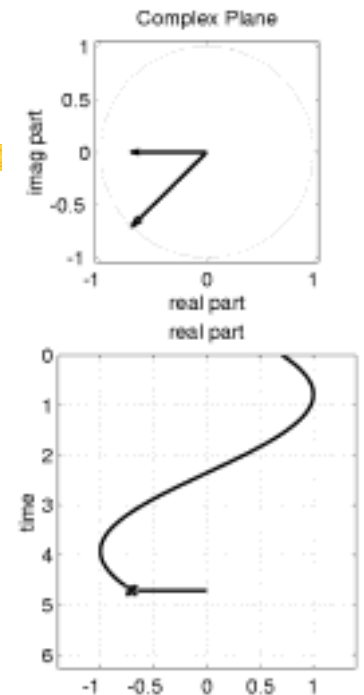

Cos = REAL PART

- Real Part of Euler's:

$$\cos(\omega t) = \Re\{e^{j\omega t}\}$$

- General Sinusoid

$$x(t) = A \cos(\omega t + \varphi)$$

- So,

$$\begin{aligned} A \cos(\omega t + \varphi) &= \Re\{Ae^{j(\omega t + \varphi)}\} \\ &= \Re\{Ae^{j\varphi} e^{j\omega t}\} \end{aligned}$$

4/10/99

EE-2200 Spring-99

13

COMPLEX AMPLITUDE

- General Sinusoid

$$x(t) = A \cos(\omega t + \varphi) = \Re\{Ae^{j\varphi} e^{j\omega t}\}$$

- Complex Exponential

$$z(t) = Ze^{j\omega t}$$

$$Z = Ae^{j\varphi}$$

- Sinusoid is REAL PART of $e^{j\omega t}$

$$x(t) = \Re\{z(t)\} = \Re\{Ze^{j\omega t}\}$$

4/10/99

EE-2200 Spring-99 jMc

14

WANT to ADD SINUSOIDS

- ALL SINUSOIDS HAVE SAME FREQUENCY
- HOW to GET {Amp,Phase} of RESULT?

$$x_1(t) = 1.7 \cos(2\pi(10)t + 70\pi/180)$$

$$x_2(t) = 1.9 \cos(2\pi(10)t + 200\pi/180)$$

$$\begin{aligned} x_3(t) &= x_1(t) + x_2(t) \\ &= 1.532 \cos(2\pi(10)t + 141.79\pi/180) \end{aligned}$$


4/10/99

EE-2200 Spring-99 jMc

15

ADD SINUSOIDS

- Sum Sinusoid has same Frequency

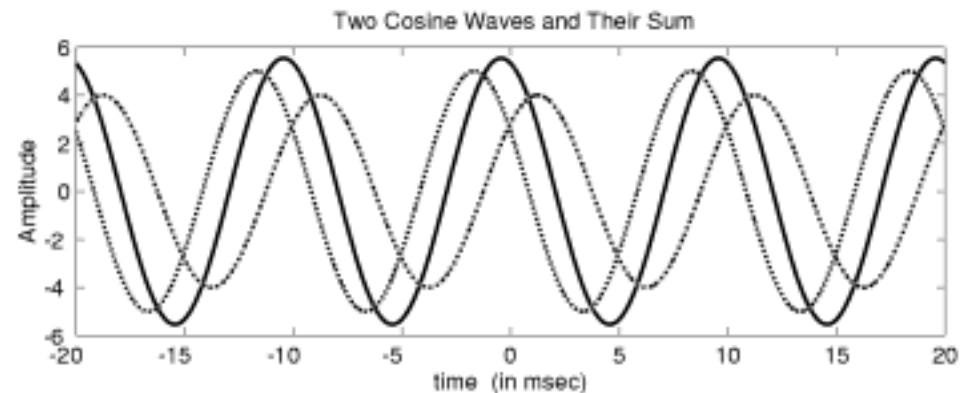

4/10/99

EE-2200 Spring-99 jMc

16

PHASOR ADDITION RULE

$$x(t) = \sum_{k=1}^N A_k \cos(\omega_0 t + \phi_k)$$

$$= A \cos(\omega_0 t + \phi)$$

Get the new complex amplitude by addition

$$\sum_{k=1}^N A_k e^{j\phi_k} = A e^{j\phi}$$

4/10/99

EE-2200 Spring-99 jMc

17

Phasor Addition Proof

$$\sum_{k=1}^N A_k \cos(\omega_0 t + \phi_k) = \sum_{k=1}^N \Re \{ A_k e^{j(\omega_0 t + \phi_k)} \}$$

$$= \Re \left\{ \sum_{k=1}^N A_k e^{j\phi_k} e^{j\omega_0 t} \right\}$$

$$= \Re \left\{ \left(\sum_{k=1}^N A_k e^{j\phi_k} \right) e^{j\omega_0 t} \right\}$$


$$= \Re \{ (A e^{j\phi}) e^{j\omega_0 t} \} = A \cos(\omega_0 t + \phi)$$

4/10/99

EE-2200 Spring-99 jMc

18

ADD SINUSOIDS EXAMPLE

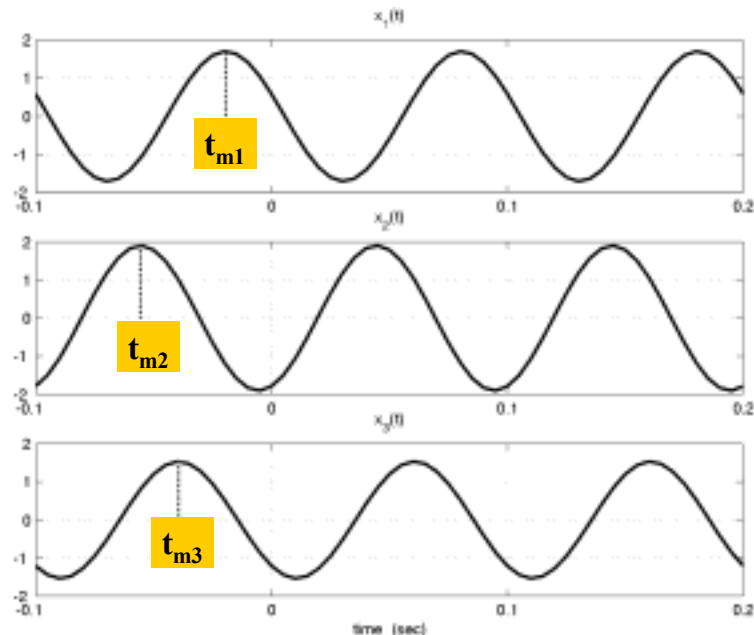

4/10/99

EE-2200 Spring-99 jMc

19

Convert Time-Shift to Phase

- Measure **peak times**:
 - $t_{m1} = -0.0194$, $t_{m2} = -0.0556$, $t_{m3} = -0.0394$
- Convert to **phase** ($T=0.1$)
 - $\phi_1 = -2\pi(t_{m1}/T) = 70\pi/180$,
 - $\phi_2 = 200\pi/180$
- **Amplitudes**
 - $A_1 = 1.7$, $A_2 = 1.9$, $A_3 = 1.532$

4/10/99

EE-2200 Spring-99 jMc

20


Phasor Add: Numerical

Convert Polar to Cartesian

- $X_1 = 0.5814 + j1.597$

- $X_2 = -1.785 - j0.6498$

- $X_3 = -1.204 + j0.9476$

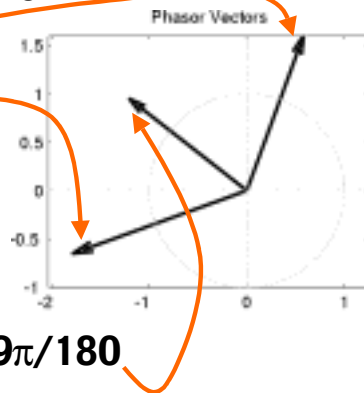

Convert back to Polar

- $X_3 = 1.532$ at angle $141.79\pi/180$

4/10/99

EE-2200 Spring-99 jMc

21


ADD SINUSOIDS

$$x_1(t) = 1.7 \cos(2\pi(10)t + 70\pi/180)$$

$$x_2(t) = 1.9 \cos(2\pi(10)t + 200\pi/180)$$

$$x_3(t) = x_1(t) + x_2(t)$$

$$= 1.532 \cos(2\pi(10)t + 141.79\pi/180)$$

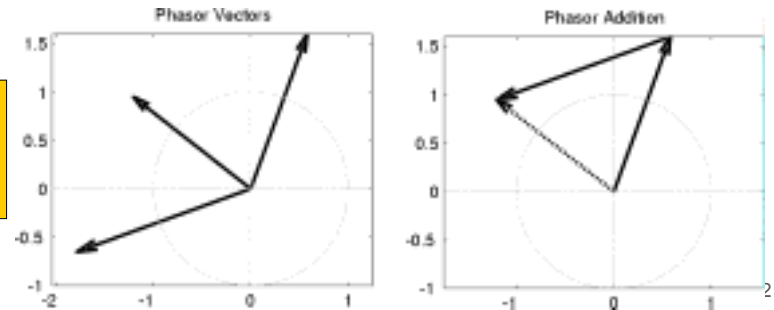

4/10/99

POP QUIZ

ADD THESE 2 SINUSOIDS:

$$x_1(t) = \cos(77\pi t)$$

$$x_2(t) = \sqrt{3} \cos(77\pi t + 0.5\pi)$$

COMPLEX ADDITION:

$$1 + \sqrt{3}e^{j0.5\pi}$$

4/10/99


EE-2200 Spring-99 jMc

23

POP QUIZ (answer)

COMPLEX ADDITION:

$$1 + j\sqrt{3} = 2e^{j\pi/3}$$

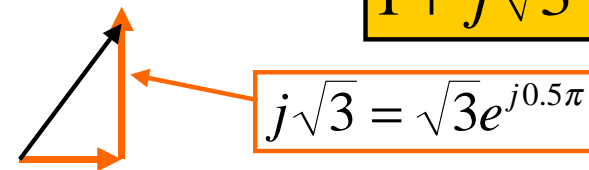

CONVERT back to cosine form:

$$x_3(t) = 2 \cos(77\pi t + \frac{\pi}{3})$$

4/10/99

EE-2200 Spring-99 jMc

24