

EE-2200

Spring-99

Lecture 4

Spectrum Representation

12-April-99

Web-CT Info

- **Bulletin Board has all OFFICIAL msgs**
- **Lectures are being posted**
 - **PDF format (4 per page)**
- **Calendar has entries:**
 - **Quiz #1 on 26-April (Monday)**
 - **Quiz #2 on 24-May (Monday)**

4/10/99

EE-2200 Spring-99 jMc

2

Homework & Lab Info

- **Prob Set #2 due FRIDAY**
 - **In Lecture, before NOON**
- **HW #1 Solutions were posted last Friday.**
- **Lab #2 Report**
 - **Turn in during your lab time**
 - **Include INSTRUCTOR VERIFICATION**

4/10/99

EE-2200 Spring-99 jMc

3

READING ASSIGNMENTS

- **This Lecture:**
 - **Chapter 3, pp. 48-61**
- **Other Reading:**
 - **Appendix A: Complex Numbers**
 - **Appendix B: MATLAB**
 - **Next Lecture: Chapter 3**

4/10/99

EE-2200 Spring-99 jMc

4

HISTORY

- What company's first successful product was a sine-wave generator?
 - Variable frequency
 - Lab Instrument

LECTURE OBJECTIVES

- Sinusoids with **DIFFERENT** Frequencies
 - Add Sinusoids
- $$x(t) = \sum_{k=1}^N A_k \cos(2\pi f_k t + \phi_k)$$
- ↑
- SPECTRUM** Representation
 - Graphical** Form shows Different Freqs

FREQUENCY DIAGRAM

- Plot Complex Amplitude vs. Freq

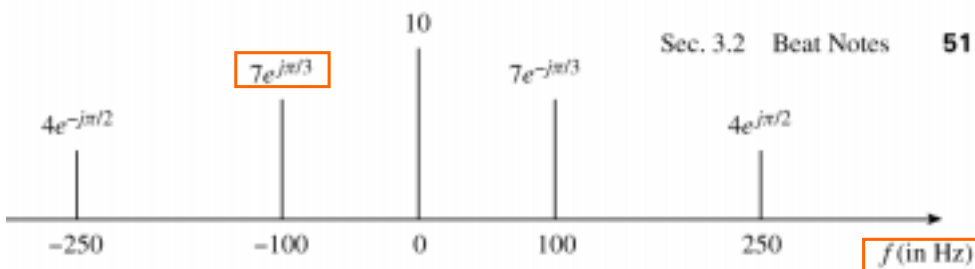


Figure 3.1 Spectrum of the signal $x(t) = 10 + 14 \cos(200\pi t - \pi/3) + 8 \cos(500\pi t + \pi/2)$. Positive and negative frequency components must be included even though the negative-frequency ones are the conjugate of the positive-frequency components.

Another FREQ. Diagram



Figure 3.18 Sheet-music notation is a time-frequency diagram.

Time is the horizontal axis

Frequency is the vertical axis

MOTIVATION

■ Synthesize **Complicated** Signals

■ Musical Notes

- Piano uses 3 strings for many notes
- Chords: play several notes simultaneously

■ Human Speech

- Vowels have dominant frequencies 
- Application: computer generated speech


■ Can **all** signals be generated this way?

4/10/99

EE-2200 Spring-99 jMc

9

Fur Elise WAVEFORM

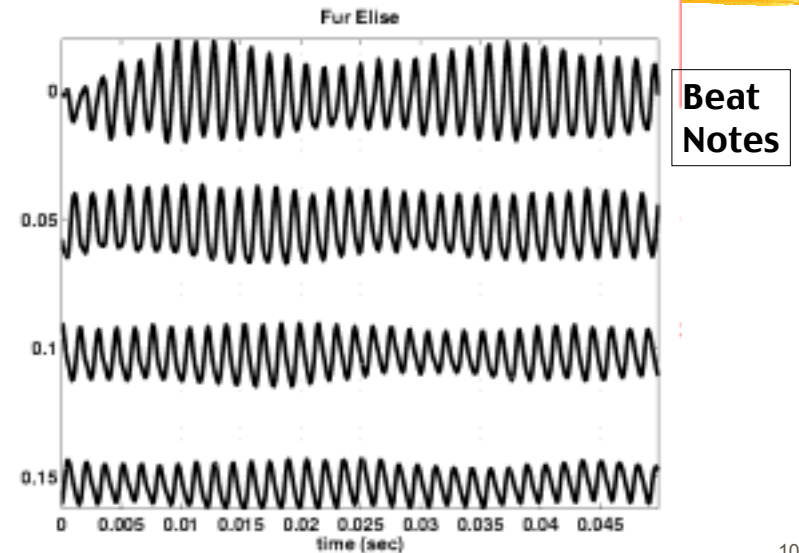


4/10/99

10

Speech Signal: BAT

■ Nearly Periodic in Vowel Region

- Period is (Approximately) $T = 0.0065$ sec

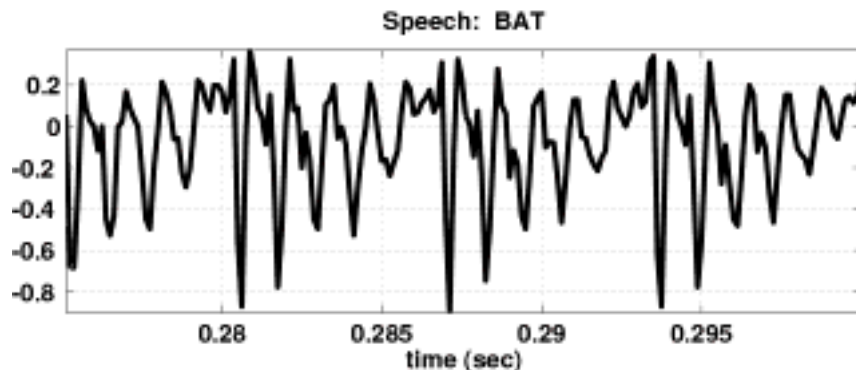

4/10/99


EE-2200 Spring-99 jMc

11

Euler's FORMULA

■ Complex Exponential

- Real part is cosine
- Imaginary part is sine
- Magnitude is one



$$e^{j\theta} = \cos(\theta) + j \sin(\theta)$$

$$e^{j\omega t} = \cos(\omega t) + j \sin(\omega t)$$

4/10/99

EE-2200 Spring-99 jMc

12

INVERSE Euler's Formula

- Solve for **cosine** (or sine)

$$e^{j\omega t} = \cos(\omega t) + j \sin(\omega t)$$

$$e^{-j\omega t} = \cos(-\omega t) + j \sin(-\omega t)$$

$$e^{-j\omega t} = \cos(\omega t) - j \sin(\omega t)$$

$$e^{j\omega t} + e^{-j\omega t} = 2 \cos(\omega t)$$

$$\cos(\omega t) = \frac{1}{2}(e^{j\omega t} + e^{-j\omega t})$$

4/10/99

EE-2200 Spring-99 jMc

13

INVERSE Euler's Formula

- Solve for **cosine** (or sine)

$$\cos(\omega t) = \frac{1}{2}(e^{j\omega t} + e^{-j\omega t})$$

$$\sin(\omega t) = \frac{1}{2j}(e^{j\omega t} - e^{-j\omega t})$$

4/10/99

EE-2200 Spring-99 jMc

14

SPECTRUM Interpretation

- Cosine = sum of 2 complex exponentials:

$$A \cos(7t) = \frac{A}{2} e^{j7t} + \frac{A}{2} e^{-j7t}$$

- One has a positive frequency
- The other has **negative** freq.
- Amplitude of each is half as big

4/10/99

EE-2200 Spring-99 jMc

15

SPECTRUM of SINE

- Sine = sum of 2 complex exponentials:

$$\begin{aligned} A \sin(7t) &= \frac{A}{2j} e^{j7t} - \frac{A}{2j} e^{-j7t} \\ &= \frac{1}{2} A e^{-j0.5\pi} e^{j7t} + \frac{1}{2} A e^{j0.5\pi} e^{-j7t} \end{aligned}$$

$$\frac{-1}{j} = j = e^{j0.5\pi}$$

- Positive freq has phase = -0.5π
- Negative freq. has phase = $+0.5\pi$


4/10/99

EE-2200 Spring-99 jMc

16

GRAPHICAL SPECTRUM

EXAMPLE of SINE

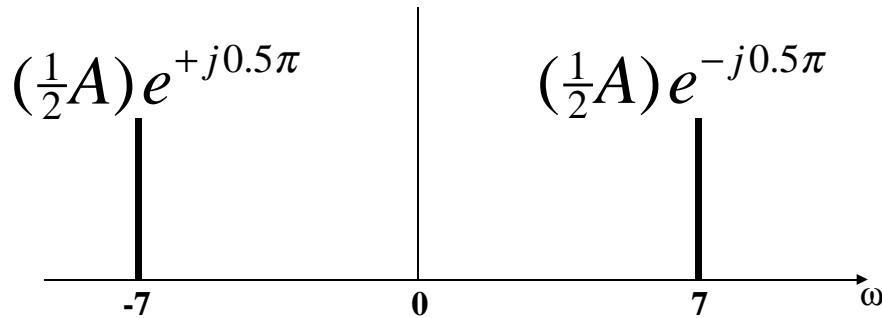


AMPLITUDE, PHASE & FREQUENCY are shown

NEGATIVE FREQUENCY

- Is negative frequency real?
- Doppler Radar provides an example
 - Police radar measures speed by using the Doppler shift principle
 - Let's assume 400Hz <----> 60 mph
 - +400Hz means towards the radar
 - -400Hz means away (opposite direction)
 - Think of a train whistle

SPECTRUM ---> SINUSOID

- Add the spectrum components:

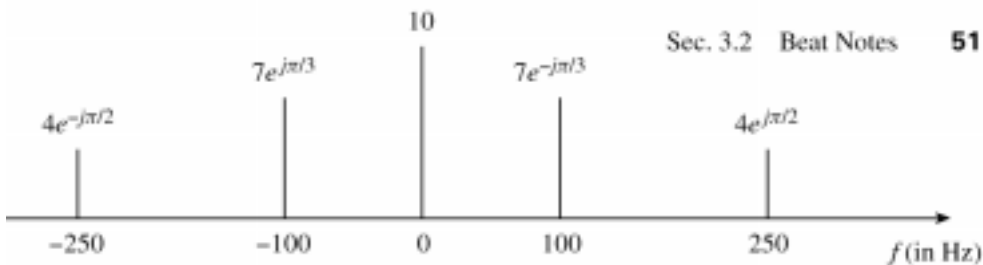

Sec. 3.2 Beat Notes 51

What is the formula for the signal $x(t)$?

Gather (A, ω, ϕ) information

- | Frequencies: | Amplitude & Phase |
|--------------|-------------------|
| ■ -250 Hz | ■ 4 $-\pi/2$ |
| ■ -100 Hz | ■ 7 $+\pi/3$ |
| ■ 0 Hz | ■ 10 0 |
| ■ 100 Hz | ■ 7 $-\pi/3$ |
| ■ 250 Hz | ■ 4 $+\pi/2$ |

Note the conjugate phase

Zero freq always has zero phase (for real $x(t)$)

DC is another name for zero-freq component

Add All the Spectrum Components

$$x(t) = 10 + 7e^{-j\pi/3}e^{j2\pi(100)t} + 7e^{j\pi/3}e^{-j2\pi(100)t} + 4e^{j\pi/2}e^{j2\pi(250)t} + 4e^{-j\pi/2}e^{-j2\pi(250)t}$$

Use Euler's Formula to get **REAL** sinusoids:

$$A \cos(\omega t + \varphi) = \frac{A}{2} e^{j\varphi} e^{j\omega t} + \frac{A}{2} e^{-j\varphi} e^{-j\omega t}$$

4/10/99


EE-2200 Spring-99 jMc

21

FINAL ANSWER

$$x(t) = 10 + 14 \cos(200\pi t - \pi/3) + 8 \cos(500\pi t + \pi/2)$$

So, we get the general form:

$$x(t) = \sum_{k=1}^N A_k \cos(2\pi f_k t + \varphi_k)$$


4/10/99

EE-2200 Spring-99 jMc

22

Summary: GENERAL FORM

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi f_k t + \phi_k)$$

$$x(t) = X_0 + \sum_{k=1}^N \Re \{ X_k e^{j2\pi f_k t} \}$$

$$X_k = A_k e^{j\phi_k}$$

frequency is f_k .

$$x(t) = X_0 + \sum_{k=1}^N \left\{ \frac{X_k}{2} e^{j2\pi f_k t} + \frac{X_k^*}{2} e^{-j2\pi f_k t} \right\}$$

4/10/

23

Example: Synthetic Vowel

Sum of 5 Frequency Components

f_k (Hz)	X_k	Mag	Phase (rad)
200	$(771 + j12202)$	12,226	1.508
400	$(-8865 + j28048)$	29,416	1.876
500	$(48001 - j8995)$	48,836	-0.185
1600	$(1657 - j13520)$	13,621	-1.449
1700	$4723 + j0$	4723	0

Table 3.1: Complex amplitudes for harmonic signal that approximates the vowel sound "ah".


4/10/99

EE-2200 Spring-99 jMc

24

SPECTRUM of VOWEL

- Note: Spectrum has $0.5X_k$ (except X_{DC})
- Conjugates in negative frequency

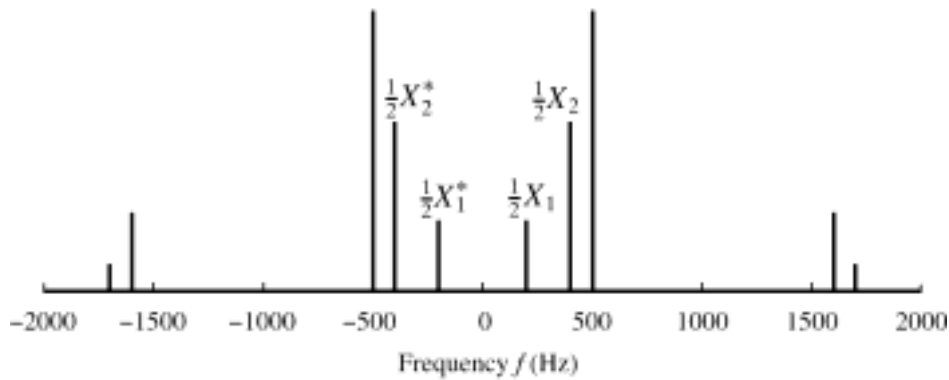


4/10/99

EE-2200 Spring-99 jMc

25

SPECTRUM of VOWEL (Polar Format)

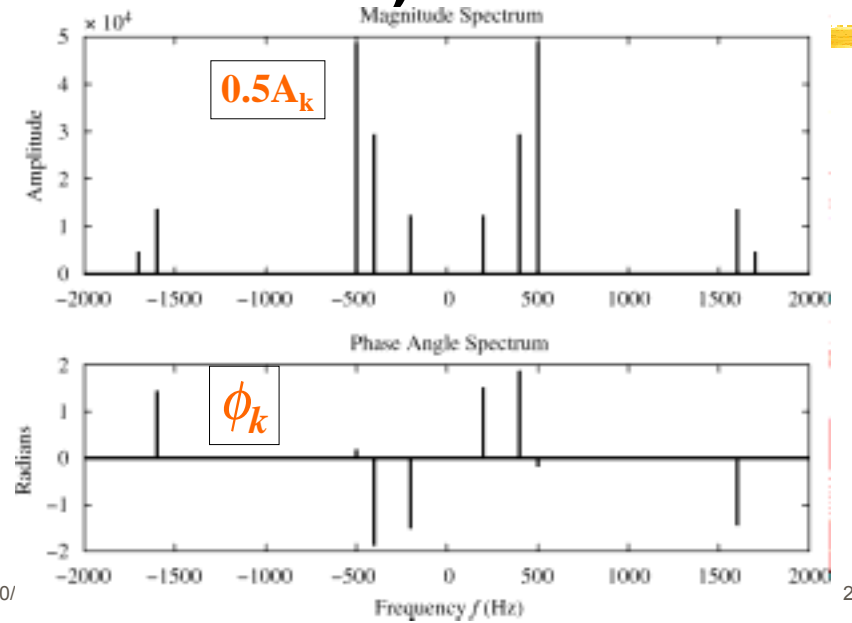

4/10/

26

Vowel Waveform (sum of all 5 components)

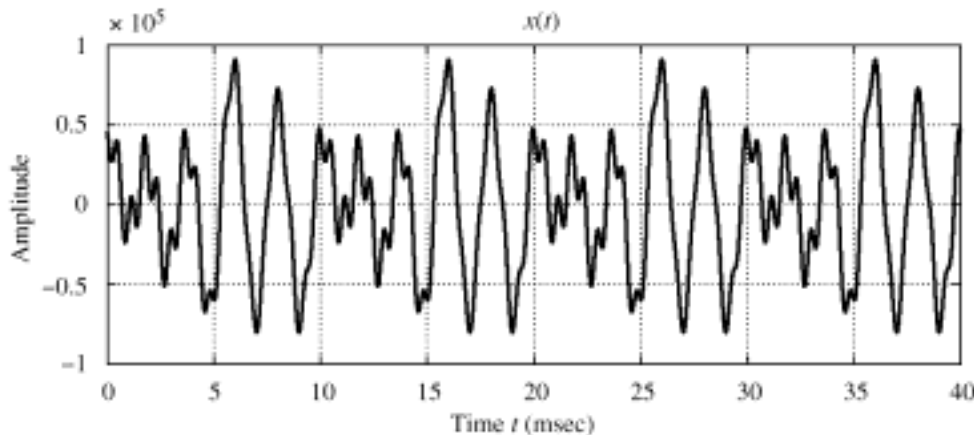


Figure 3.11 Sum of all of the terms in (3.3.4). Note that the period is 10 msec, which equals $1/f_0$.

4/10/99

EE-2200 Spring-99 jMc

27