

**EE-2025**

**Fall-2003**

**Lecture 4  
Spectrum Representation  
29-Aug-03**

---

**Web-CT Info**

- Bulletin Board has all **OFFICIAL** msgs
- Lectures are being posted
  - PDF format (4 per page)
- Upcoming Events:
  - Quiz #1 on on 19-Sept (Friday)
- Aftermath of WebCT crash on Tuesday:
  - Last chance: Make-up PreLab #1 for Sections L02 and L04 on Friday from 2:00—3:30 in BH-216

8/31/2003

ECE-2025 Fall-2003 jMc

2

---

**Lab Info**

- Lab #1 Report
  - Turn in at beginning of your lab time
  - **Ask your grading TA about format**
- Lab #2 will be posted later today
  - Monday sections start Lab #2 on 8-Sept
- Pre-Post-Lab Questions will get harder !!!
  - Also cover previous Lab
- Finish Instructor Verification in Lab
- Computer Problems?  
[help@ece.gatech.edu](mailto:help@ece.gatech.edu)

---

**Homework Info**

- Written HW #2 due NEXT WEEK
  - In Recitation, at the beginning
  - Monday Rec (L13)...turn in HW at Lab on Wed.
- HW #1 Solutions have been posted
- Format your HW (see guidelines)
- HW, Lab and MATLAB Help:
  - Mon Noon Bunger-Henry 216
  - Mon 6:15pm VanLeer 261
  - Tues 7pm VanLeer 261
  - Wed 6pm VanLeer 261

8/31/2003

ECE-2025 Fall-2003 jMc

3

8/31/2003

ECE-2025 Fall-2003 jMc

4

## PRINTING QUOTA

---

- ECE Labs have printers, but...
- Limit your printing to essentials
  - Your account has a quota
- 10 pages/week
  - 2000 students
  - 3 courses/student
  - 15 weeks/semester
  - 900,000 pages !

8/31/2003

ECE-2025 Fall-2003 jMc

5

## James THURBER

---

- It is better to know some of the questions than all of the answers

8/31/2003

ECE-2025 Fall-2003 jMc

6

## HISTORY

---

- Which company's first successful product was a sine-wave generator?
  - Variable frequency
  - Lab Instrument



Lecture

8/31/2003

ECE-2025 Fall-2003 jMc

7

## READING ASSIGNMENTS

---

- This Lecture:
  - Chapter 3, Section 3-1
- Other Reading:
  - Appendix A: Complex Numbers
- Next Lecture: Ch 3, Sects 3-2, 3-3, 3-7 & 3-8

8/31/2003

ECE-2025 Fall-2003 jMc

8

## LECTURE OBJECTIVES

- Sinusoids with **DIFFERENT** Frequencies
  - SYNTHESIZE by Adding Sinusoids

$$x(t) = \sum_{k=1}^N A_k \cos(2\pi f_k t + \varphi_k)$$

- **SPECTRUM** Representation
  - Graphical Form shows **DIFFERENT** Freqs


8/31/2003

ECE-2025 Fall-2003 jMc

9

## FREQUENCY DIAGRAM

- Plot Complex Amplitude vs. Freq

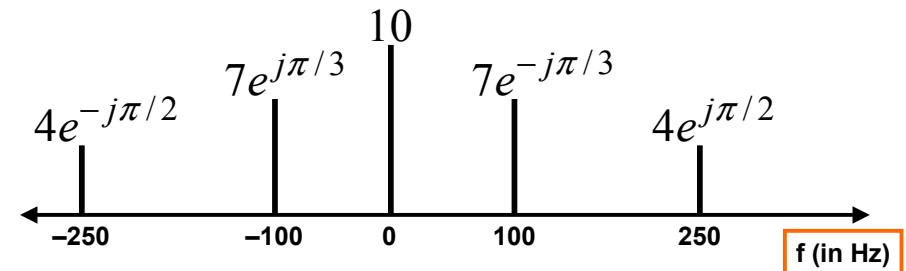

8/31/2003

ECE-2025 Fall-2003 jMc

10

## Another FREQ. Diagram

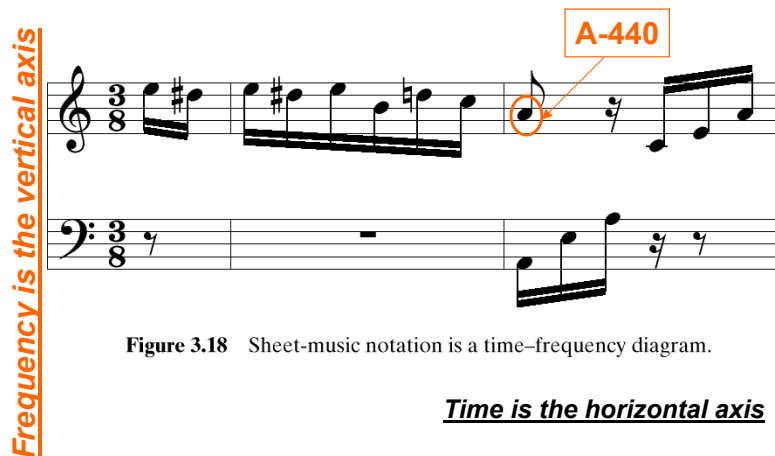




Figure 3.18 Sheet-music notation is a time–frequency diagram.

8/31/2003

ECE-2025 Fall-2003 jMc

11

## MOTIVATION


- Synthesize **Complicated** Signals
  - Musical Notes 
    - Piano uses 3 strings for many notes
    - Chords: play several notes simultaneously
  - Human Speech
    - Vowels have dominant frequencies 
    - Application: computer generated speech
  - Can **all** signals be generated this way?
    - Sum of sinusoids?

8/31/2003

ECE-2025 Fall-2003 jMc

12

## Fur Elise WAVEFORM

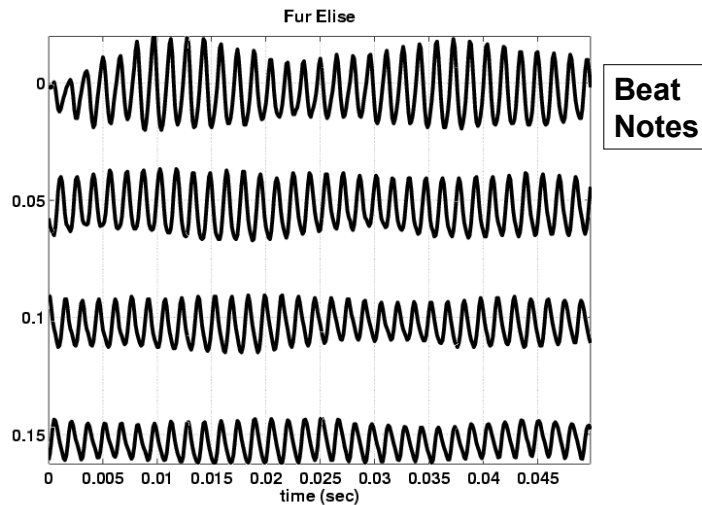


8/31/2003

13

## Speech Signal: BAT

- Nearly **Periodic** in Vowel Region
  - Period is (Approximately)  $T = 0.0065$  sec

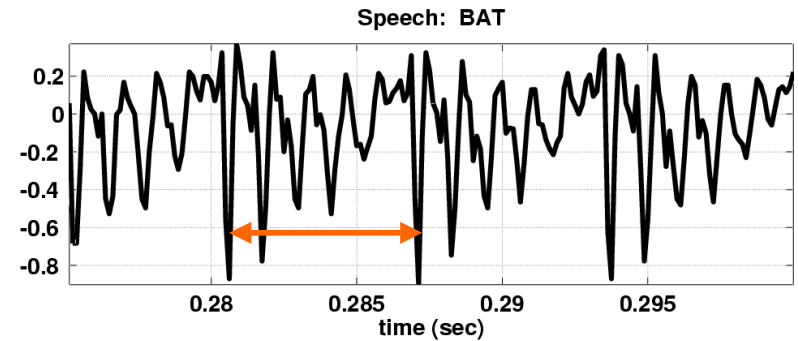

8/31/2003

ECE-2025 Fall-2003 jMc

14

## Euler's Formula Reversed

- Solve for **cosine** (or sine)

$$e^{j\omega t} = \cos(\omega t) + j \sin(\omega t)$$

$$e^{-j\omega t} = \cos(-\omega t) + j \sin(-\omega t)$$

$$e^{-j\omega t} = \cos(\omega t) - j \sin(\omega t)$$

$$e^{j\omega t} + e^{-j\omega t} = 2 \cos(\omega t)$$

$$\cos(\omega t) = \frac{1}{2}(e^{j\omega t} + e^{-j\omega t})$$

8/31/2003

ECE-2025 Fall-2003 jMc

15

## INVERSE Euler's Formula

- Solve for **cosine** (or sine)

$$\cos(\omega t) = \frac{1}{2}(e^{j\omega t} + e^{-j\omega t})$$

$$\sin(\omega t) = \frac{1}{2j}(e^{j\omega t} - e^{-j\omega t})$$

8/31/2003

ECE-2025 Fall-2003 jMc

16

## SPECTRUM Interpretation

- Cosine = sum of 2 complex exponentials:

$$A \cos(7t) = \frac{A}{2} e^{j7t} + \frac{A}{2} e^{-j7t}$$

One has a positive frequency  
The other has **negative** freq.  
Amplitude of each is half as big

## NEGATIVE FREQUENCY

- Is negative frequency real?
- Doppler Radar provides an example
  - Police radar measures speed by using the Doppler shift principle
  - Let's assume 400Hz  $\leftrightarrow$  60 mph
  - **+400Hz** means towards the radar
  - **-400Hz** means away (opposite **direction**)
  - Think of a train whistle

## SPECTRUM of SINE

- Sine = sum of 2 complex exponentials:

$$\begin{aligned} A \sin(7t) &= \frac{A}{2j} e^{j7t} - \frac{A}{2j} e^{-j7t} \\ &= \frac{1}{2} A e^{-j0.5\pi} e^{j7t} + \frac{1}{2} A e^{j0.5\pi} e^{-j7t} \end{aligned}$$


$$\frac{-1}{j} = j = e^{j0.5\pi}$$

- Positive freq. has phase =  $-0.5\pi$
- Negative freq. has phase =  $+0.5\pi$

## GRAPHICAL SPECTRUM

EXAMPLE of SINE


$$A \sin(7t) = \frac{1}{2} A e^{-j0.5\pi} e^{j7t} + \frac{1}{2} A e^{j0.5\pi} e^{-j7t}$$

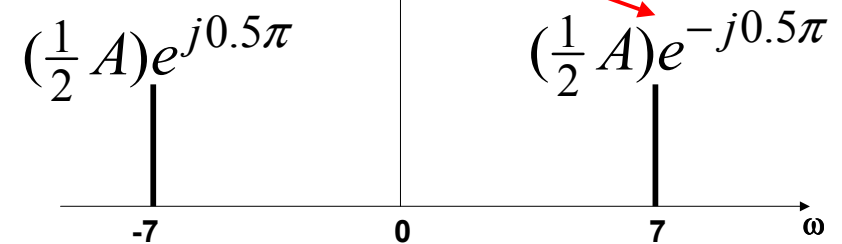

AMPLITUDE, PHASE & FREQUENCY are shown

# SPECTRUM ---> SINUSOID

- Add the spectrum components:

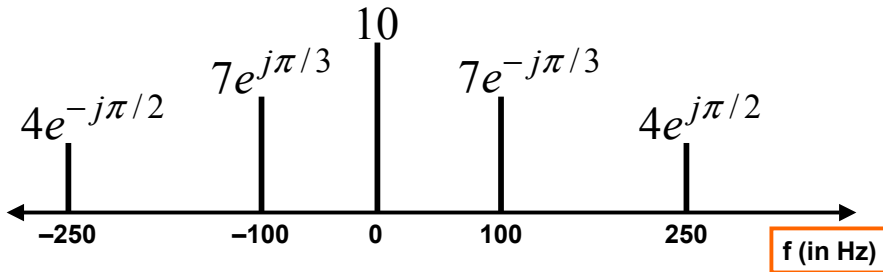

What is the formula for the signal  $x(t)$ ?

# Gather $(A, \omega, \phi)$ information

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>Frequencies:                     <ul style="list-style-type: none"> <li>-250 Hz</li> <li>-100 Hz</li> <li>0 Hz</li> <li>100 Hz</li> <li>250 Hz</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>Amplitude &amp; Phase                     <ul style="list-style-type: none"> <li>4 <math>-\pi/2</math></li> <li>7 <math>+\pi/3</math></li> <li>10 <b>0</b></li> <li>7 <math>-\pi/3</math></li> <li>4 <math>+\pi/2</math></li> </ul> </li> </ul> |
|--|--|

Note the **conjugate phase**

DC is another name for zero-freq component


DC component always has  $\phi=0$  or  $\pi$  (for real  $x(t)$ )

# Add Spectrum Components-1

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>Frequencies:                     <ul style="list-style-type: none"> <li>-250 Hz</li> <li>-100 Hz</li> <li>0 Hz</li> <li>100 Hz</li> <li>250 Hz</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>Amplitude &amp; Phase                     <ul style="list-style-type: none"> <li>4 <math>-\pi/2</math></li> <li>7 <math>+\pi/3</math></li> <li>10 <b>0</b></li> <li>7 <math>-\pi/3</math></li> <li>4 <math>+\pi/2</math></li> </ul> </li> </ul> |
|--|--|

$$x(t) = 10 + 7e^{-j\pi/3} e^{j2\pi(100)t} + 7e^{j\pi/3} e^{-j2\pi(100)t} + 4e^{j\pi/2} e^{j2\pi(250)t} + 4e^{-j\pi/2} e^{-j2\pi(250)t}$$

# Add Spectrum Components-2

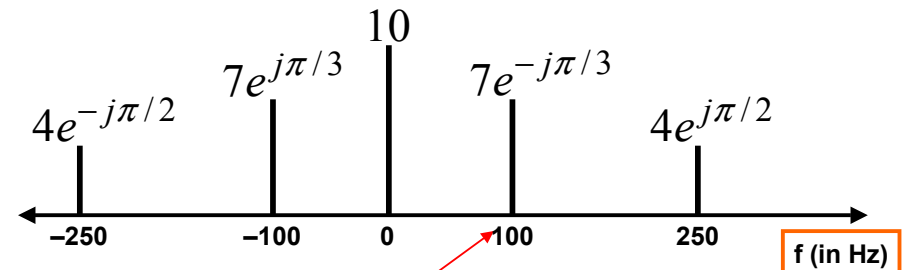

$$x(t) = 10 + 7e^{-j\pi/3} e^{j2\pi(100)t} + 7e^{j\pi/3} e^{-j2\pi(100)t} + 4e^{j\pi/2} e^{j2\pi(250)t} + 4e^{-j\pi/2} e^{-j2\pi(250)t}$$

## Simplify Components

$$x(t) = 10 + 7e^{-j\pi/3}e^{j2\pi(100)t} + 7e^{j\pi/3}e^{-j2\pi(100)t} + 4e^{j\pi/2}e^{j2\pi(250)t} + 4e^{-j\pi/2}e^{-j2\pi(250)t}$$

Use Euler's Formula to get **REAL** sinusoids:

$$A \cos(\omega t + \varphi) = \frac{1}{2} A e^{j\varphi} e^{j\omega t} + \frac{1}{2} A e^{-j\varphi} e^{-j\omega t}$$

8/31/2003


ECE-2025 Fall-2003 jMc

25

## FINAL ANSWER

$$x(t) = 10 + 14 \cos(2\pi(100)t - \pi/3) + 8 \cos(2\pi(250)t + \pi/2)$$

So, we get the general form:

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi f_k t + \varphi_k)$$


8/31/2003

ECE-2025 Fall-2003 jMc

26

## Summary: GENERAL FORM

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi f_k t + \varphi_k)$$

$$x(t) = X_0 + \sum_{k=1}^N \Re\{X_k e^{j2\pi f_k t}\}$$

$$\Re\{z\} = \frac{1}{2} z + \frac{1}{2} z^*$$

$$X_k = A_k e^{j\varphi_k}$$

Frequency =  $f_k$

$$x(t) = X_0 + \sum_{k=1}^N \left\{ \frac{1}{2} X_k e^{j2\pi f_k t} + \frac{1}{2} X_k^* e^{-j2\pi f_k t} \right\}$$

8/31/2003

ECE-2025 Fall-2003 jMc

27

## Example: Synthetic Vowel

- Sum of 5 Frequency Components

$f_k$ (Hz)	$X_k$	Mag	Phase (rad)
200	$(771 + j12202)$	12,226	1.508
400	$(-8865 + j28048)$	29,416	1.876
500	$(48001 - j8995)$	48,836	-0.185
1600	$(1657 - j13520)$	13,621	-1.449
1700	$4723 + j0$	4723	0

**Table 3.1:** Complex amplitudes for harmonic signal that approximates the vowel sound "ah".


8/31/2003

ECE-2025 Fall-2003 jMc

28

# SPECTRUM of VOWEL

- Note: Spectrum has  $0.5X_k$  (except  $X_{DC}$ )
- Conjugates in negative frequency

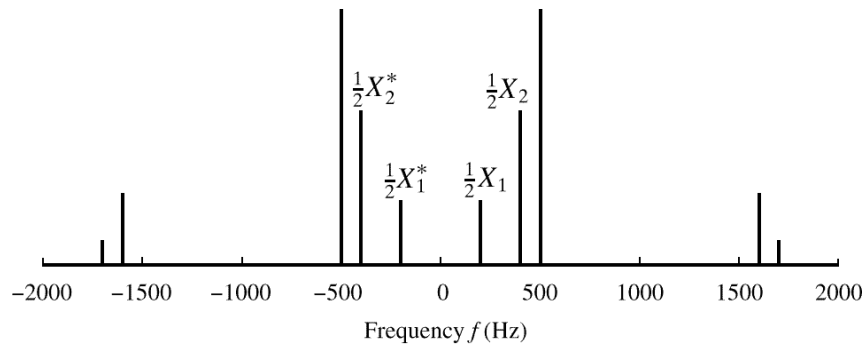


8/31/2003


ECE-2025 Fall-2003 jMc

29

# SPECTRUM of VOWEL (Polar Format)

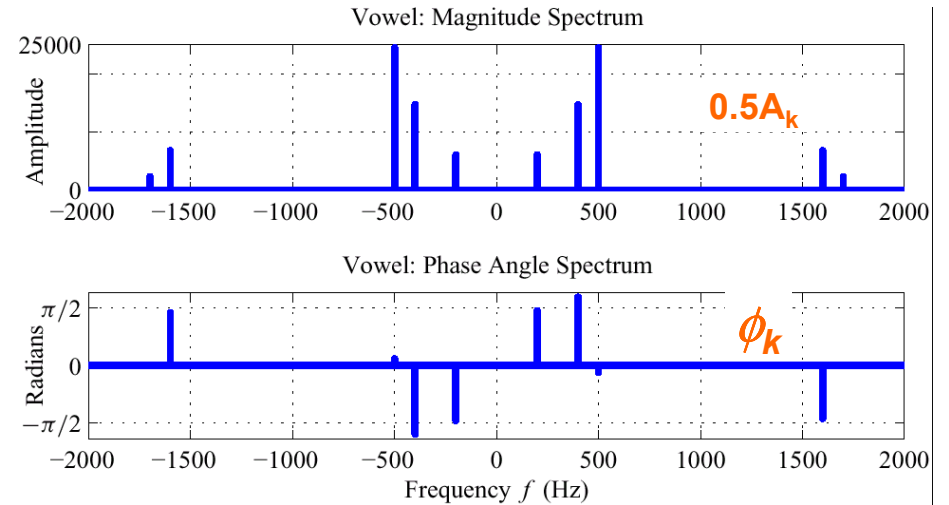

# Vowel Waveform (sum of all 5 components)

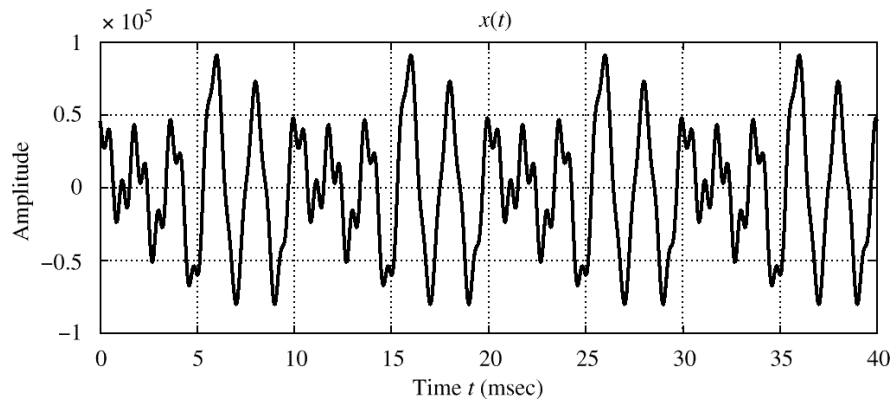

**Figure 3.11** Sum of all of the terms in (3.3.4). Note that the period is 10 msec, which equals  $1/f_0$ .

8/31/2003

ECE-2025 Fall-2003 jMc

31