

## Lecture 7 Fourier Series & Spectrum 12-Sept-2003

## Quiz #1 Info

---

- **Quiz #1 on 19-Sept-03 (Friday)**
  - Coverage: HW #1, #2, #3 and #4
  - Allowed one page of notes (Handwritten)
  - Review Session Planned:  
Thursday, 18-Sept, in ECE Auditorium
  - Check WebCT for other related announcements
- Old Quizzes & Problems are linked via WebCT:
  - **“Word from Previous Semesters”**

## The Rules

---

- Quizzes
  - NO make-ups given
  - Next Quiz would count for the one missed, IF excused
- Excused Absence
  - Must be written (by an “official”)
  - Notify ahead of time via e-mail
- Consult “INFO” on Web-CT for more details

## Sinusoidal Synthesis

---

- Use Short-Duration Sinusoids:
  - Amp, Phase, Frequency & **Duration**


$$x(t) = A_k \cos(2\pi f_k t + \phi_k) \quad \text{for } t_k \leq t \leq t_{k+1}$$

- Freq will change every **FRAME**

$$t_k \leq t \leq t_{k+1}$$

- Then ADD several sinusoids together

# ANALYSIS --> SYNTHESIS

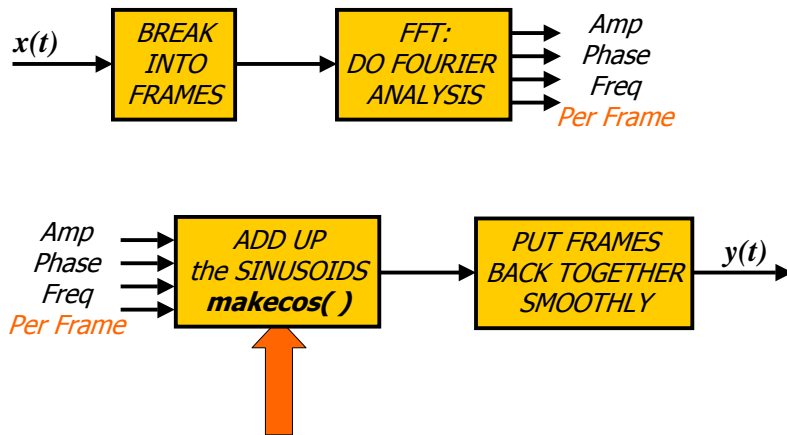

9/11/2003

EE-2025 Spring-2003 jMc

5

# Sine Synthesis: SPEECH


- FRAME Length = 10 millisec
- Examples:
  - Original
  - 9 sinusoids per frame
  - 4 sinusoids
  - 2 sinusoids
- Need to **SMOOTH** Boundaries

9/11/2003

EE-2025 Spring-2003 jMc

6

# Time-Varying FREQUENCIES “Diagram”

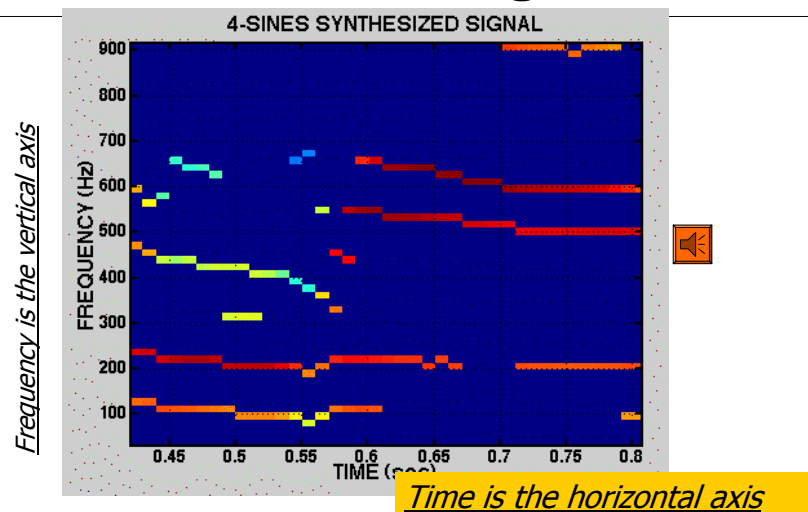


9/11/2003

EE-2025 Spring-2003 jMc

7

# 4-SINES Spectrogram

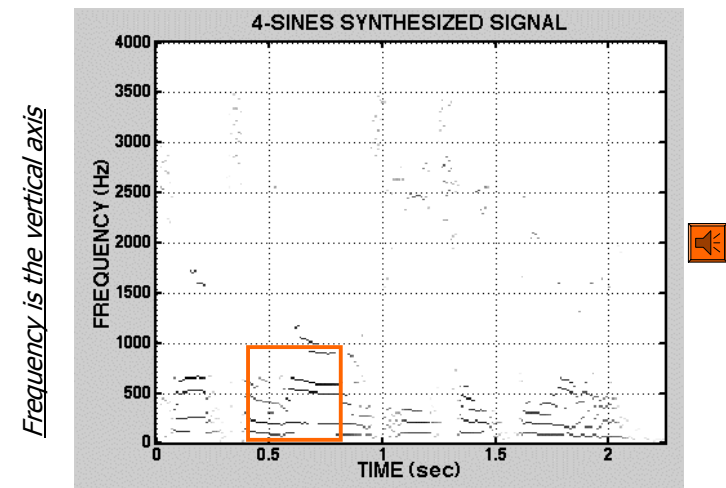


9/11/2003

EE-2025 Spring-2003 jMc

8

# 9-SINES Spectrogram

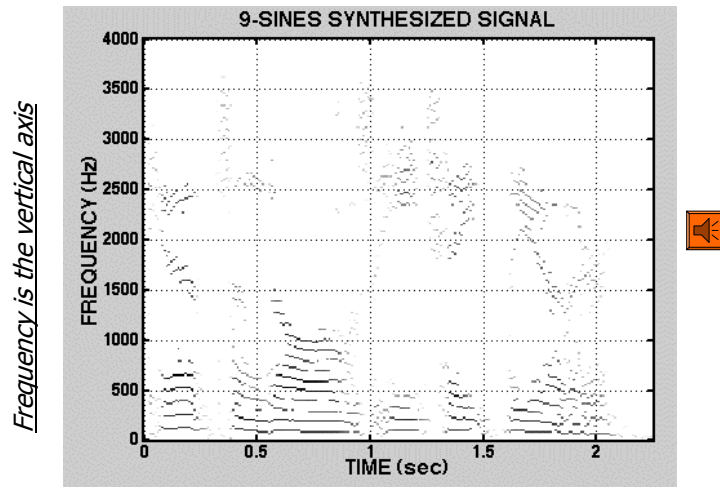


9/11/2003

EE-2025 Spring-2003 jMc

9

# 2-SINES Spectrogram

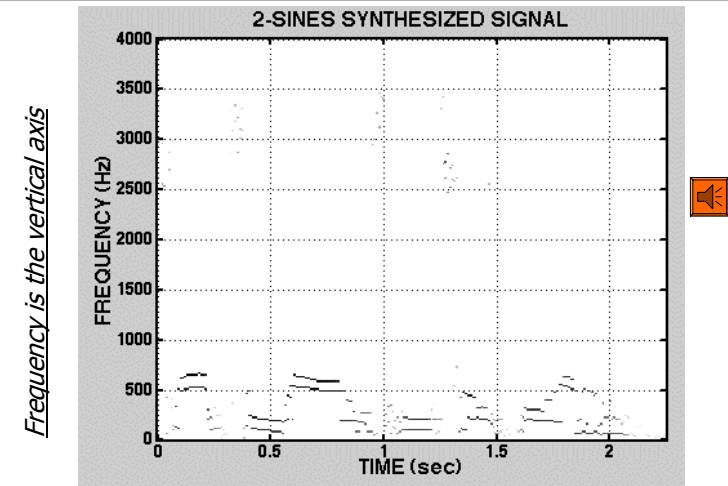


9/11/2003

EE-2025 Spring-2003 jMc

10

# TIME SIGNALS: COMPARE

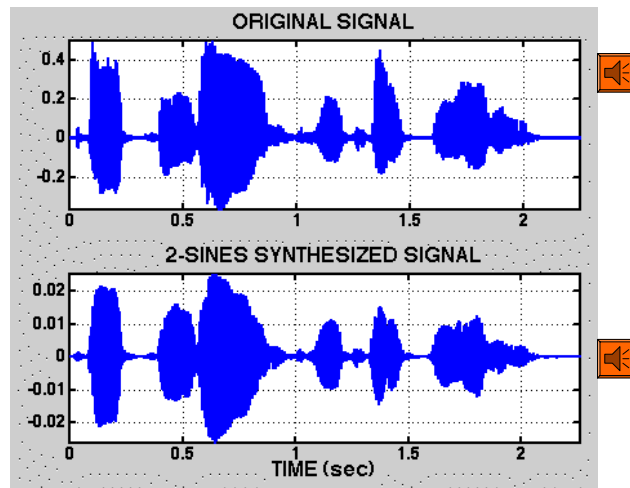


9/11/2003

EE-2025 Spring-2003 jMc

11

# TIME SIGNALS: ZOOM

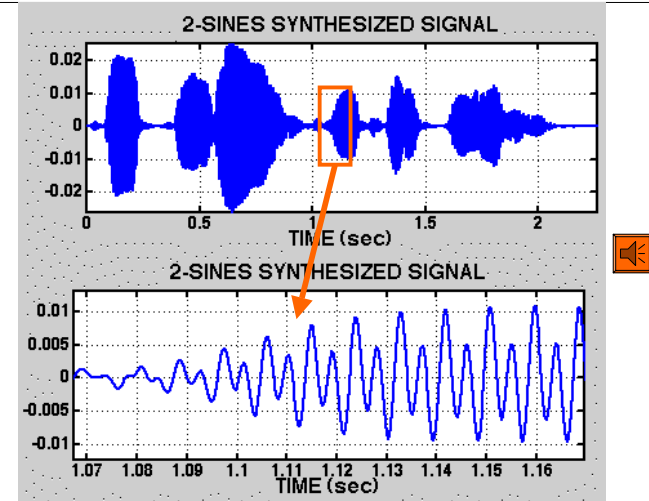

9/11/2003

EE-2025 Spring-2003 jMc

12

## READING ASSIGNMENTS

- This Lecture:
  - **Fourier Series in Ch 3, Sects 3-4, 3-5 & 3-6**
    - Replaces pp. 62-66 in Ch 3 in DSP First
    - Notation:  $a_k$  for Fourier Series
- Other Reading:
  - Next Lecture: Sampling

9/11/2003

EE-2025 Spring-2003 jMc

13

## LECTURE OBJECTIVES

- **ANALYSIS** via Fourier Series
  - For **PERIODIC** signals:  $x(t+T_0) = x(t)$

$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi k/T_0)t} dt$$

- **SPECTRUM** from Fourier Series
  - $a_k$  is Complex Amplitude for k-th Harmonic


9/11/2003

EE-2025 Spring-2003 jMc

14

## SPECTRUM DIAGRAM

- Recall Complex Amplitude vs. Freq

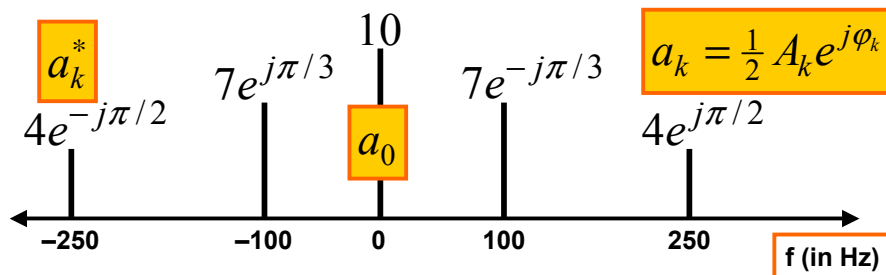

$$x(t) = a_0 + \sum_{k=1}^N \left\{ a_k e^{j2\pi f_k t} + a_k^* e^{-j2\pi f_k t} \right\}$$

9/11/2003

EE-2025 Spring-2003 jMc

15

## Harmonic Signal

$$x(t) = \sum_{k=-\infty}^{\infty} a_k e^{j2\pi k f_0 t}$$

PERIOD/FREQUENCY of COMPLEX EXPONENTIAL:

$$2\pi(f_0) = \omega_0 = \frac{2\pi}{T_0} \quad \text{or} \quad T_0 = \frac{1}{f_0}$$


9/11/2003

EE-2025 Spring-2003 jMc

16

## Example

$$x(t) = \sin^3(3\pi t)$$

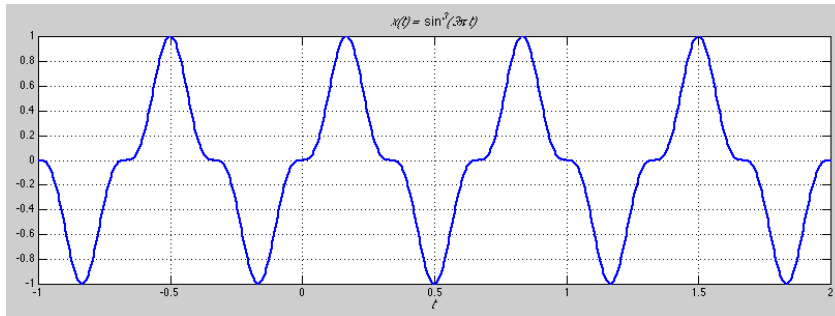

$$x(t) = \left(\frac{j}{8}\right)e^{j9\pi t} + \left(\frac{-3j}{8}\right)e^{j3\pi t} + \left(\frac{3j}{8}\right)e^{-j3\pi t} + \left(\frac{-j}{8}\right)e^{-j9\pi t}$$

9/11/2003

EE-2025 Spring-2003 jMc


17

## Example

$$x(t) = \sin^3(3\pi t)$$

$$x(t) = \left(\frac{j}{8}\right)e^{j9\pi t} + \left(\frac{-3j}{8}\right)e^{j3\pi t} + \left(\frac{3j}{8}\right)e^{-j3\pi t} + \left(\frac{-j}{8}\right)e^{-j9\pi t}$$

In this case, analysis just requires picking off the coefficients.

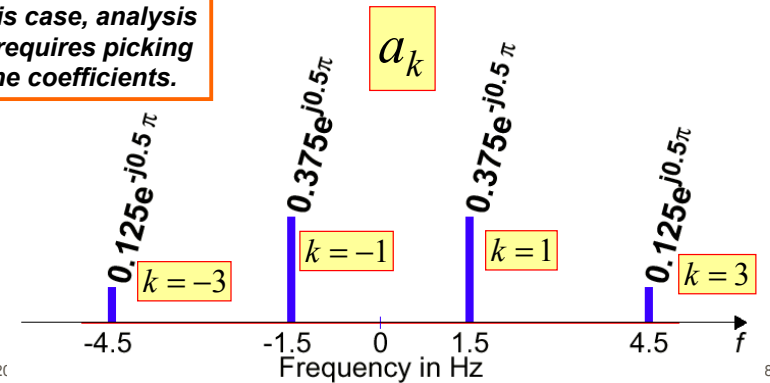

9/11/20

8

## STRATEGY: $x(t) \rightarrow a_k$

### ANALYSIS

- Get representation from the signal
- Works for **PERIODIC** Signals
- Fourier Series
  - Answer is: an INTEGRAL over one period

$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j\omega_0 k t} dt$$

9/11/2003


EE-2025 Spring-2003 jMc

19

## SQUARE WAVE EXAMPLE

$$x(t) = \begin{cases} 1 & 0 \leq t < \frac{1}{2} T_0 \\ 0 & \frac{1}{2} T_0 \leq t < T_0 \end{cases}$$

for  $T_0 = 0.04$  sec.

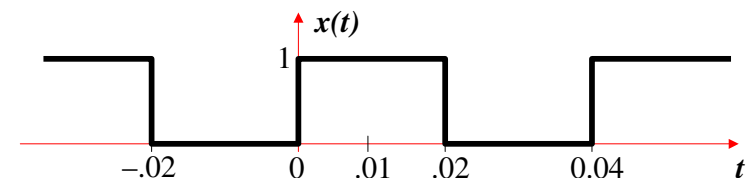

9/11/2003

EE-2025 Spring-2003 jMc

20

## FS for a SQUARE WAVE $\{a_k\}$

$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi/T_0)kt} dt \quad (k \neq 0)$$

$$a_k = \frac{1}{.04} \int_0^{.02} 1 e^{-j(2\pi/.04)kt} dt = \frac{1}{.04(-j2\pi k/.04)} e^{-j(2\pi/.04)kt} \Big|_0^{.02}$$

$$= \frac{1}{(-j2\pi k)} (e^{-j(\pi)k} - 1) = \frac{1 - (-1)^k}{j2\pi k}$$

9/11/2003

EE-2025 Spring-2003 jMc

21

## DC Coefficient: $a_0$

$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi/T_0)kt} dt \quad (k = 0)$$

$$a_0 = \frac{1}{T_0} \int_0^{T_0} x(t) dt = \frac{1}{T_0} (\text{Area})$$

$$a_0 = \frac{1}{.04} \int_0^{.02} 1 dt = \frac{1}{.04} (.02 - 0) = \frac{1}{2}$$

9/11/2003

EE-2025 Spring-2003 jMc

22

## Fourier Coefficients $a_k$

- $a_k$  is a function of  $k$ 
  - Complex Amplitude for  $k$ -th Harmonic
  - This one doesn't depend on the period,  $T_0$

$$a_k = \frac{1 - (-1)^k}{j2\pi k} = \begin{cases} \frac{1}{j\pi k} & k = \pm 1, \pm 3, \dots \\ 0 & k = \pm 2, \pm 4, \dots \\ \frac{1}{2} & k = 0 \end{cases}$$

9/11/2003


EE-2025 Spring-2003 jMc

23

## Spectrum from Fourier Series

$$\omega_0 = 2\pi / (0.04) = 2\pi(25)$$

$$a_k = \begin{cases} \frac{-j}{\pi k} & k = \pm 1, \pm 3, \dots \\ 0 & k = \pm 2, \pm 4, \dots \\ \frac{1}{2} & k = 0 \end{cases}$$

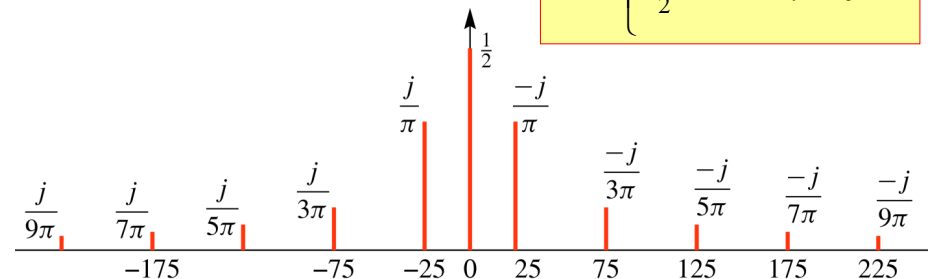

9/11/2003

EE-2025 Spring-2003 jMc

24

# Fourier Series Synthesis

- HOW do you **APPROXIMATE**  $x(t)$  ?

$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi/T_0)kt} dt$$

- Use **FINITE** number of coefficients


$$x(t) = \sum_{k=-N}^N a_k e^{j2\pi k f_0 t} \quad a_{-k} = a_k^* \text{ when } x(t) \text{ is real}$$

9/11/2003

EE-2025 Spring-2003 jMc


25

# Fourier Series Synthesis

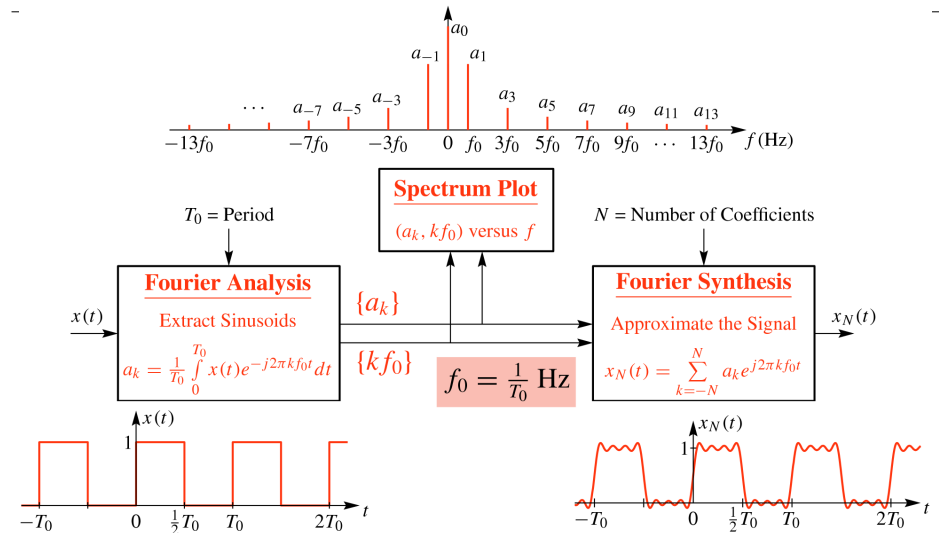

## Synthesis: 1st & 3rd Harmonics

$$y(t) = \frac{1}{2} + \frac{2}{\pi} \cos(2\pi(25)t - \frac{\pi}{2}) + \frac{2}{3\pi} \cos(2\pi(75)t - \frac{\pi}{2})$$

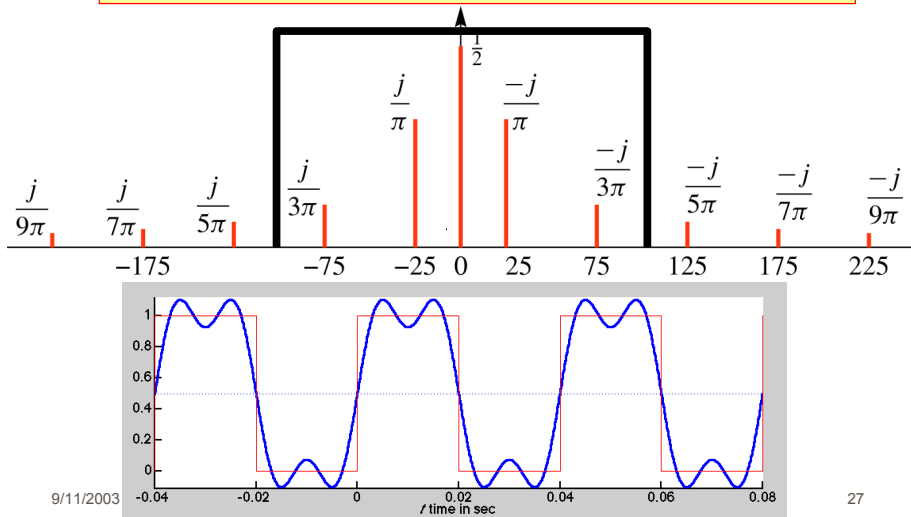


9/11/2003

27

## Synthesis: up to 7th Harmonic

$$y(t) = \frac{1}{2} + \frac{2}{\pi} \cos(50\pi t - \frac{\pi}{2}) + \frac{2}{3\pi} \sin(150\pi t) + \frac{2}{5\pi} \sin(250\pi t) + \frac{2}{7\pi} \sin(350\pi t)$$

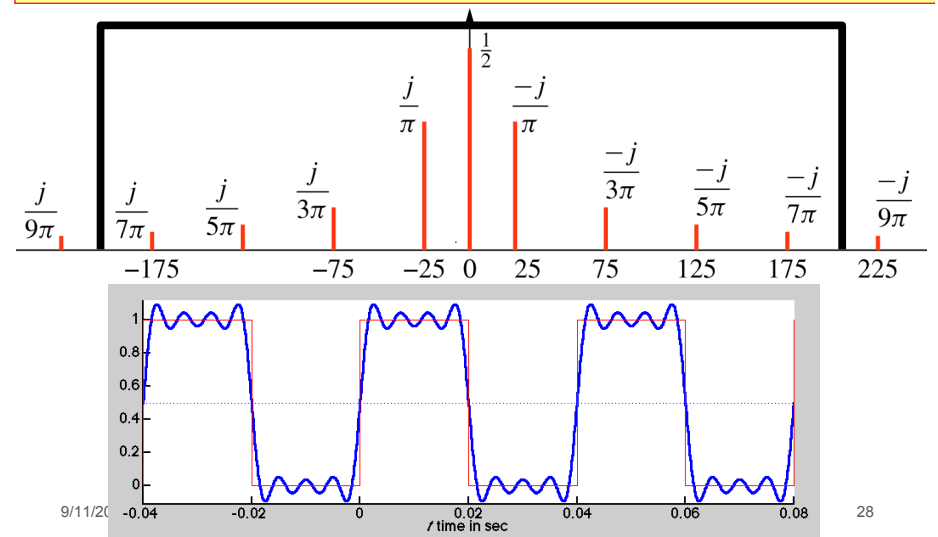


9/11/2003

28

# Fourier Synthesis

$$x_N(t) = \frac{1}{2} + \frac{2}{\pi} \sin(\omega_0 t) + \frac{2}{3\pi} \sin(3\omega_0 t) + \dots$$

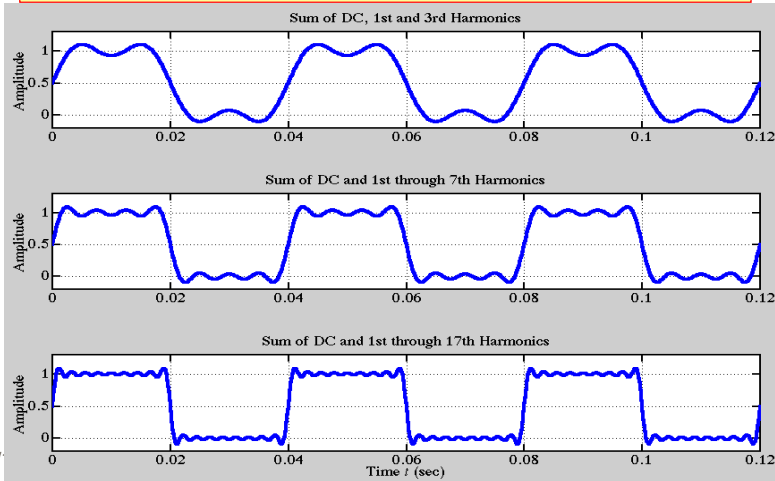


9/

29

# Gibbs' Phenomenon

- Convergence at **DISCONTINUITY** of  $x(t)$ 
  - There is always an **overshoot**
  - 9%** for the Square Wave case

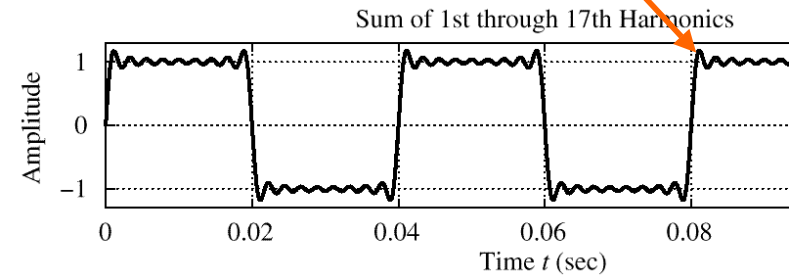

9/11/2003

EE-2025 Spring-2003 jMc

30

# Fourier Series Demos


- Fourier Series Java Applet
  - Greg Slabaugh
    - Interactive
  - <http://users.ece.gatech.edu/~slabaugh/java/fourier/fourier.html>
- MATLAB GUI: fseriesdemo
  - <http://users.ece.gatech.edu/mccllella/matlabGUIs/index.html>

9/11/2003

EE-2025 Spring-2003 jMc

31

# fseriesdemo GUI

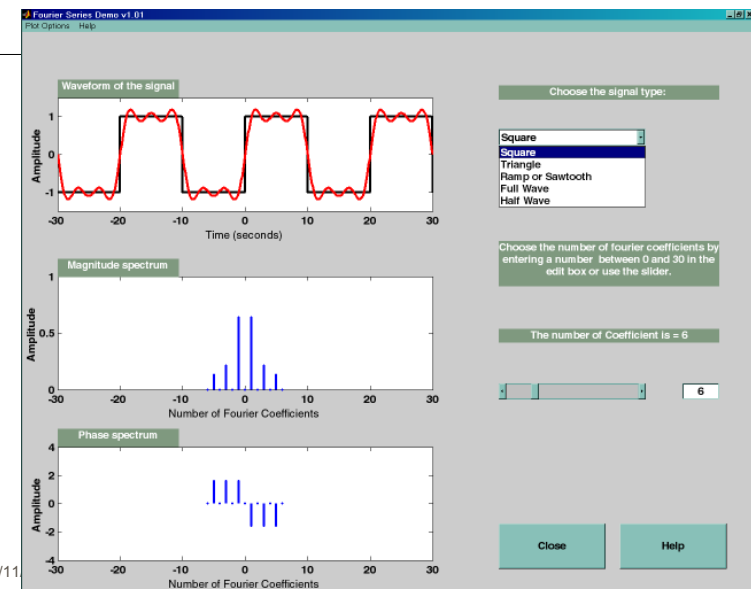

9/11

32