

**Lecture 16**  
**Continuous-Time Signals and Systems**  
**15-Mar-04**

**Info: Web-CT, Lab, HW**

- Quiz #2: resolve grades by 26-March
  - Graders were posted
- Quiz #3 will be 9-April (Friday)
  
- HW #8 due next week
- Lab #8 starts this week
  - Bandpass Filtering

**Quiz #2 Results**


Distribution for Quiz #2

Statistics:

Graded out of: 100.0    Highest grade: 99.0    Mean grade: 77.9  
 Number of records: 175    Lowest grade: 46.0    Median grade: 79.0

Score Range	Frequency
[ 45, 50 )	3
[ 50, 55 )	3
[ 55, 60 )	6
[ 60, 65 )	7
[ 65, 70 )	16
[ 70, 75 )	24
[ 75, 80 )	32
[ 80, 85 )	34
[ 85, 90 )	27
[ 90, 95 )	12
[ 95, 100 )	11
[ 100 ]	

**Concept Map: z-Transform**

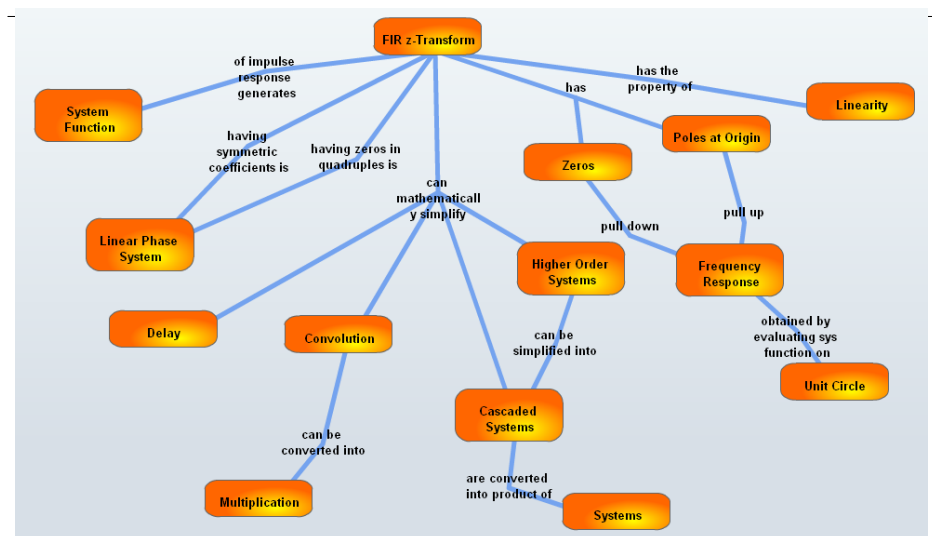


# 3 DOMAINS MOVIE: FIR

ZEROS MISSING


$H(z)$

$H(e^{j\hat{\omega}})$




$$1 + 0.618z^{-1} - 0.618z^{-2} - z^{-3} + z^{-5} + 0.618z^{-6} - 0.618z^{-7} - z^{-8}$$


DTFT: MAGNITUDE RESPONSE

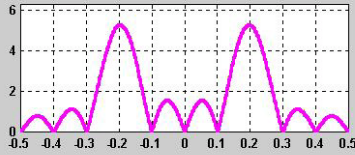

IMPULSE RESPONSE:  $h[n]$

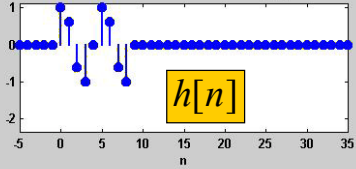

DTFT: PHASE RESPONSE (DEGREES)

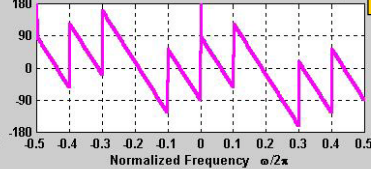


3/14/2004

ECE-2025 Fall-03 jMc

5

# PeZ Demo: Zero Placing

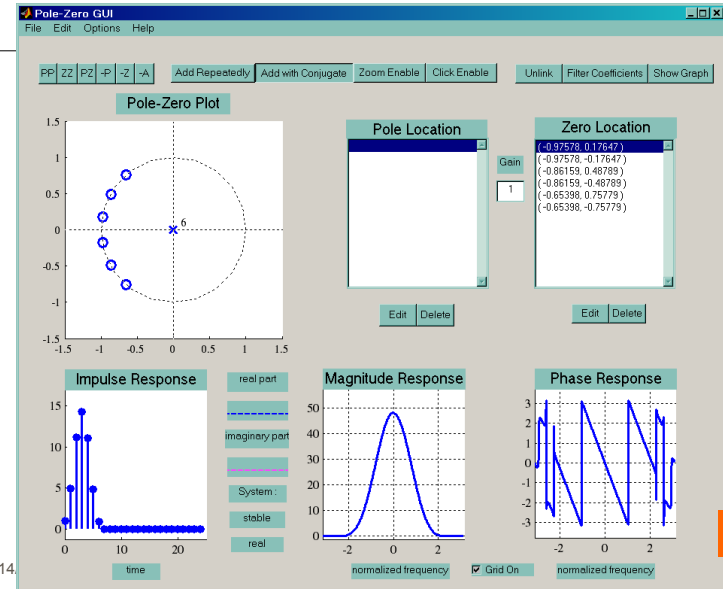

3/14

Lecture

6

# READING ASSIGNMENTS

- This Lecture:
  - Chapter 9, Sects 9-1 to 9-5
- Other Reading:
  - Recitation: Ch. 9, all
  - Next Lecture: Chapter 9, Sects 9-6 to 9-8

# LECTURE OBJECTIVES

- Bye bye to D-T Systems for a while
- The UNIT IMPULSE signal
  - Definition
  - Properties
- Continuous-time signals and systems
  - Example systems
  - Review: **L**inearity and **T**ime-**I**nvariance
  - Convolution integral: **impulse** response

3/14/2004

ECE-2025 Fall-03 jMc


7

3/14/2004

ECE-2025 Fall-03 jMc

8

## D-T Filtering of C-T Signals

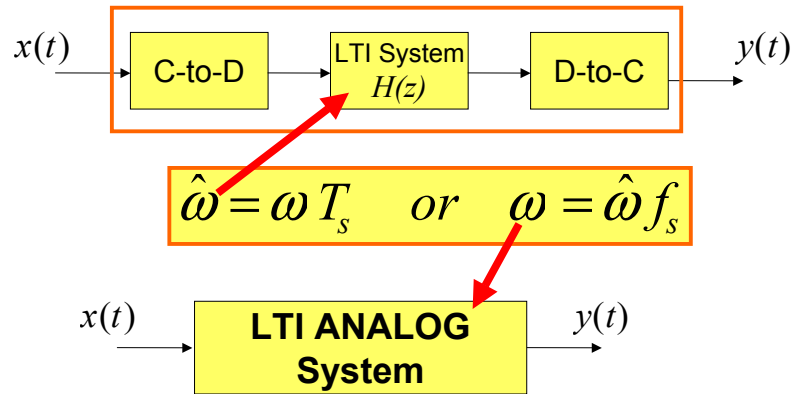

3/14/2004

ECE-2025 Fall-03 jMc

9

## ANALOG SIGNALS $x(t)$

- INFINITE LENGTH
  - SINUSOIDS:  $(t = \text{time in secs})$
  - PERIODIC SIGNALS
  - ONE-SIDED, e.g., for  $t > 0$ 
    - UNIT STEP:  $u(t)$
- FINITE LENGTH
  - SQUARE PULSE
- IMPULSE SIGNAL:  $\delta(t)$
  
- DISCRETE-TIME:  $x[n]$  is list of numbers

3/14/2004


ECE-2025 Fall-03 jMc

10

## CT Signals: PERIODIC

$$x(t) = 10 \cos(200\pi t)$$

Sinusoidal signal

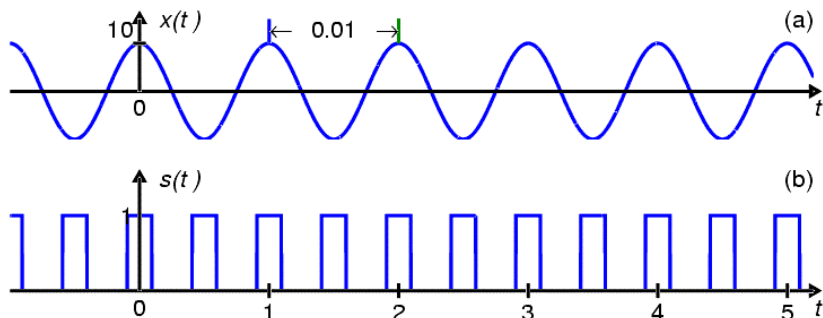

INFINITE DURATION

Square Wave

3/14/2004


ECE-2025 Fall-03 jMc

11

## CT Signals: ONE-SIDED

$$u(t) = \begin{cases} 1 & t > 0 \\ 0 & t < 0 \end{cases}$$

Unit step signal

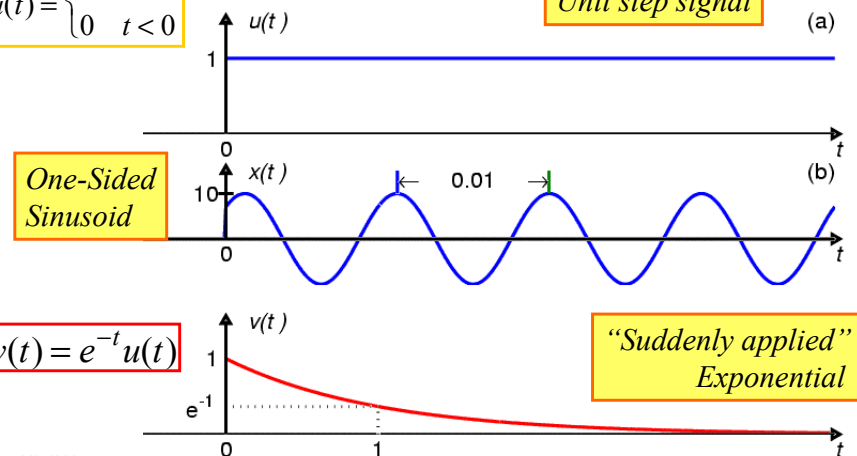

One-Sided Sinusoid


$$v(t) = e^{-t} u(t)$$

"Suddenly applied" Exponential

3/14/2004


# CT Signals: FINITE LENGTH

$$p(t) = u(t - 2) - u(t - 4)$$

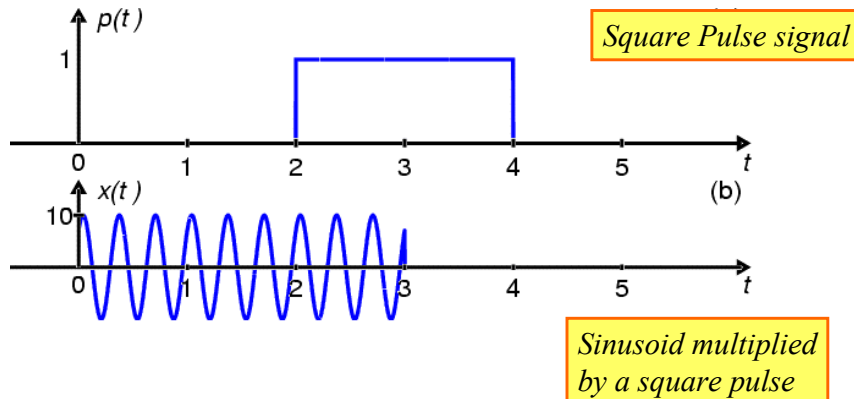

# What is an Impulse?

- A signal that is concentrated at one point.

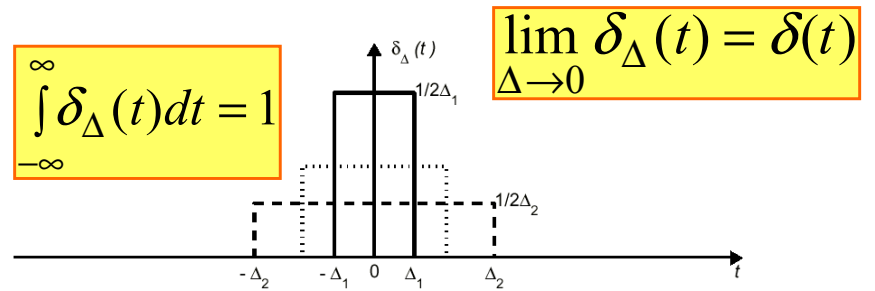

# Defining the Impulse

- Assume the properties apply to the limit:


$$\lim_{\Delta \rightarrow 0} \delta_{\Delta}(t) = \delta(t)$$

- One “**INTUITIVE**” definition is:

$$\delta(t) = 0, \quad t \neq 0 \quad \text{Concentrated at } t=0$$


$$\int_{-\infty}^{\infty} \delta(\tau) d\tau = 1 \quad \text{Unit area}$$

# Sampling Property

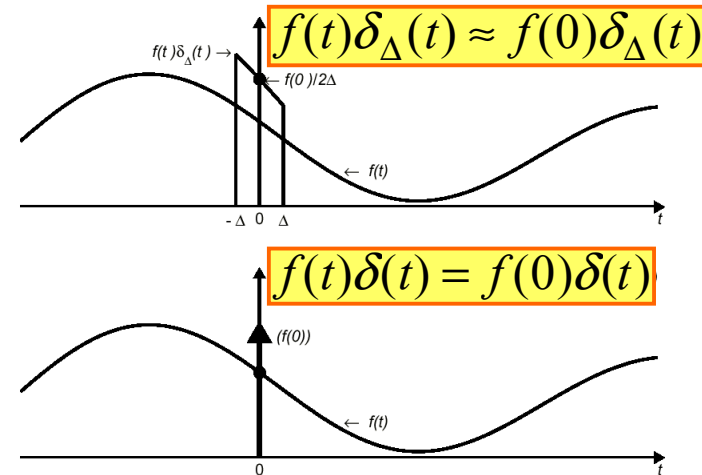

## General Sampling Property

$$f(t)\delta(t-t_0) = f(t_0)\delta(t-t_0)$$

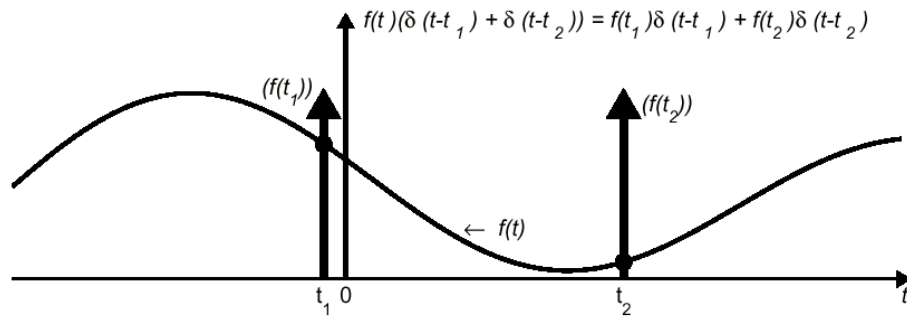

3/14/2004

ECE-2025 Fall-03 jMc

17

## Properties of the Impulse

$$\delta(t-t_0) = 0, \quad t \neq t_0$$

*Concentrated at one time*

$$\int_{-\infty}^{\infty} \delta(t-t_0) dt = 1$$

*Unit area*

$$f(t)\delta(t-t_0) = f(t_0)\delta(t-t_0)$$

*Sampling Property*

$$\int_{-\infty}^{\infty} f(t)\delta(t-t_0) dt = f(t_0)$$

*Extract one value of f(t)*

$$\frac{du(t)}{dt} = \delta(t)$$


*Derivative of unit step*

3/14/2004

ECE-2025 Fall-03 jMc

18

## Continuous-Time Systems

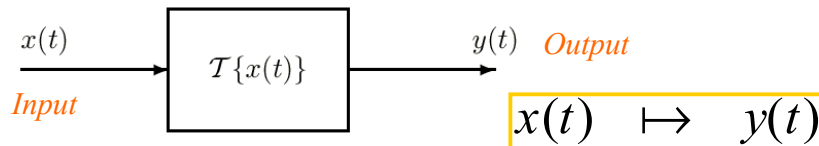

### Examples:

- Delay  $y(t) = x(t-t_d)$

- Modulator  $y(t) = [A + x(t)]\cos \omega_c t$

- Integrator  $y(t) = \int_{-\infty}^t x(\tau) d\tau$

## CT BUILDING BLOCKS

- INTEGRATOR (CIRCUITS)
- DIFFERENTIATOR
- DELAY by  $t_0$
- MODULATOR (e.g., AM Radio)
- MULTIPLIER & ADDER

3/14/2004

ECE-2025 Fall-03 jMc

19

3/14/2004

ECE-2025 Fall-03 jMc

20

## Ideal Delay:


- Mathematical Definition:

$$y(t) = x(t - t_d)$$


- To find the IMPULSE RESPONSE,  $h(t)$ , let  $x(t)$  be an impulse, so

$$h(t) = \delta(t - t_d)$$

## Output of Ideal Delay of 1 sec

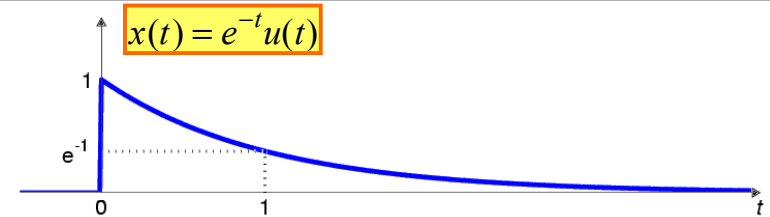

$$y(t) = x(t - 1) = e^{-(t-1)}u(t - 1)$$

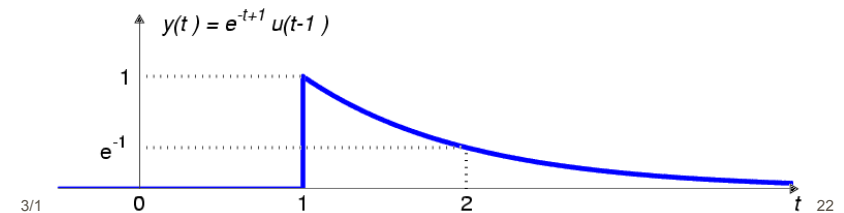

## Integrator:

- Mathematical Definition:

$$y(t) = \int_{-\infty}^t x(\tau) d\tau$$

Running Integral

- To find the IMPULSE RESPONSE,  $h(t)$ , let  $x(t)$  be an impulse, so

$$h(t) = \int_{-\infty}^t \delta(\tau) d\tau = u(t)$$

## Integrator:


$$y(t) = \int_{-\infty}^t x(\tau) d\tau$$

- Integrate the impulse

$$\int_{-\infty}^t \delta(\tau) d\tau = u(t)$$

- IF  $t < 0$ , we get zero
- IF  $t > 0$ , we get one
  - Thus we have  $h(t) = u(t)$  for the integrator

## Graphical Representation

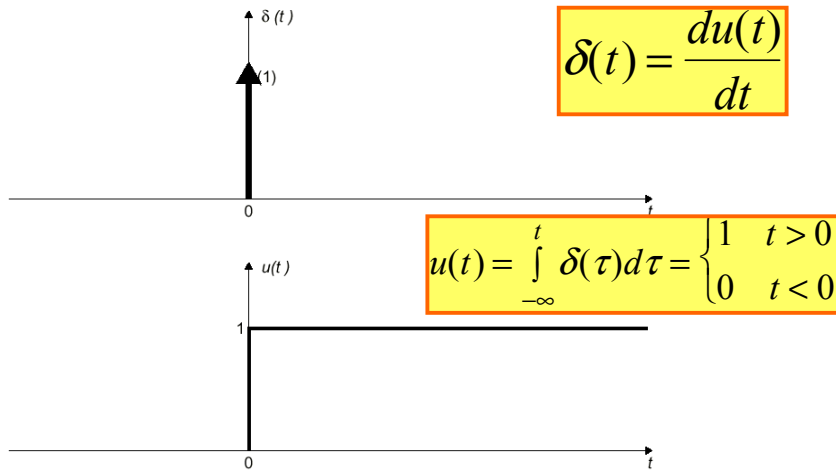


3/14/2004

ECE-2025 Fall-03 jMc

25

## Output of Integrator

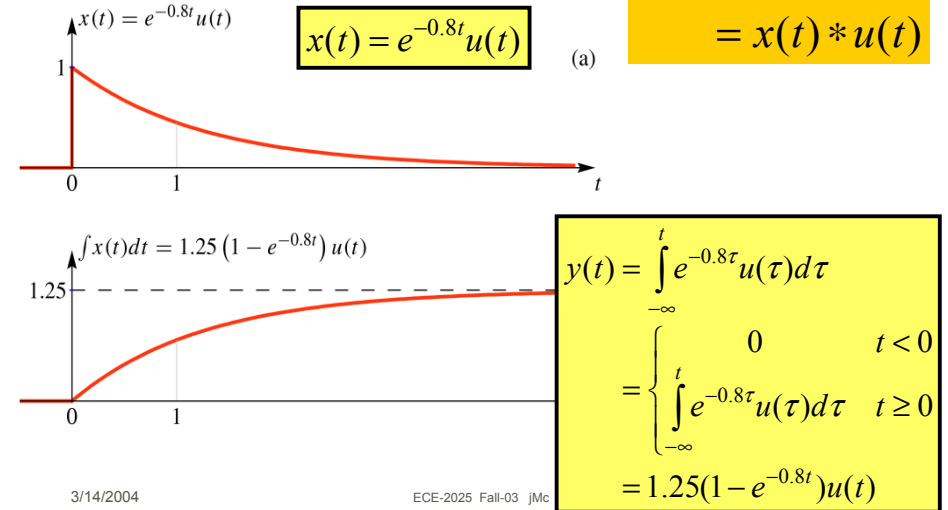

3/14/2004

ECE-2025 Fall-03 jMc

## Differentiator:

- Mathematical Definition:

$$y(t) = \frac{dx(t)}{dt}$$

- To find  $h(t)$ , let  $x(t)$  be an impulse, so


$$h(t) = \frac{d\delta(t)}{dt} = \delta^{(1)}(t) \quad \text{Doublet}$$

3/14/2004

ECE-2025 Fall-03 jMc

27

## Differentiator Output:

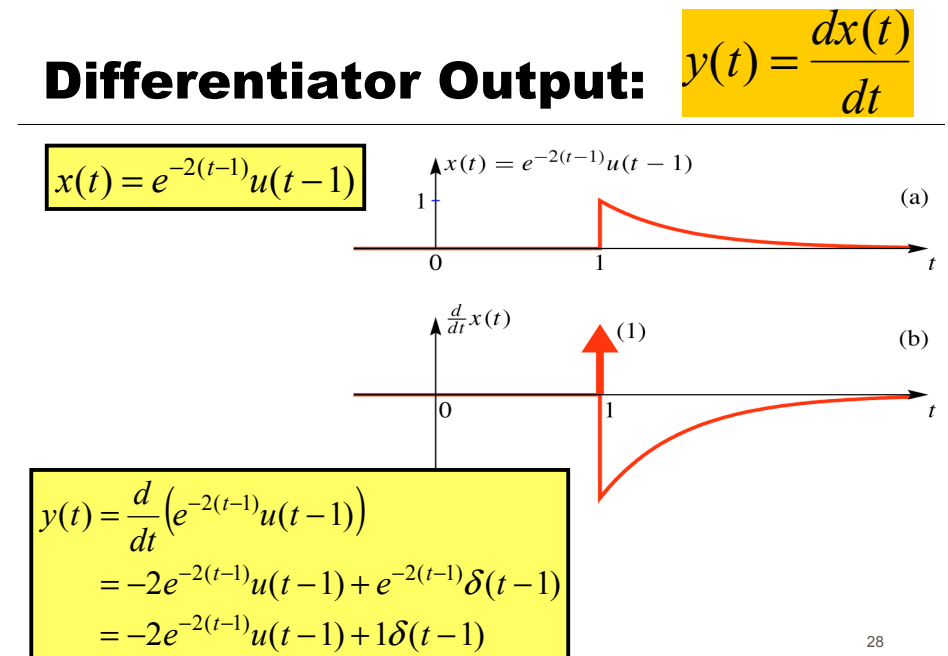

28


# Linear and Time-Invariant (LTI) Systems

- If a continuous-time system is both linear and time-invariant, then the output  $y(t)$  is related to the input  $x(t)$  by a **convolution integral**

$$y(t) = \int_{-\infty}^{\infty} x(\tau)h(t - \tau)d\tau = x(t) * h(t)$$

where  $h(t)$  is the **impulse response** of the system.

# Testing for Linearity

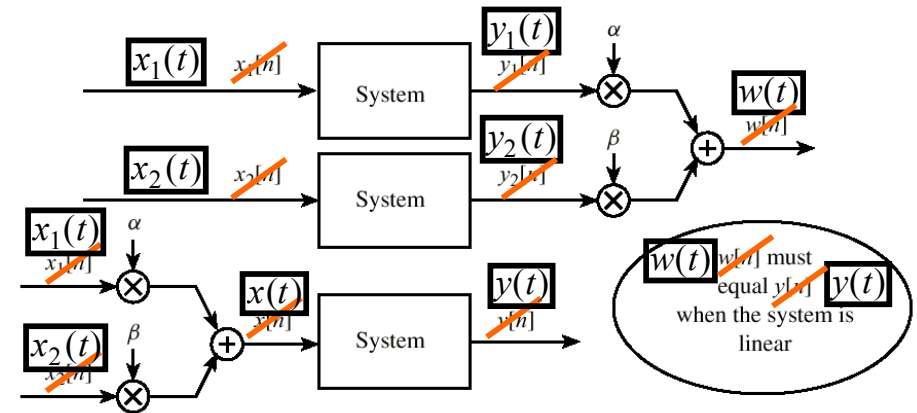

# Testing Time-Invariance

