

Lecture 20 Fourier Transform Properties 29-Mar-04

Info: Web-CT, Lab, HW

- CHECK YOUR GRADES !!!
 - Web-CT is the OFFICIAL gradebook
- Quiz #3 will be 9-April (Friday)
 - Coverage: HW #8, 9, and 10
 - Chapters 7, 9, 10, and 11
 - Review Session, 8-April, Thurs @ 7:30pm

Strategy for using the FT

- Develop a set of known Fourier transform pairs.
- Develop a set of “theorems” or properties of the Fourier transform.
- Develop skill in formulating the problem in either the time-domain or the frequency-domain, *whichever leads to the simplest solution.*

READING ASSIGNMENTS

- This Lecture:
 - Chapter 11, Sects. 11-5 to 11-9
 - **Tables in Section 11-9**
- Other Reading:
 - Recitation: Chapter 11, Sects. 11-1 to 11-9
 - Next Lectures: Chapter 12 (Applications)

LECTURE OBJECTIVES

- The Fourier transform

$$X(j\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt$$

- More examples of Fourier transform pairs
- Basic properties of Fourier transforms
 - **Convolution** property
 - **Multiplication** property

3/27/2004

ECE-2025 Fall-03 jMc

6

Fourier Transform

$$x(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega)e^{j\omega t} d\omega$$

Fourier Synthesis
(Inverse Transform)

$$X(j\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt$$

Fourier Analysis
(Forward Transform)

$$\text{Time - domain} \Leftrightarrow \text{Frequency - domain}$$
$$x(t) \Leftrightarrow X(j\omega)$$

WHY use the Fourier transform?

- Manipulate the **“Frequency Spectrum”**
- Analog Communication Systems
 - AM: Amplitude Modulation; FM
 - What are the **“Building Blocks”** ?
 - **Abstract Layer**, not implementation
- Ideal Filters: mostly BPFs
- Frequency Shifters
 - aka Modulators, Mixers or Multipliers: $x(t)p(t)$


3/27/2004

ECE-2025 Fall-03 jMc

8

Frequency Response

- Fourier Transform of $h(t)$ **is** the Frequency Response

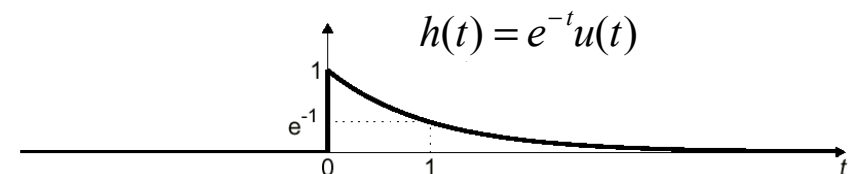


$$h(t) = e^{-t}u(t) \Leftrightarrow H(j\omega) = \frac{1}{1 + j\omega}$$

3/27/2004


ECE-2025 Fall-03 jMc

9

$$x(t) = \begin{cases} 1 & |t| < T/2 \\ 0 & |t| > T/2 \end{cases} \Leftrightarrow X(j\omega) = \frac{\sin(\omega T/2)}{(\omega/2)}$$

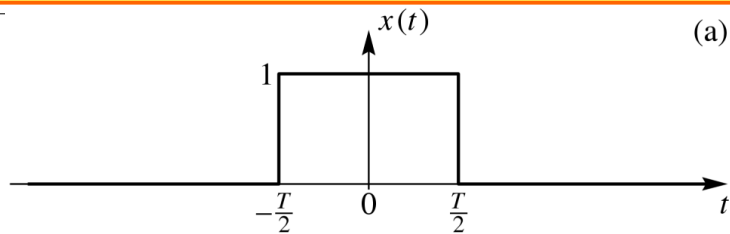

(a)

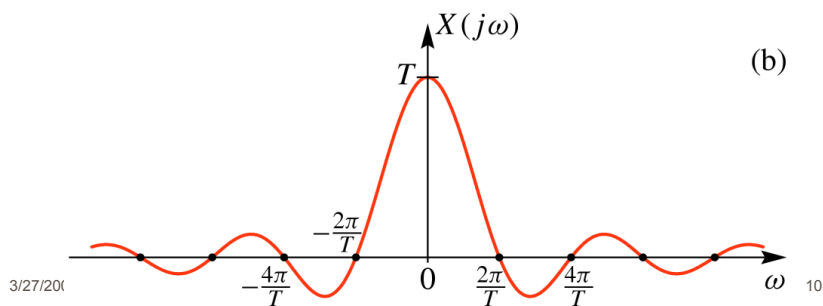


(b)


3/27/20

10

$$x(t) = \frac{\sin(\omega_0 t)}{(\pi t)} \Leftrightarrow X(j\omega) = \begin{cases} 1 & |\omega| < \omega_0 \\ 0 & |\omega| > \omega_0 \end{cases}$$

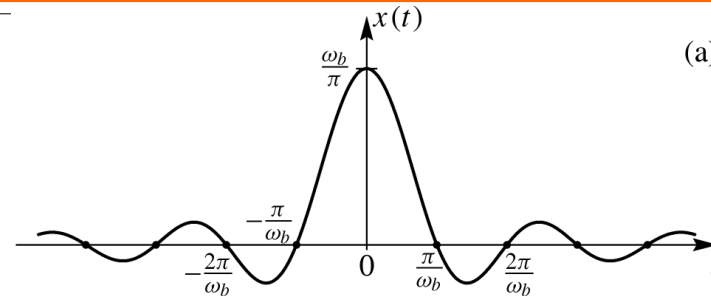

(a)

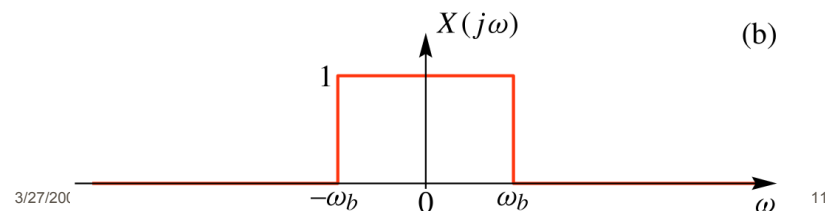



(b)

3/27/20

11

$$x(t) = \delta(t - t_0) \Leftrightarrow X(j\omega) = e^{-j\omega t_0}$$

$$t_0 = 0$$

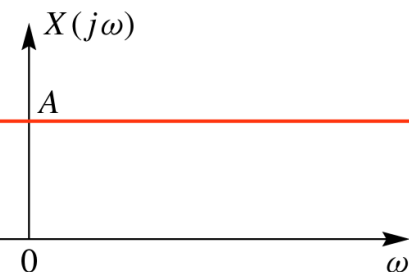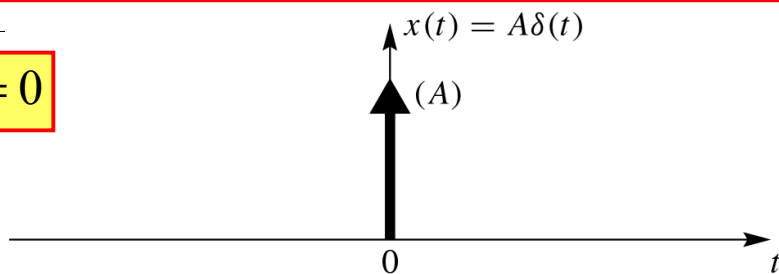

3/27/2

0

\omega

Table of Fourier Transforms

$$x(t) = e^{-at} u(t) \Leftrightarrow X(j\omega) = \frac{1}{a + j\omega}$$

$$x(t) = \begin{cases} 1 & |t| < T/2 \\ 0 & |t| > T/2 \end{cases} \Leftrightarrow X(j\omega) = \frac{\sin(\omega T/2)}{(\omega/2)}$$

$$x(t) = \frac{\sin(\omega_0 t)}{(\pi t)} \Leftrightarrow X(j\omega) = \begin{cases} 1 & |\omega| < \omega_0 \\ 0 & |\omega| > \omega_0 \end{cases}$$


$$x(t) = \delta(t - t_0) \Leftrightarrow X(j\omega) = e^{-j\omega t_0}$$

$$x(t) = e^{j\omega_0 t} \Leftrightarrow X(j\omega) = 2\pi\delta(\omega - \omega_0)$$

3/27/20

13

$$x(t) = \cos(\omega_0 t) \Leftrightarrow X(j\omega) = \pi\delta(\omega - \omega_0) + \pi\delta(\omega + \omega_0)$$

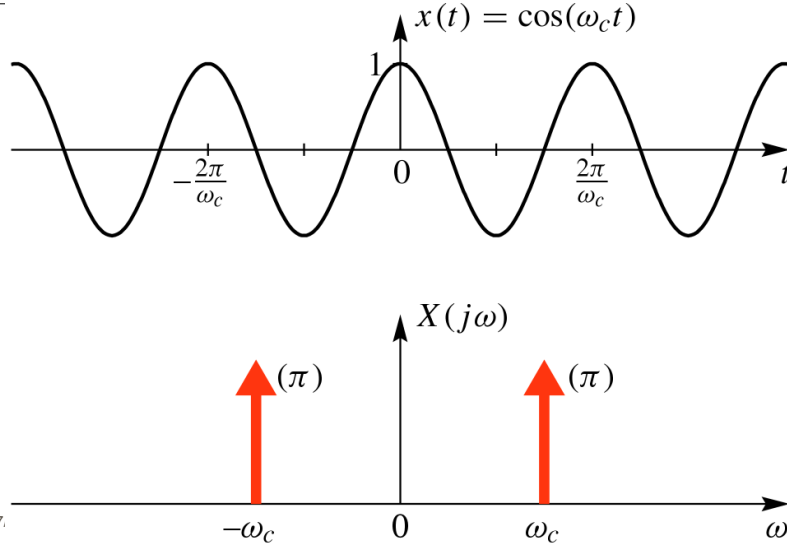

Fourier Transform of a General Periodic Signal


■ If $x(t)$ is periodic with period T_0 ,

$$x(t) = \sum_{k=-\infty}^{\infty} a_k e^{jk\omega_0 t} \quad a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-jk\omega_0 t} dt$$

Therefore, since $e^{jk\omega_0 t} \Leftrightarrow 2\pi\delta(\omega - k\omega_0)$

$$X(j\omega) = \sum_{k=-\infty}^{\infty} 2\pi a_k \delta(\omega - k\omega_0)$$

Square Wave Signal

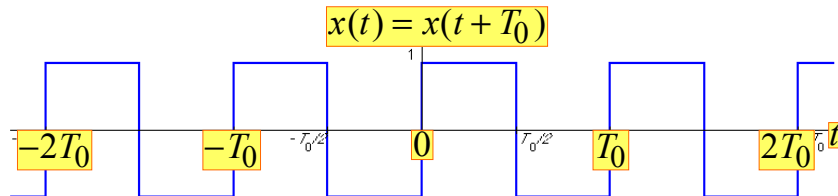

$$a_k = \frac{1}{T_0} \int_0^{T_0/2} (1) e^{-j\omega_0 k t} dt + \frac{1}{T_0} \int_{T_0/2}^{T_0} (-1) e^{-j\omega_0 k t} dt$$

$$a_k = \frac{e^{-j\omega_0 k t} \Big|_0^{T_0/2}}{-j\omega_0 k T_0} - \frac{e^{-j\omega_0 k t} \Big|_{T_0/2}^{T_0}}{-j\omega_0 k T_0} = \frac{1 - e^{-j\pi k}}{j\pi k}$$

Square Wave Fourier Transform

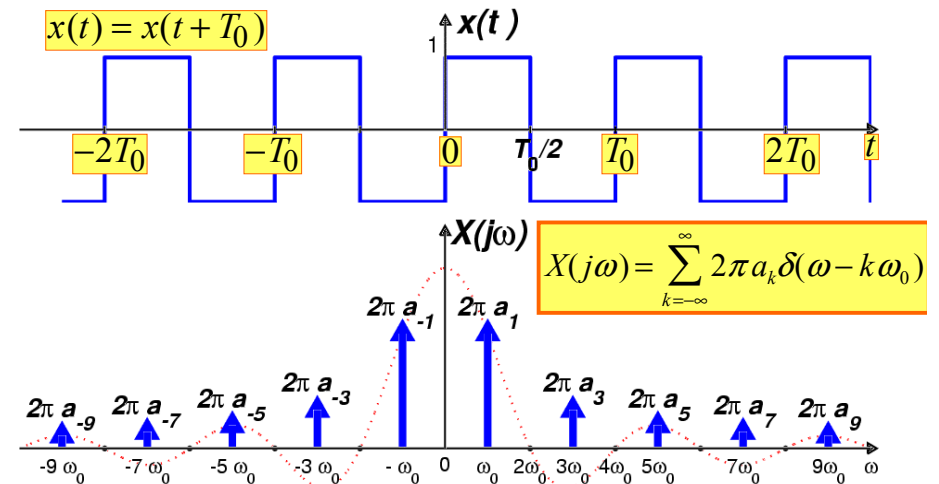


Table of Easy FT Properties

Linearity Property

$$ax_1(t) + bx_2(t) \Leftrightarrow aX_1(j\omega) + bX_2(j\omega)$$

Delay Property

$$x(t - t_d) \Leftrightarrow e^{-j\omega t_d} X(j\omega)$$

Frequency Shifting

$$x(t)e^{j\omega_0 t} \Leftrightarrow X(j(\omega - \omega_0))$$

Scaling

$$x(at) \Leftrightarrow \frac{1}{|a|} X(j\left(\frac{\omega}{a}\right))$$

3/27/2004

ECE-2025 Fall-03 jMc

18

Scaling Property

$$x(at) \Leftrightarrow \frac{1}{|a|} X(j\frac{\omega}{a})$$

$$\int_{-\infty}^{\infty} x(at)e^{-j\omega t} dt = \int_{-\infty}^{\infty} x(\lambda)e^{-j\omega(\lambda/a)} \frac{d\lambda}{|a|}$$

$$= \frac{1}{|a|} X(j\frac{\omega}{a})$$

$x(2t)$ shrinks; $\frac{1}{2} X(j\frac{\omega}{2})$ expands




3/27/2004

ECE-2025 Fall-03 jMc


19

Scaling Property

$$x(at) \Leftrightarrow \frac{1}{|a|} X(j\left(\frac{\omega}{a}\right))$$



$$x_2(t) = x_1(2t)$$



20

Uncertainty Principle

- Try to make $x(t)$ shorter
 - Then $X(j\omega)$ will get wider
 - Narrow pulses have wide bandwidth
- Try to make $X(j\omega)$ narrower
 - Then $x(t)$ will have longer duration
- **Cannot simultaneously reduce time duration and bandwidth**

3/27/2004

ECE-2025 Fall-03 jMc

21

Significant FT Properties

$$x(t) * h(t) \Leftrightarrow H(j\omega)X(j\omega)$$

$$x(t)p(t) \Leftrightarrow \frac{1}{2\pi} X(j\omega) * P(j\omega)$$

$$x(t)e^{j\omega_0 t} \Leftrightarrow X(j(\omega - \omega_0))$$


Differentiation Property

$$\frac{dx(t)}{dt} \Leftrightarrow (j\omega)X(j\omega)$$

3/27/2004

22

Convolution Property

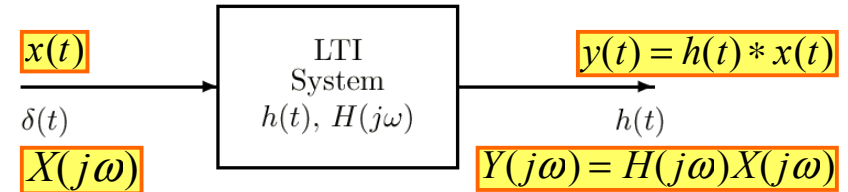

- Convolution in the time-domain

$$y(t) = h(t) * x(t) = \int_{-\infty}^{\infty} h(\tau)x(t - \tau)d\tau$$

corresponds to **MULTIPLICATION** in the frequency-domain

$$Y(j\omega) = H(j\omega)X(j\omega)$$

3/27/2004

ECE-2025 Fall-03 jMc

23

Convolution Example

- Bandlimited **Input** Signal
 - “sinc” function
- Ideal LPF (Lowpass Filter)
 - h(t)** is a “sinc”
- Output** is Bandlimited
 - Convolve “sincs”


3/27/2004

ECE-2025 Fall-03 jMc

24

Ideally Bandlimited Signal

$$x(t) = \frac{\sin(100\pi t)}{(\pi t)} \Leftrightarrow X(j\omega) = \begin{cases} 1 & |\omega| < 100\pi \\ 0 & |\omega| > 100\pi \end{cases}$$

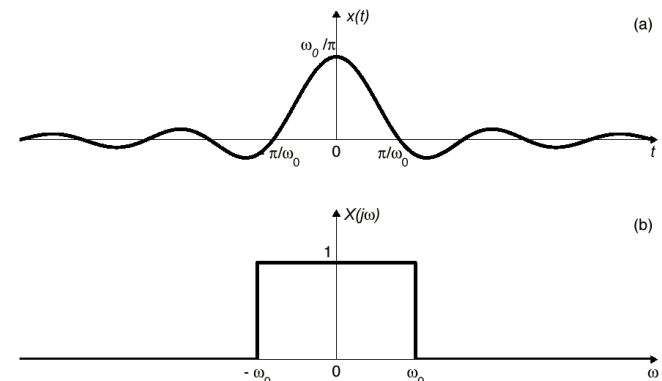


3/27/2004

25

Convolution Example

$$x(t) * h(t) \Leftrightarrow H(j\omega)X(j\omega)$$

$$\frac{\sin(100\pi t)}{\pi t} * \frac{\sin(200\pi t)}{\pi t} = \frac{\sin(100\pi t)}{\pi t}$$

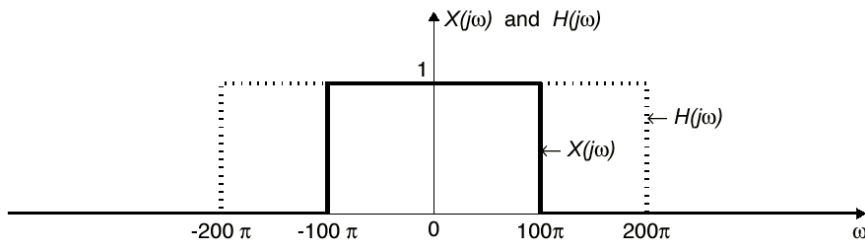

Cosine Input to LTI System

$$Y(j\omega) = H(j\omega)X(j\omega)$$

$$= H(j\omega)[\pi\delta(\omega - \omega_0) + \pi\delta(\omega + \omega_0)]$$

$$= H(j\omega_0)\pi\delta(\omega - \omega_0) + H(-j\omega_0)\pi\delta(\omega + \omega_0)$$


$$\begin{aligned} y(t) &= H(j\omega_0)\frac{1}{2}e^{j\omega_0 t} + H(-j\omega_0)\frac{1}{2}e^{-j\omega_0 t} \\ &= H(j\omega_0)\frac{1}{2}e^{j\omega_0 t} + H^*(j\omega_0)\frac{1}{2}e^{-j\omega_0 t} \\ &= |H(j\omega_0)|\cos(\omega_0 t + \angle H(j\omega_0)) \end{aligned}$$

3/27/2004

ECE-2025 Fall-03 jMc

27

Ideal Lowpass Filter

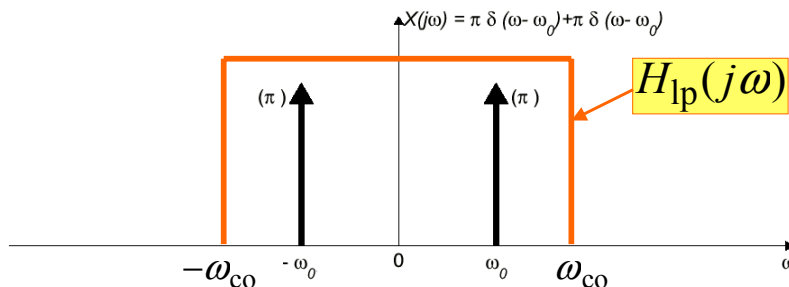

$$y(t) = x(t) \quad \text{if } \omega_0 < \omega_{co}$$


$$y(t) = 0 \quad \text{if } \omega_0 > \omega_{co}$$

3/27/2004


ECE-2025 Fall-03 jMc

28

Ideal Lowpass Filter

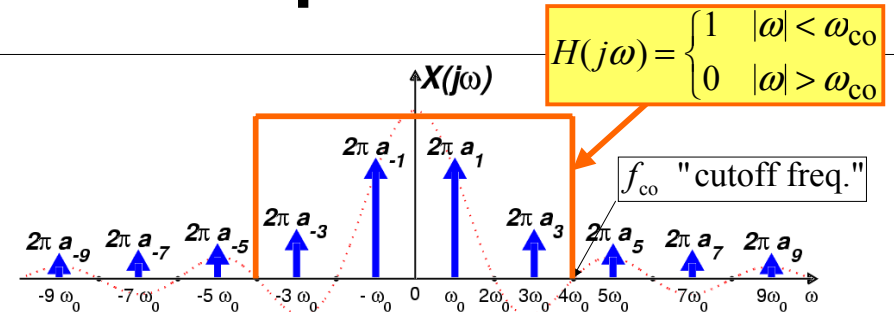


$$y(t) = \frac{4}{\pi} \sin(50\pi t) + \frac{4}{3\pi} \sin(150\pi t)$$

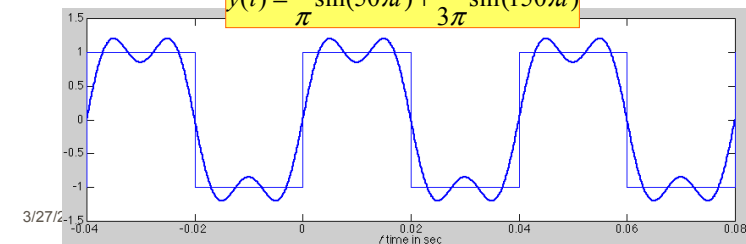

3/27/2004

29

Signal Multiplier (Modulator)

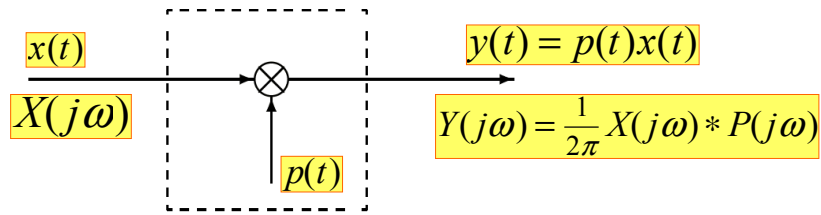

- Multiplication in the time-domain corresponds to convolution in the frequency-domain.

$$Y(j\omega) = \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\theta)P(j(\omega - \theta))d\theta$$

3/27/2004

30

Frequency Shifting Property


$$x(t)e^{j\omega_0 t} \Leftrightarrow X(j(\omega - \omega_0))$$

$$\int_{-\infty}^{\infty} e^{j\omega_0 t} x(t) e^{-j\omega t} dt = \int_{-\infty}^{\infty} x(t) e^{-j(\omega - \omega_0)t} dt = X(j(\omega - \omega_0))$$

$$y(t) = \frac{\sin 7t}{\pi t} e^{j\omega_0 t} \Leftrightarrow Y(j\omega) = \begin{cases} 1 & \omega_0 - 7 < \omega < \omega_0 + 7 \\ 0 & \text{elsewhere} \end{cases}$$

$$y(t) = x(t) \cos(\omega_0 t) \Leftrightarrow$$

$$Y(j\omega) = \frac{1}{2} X(j(\omega - \omega_0)) + \frac{1}{2} X(j(\omega + \omega_0))$$

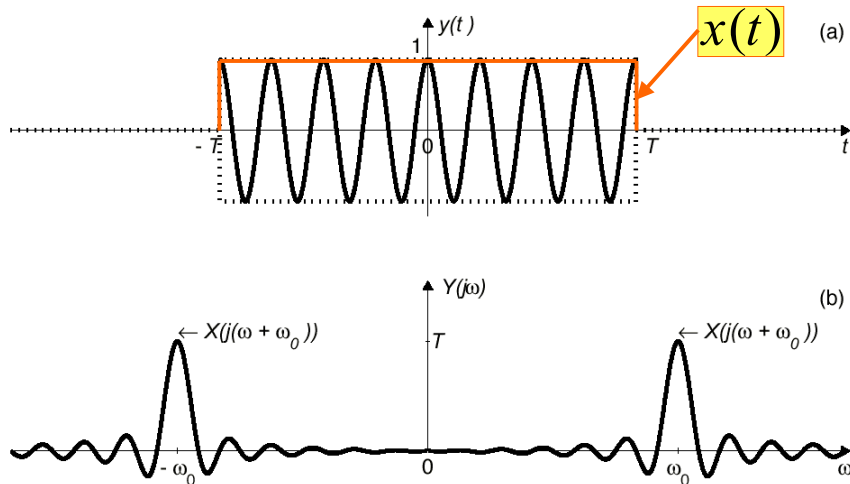

3/27/2004

ECE-2025 Fall-03 jMc

32

Differentiation Property

$$\frac{dx(t)}{dt} = \frac{d}{dt} \left(\frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega) e^{j\omega t} d\omega \right) = \frac{1}{2\pi} \int_{-\infty}^{\infty} (j\omega) X(j\omega) e^{j\omega t} d\omega$$

Multiply by $j\omega$

$$\frac{d}{dt} (e^{-at} u(t)) = -ae^{-at} u(t) + e^{-at} \delta(t) = \delta(t) - ae^{-at} u(t)$$

$$\Leftrightarrow \frac{j\omega}{a + j\omega}$$

3/27/2004

ECE-2025 Fall-03 jMc

33