

PROBLEM Fall-04-F.1:

In each of the following cases, *simplify the expression as much as possible.*


(a) $(t^2 - 5t + 1)\delta(t - 4) =$

(b) $u(t + 3) * \delta(t - 4) =$


(c) $\int_{-5}^5 \sin(\pi\tau/4)\delta(\tau + 3)d\tau =$

(d) $x[n] = 5 \cos(0.3\pi n - \pi/4) + \frac{5}{\sqrt{2}} \cos(0.3\pi n + \pi/2) =$

PROBLEM Fall-04-F.2:

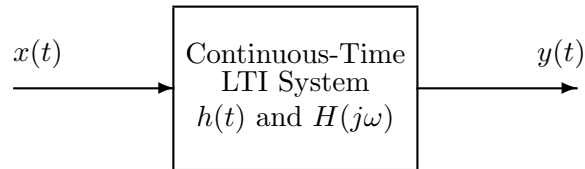

The periodic input to the above LTI system has the Fourier transform $X(j\omega)$ drawn below:

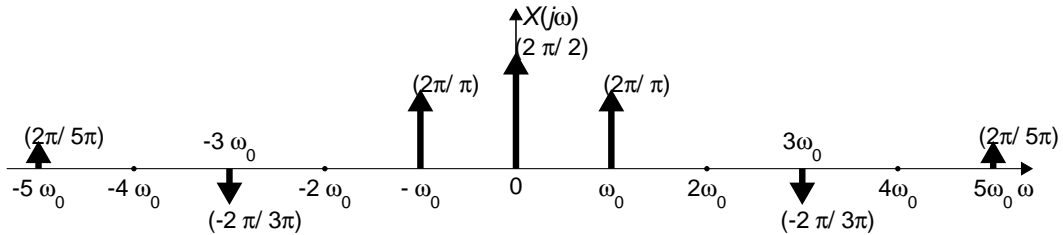


where the dark arrows denote impulses.

- (a) If the frequency response of the filter is given by

$$H(j\omega) = \begin{cases} e^{-j3\omega} & 9\omega_0/2 < |\omega| < 11\omega_0/2 \\ 0 & \text{otherwise} \end{cases}$$

determine $y(t)$. Your answer should be written as a real time function, i.e., there should be no j 's in your answer.


- (b) If $y(t) = \frac{dx(t)}{dt}$ sketch $Y(j\omega)$, the spectrum of $y(t)$, on the axes below.

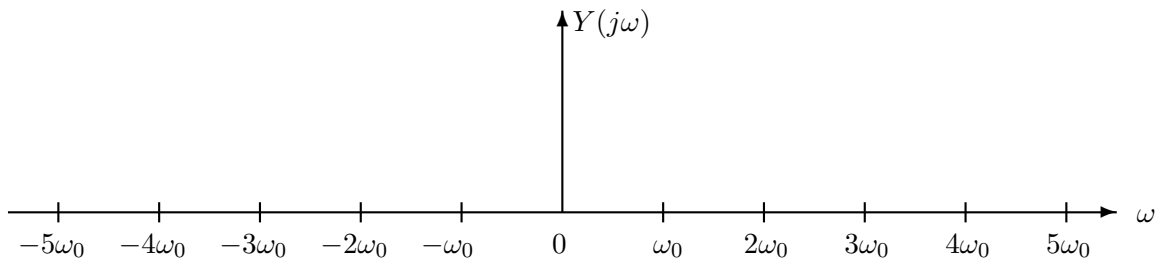

PROBLEM Fall-04-F.3:

The individual parts of this problem are independent.

- (a) If the output from an ideal C/D converter is $x[n] = A \cos(0.25\pi n)$, and the sampling rate is 10000 samples/sec, then determine two possible positive values of the input frequency of $x(t)$ that are less than 10000Hz.:

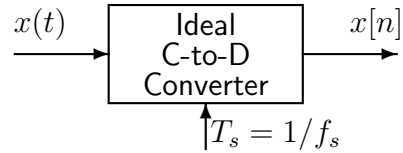

ANS 1: =

ANS 2: =

- (b) Suppose that a student writes the following MATLAB code to generate a sine wave:

```
nn = 0:44100;  
xx = (3/pi) * cos(pi*1.25*nn + pi/3);  
soundsc(xx,fsamp)
```

Although the sinusoid was not written to have a frequency of 1800 Hz, it is possible to play out the vector **xx** so that it sounds like a 1800 Hz tone. Determine the value of **fsamp** that should be used to play the vector **xx** as a 1800 Hz tone. Write your answer as an integer.


fsamp = Hz

- (c) Determine the Nyquist rate for sampling the signal $x(t)$ defined by:
 $x(t) = \Im\{e^{-j4000\pi t} + e^{j3000\pi t}\}.$

ANS = samples/sec.

PROBLEM Fall-04-F.4:

Consider the following system for discrete-time filtering of a continuous-time signal:

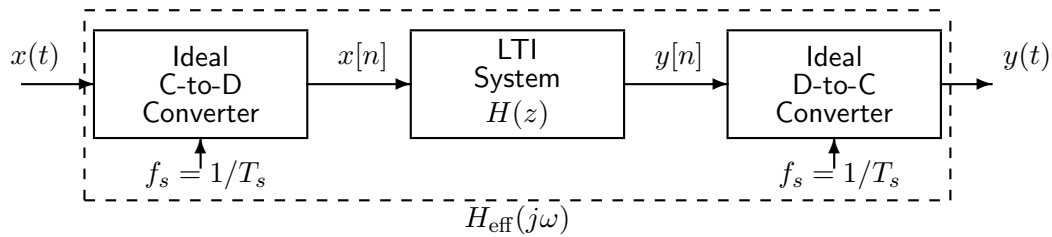


Assume that the discrete-time system is implemented using the MATLAB command:

```
yy=firfilt([0,0,1,0,-1],xx)
```

where **xx** is an array of samples of $x[n]$ and **yy** holds samples of $y[n]$.

- (a) Determine the frequency response of the discrete-time filter and plot its magnitude response versus frequency:

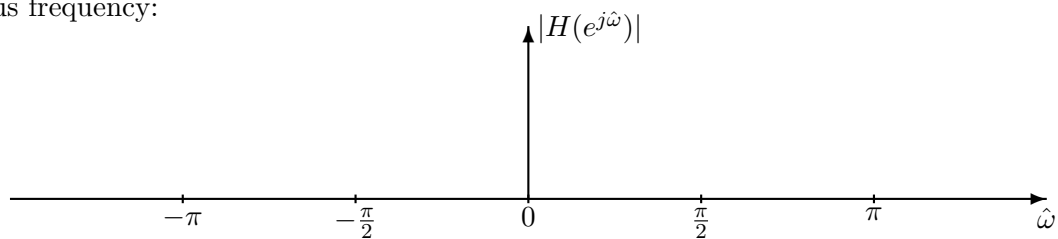

- (b) Assume that the input signal $x(t)$ is a sum of cosines:



$$x(t) = 9 \cos(600\pi t - \pi/3) + 3 \cos(800\pi t + \pi/4)$$

For this input signal, determine the output signal $y(t)$ when the sampling rate is $f_s = 600$ **samples/sec**. Your answer should be expressed as a sum of cosines.



PROBLEM Fall-04-F.5:

The parts of this problem are completely independent.



(a) Given that $y(t) = x(t) * h(t)$, find $h(t)$. $h(t) =$

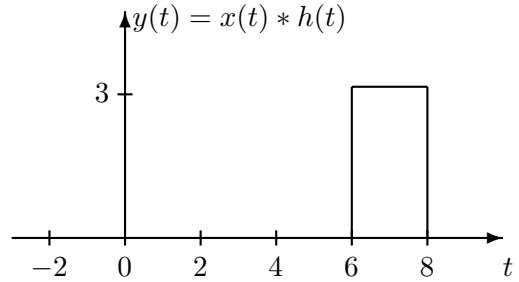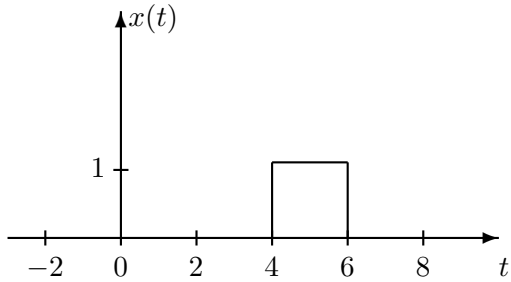

(b) If $h(t) = u(t)$, plot $y(t) = x(t) * h(t)$ on the graph on the right. *Be sure to label the y(t) axis.*

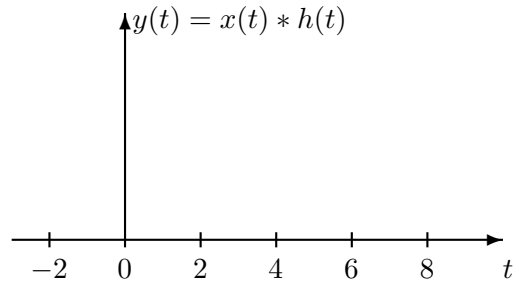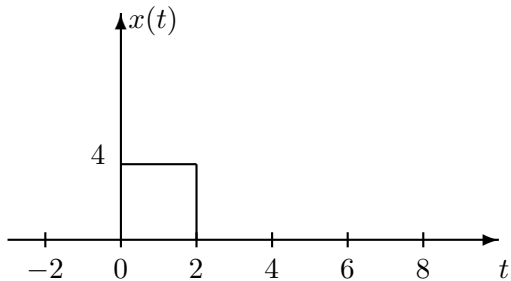

(c) If $h(t) = u(t - 1) - u(t - 3)$ and $y(t) = x(t) * h(t)$, determine the values of a , b , and c in the graph of $x(t)$ on the left, if $y(t)$ is given by the graph on the right.

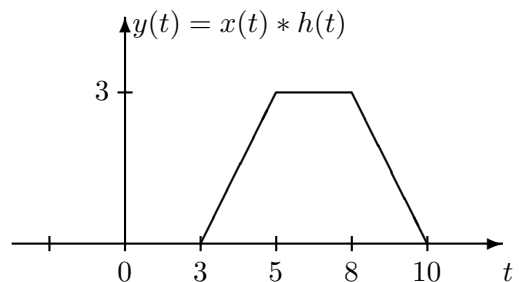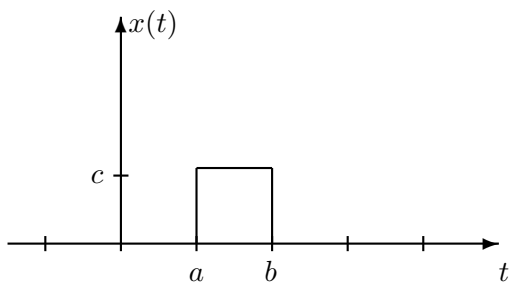


$a =$

$b =$

$c =$


PROBLEM Fall-04-F.6:

- (a) Consider the signal $x(t) = \frac{\sin(10\pi t)}{2\pi t}$. Make a carefully labeled sketch of $x(t)$ in the space below.

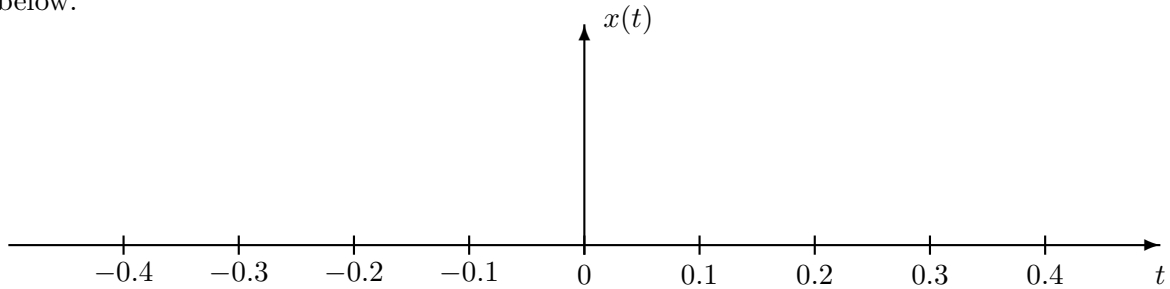

- (b) Determine the Fourier transform of $y(t) = x((t + 0.2)/2)$, using $x(t)$ from part (a).

- (c) Now consider the periodic signal $p(t)$ plotted below:

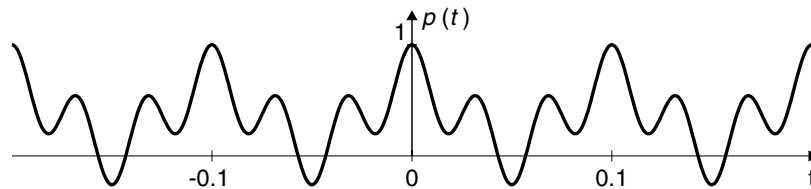


The Fourier series for this input can be simplified to the following form:

$$p(t) = \frac{1}{2} + \frac{2}{\pi} \cos(\omega_0 t) + \frac{2}{\pi} \cos(3\omega_0 t)$$

$\omega_0 =$ _____ rad/sec


First determine the value of ω_0 and put your result in the box. Then, **either** write an equation for $P(j\omega)$, the Fourier transform of $p(t)$, in the space below, **or** plot it on the axes below. **You must label your plot carefully to receive full credit.**

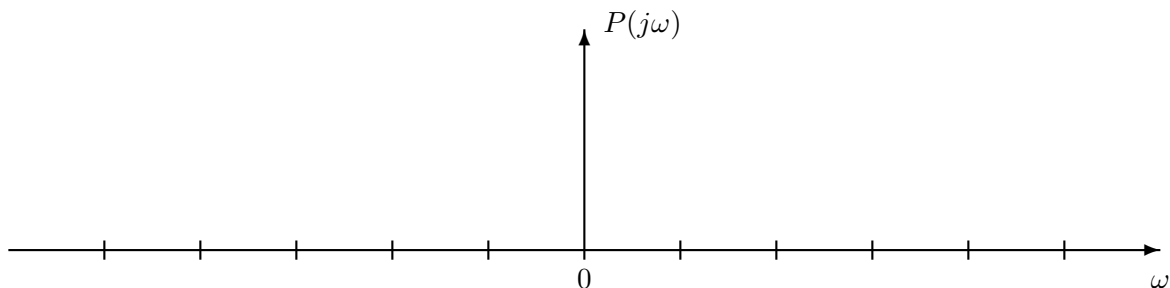


PROBLEM Fall-04-F.7:

The two parts of this problem are independent.


- (a) The system below is proposed as an alternative speech scrambler to the one in lab. Notice that the carrier signal is a sine instead of a cosine.

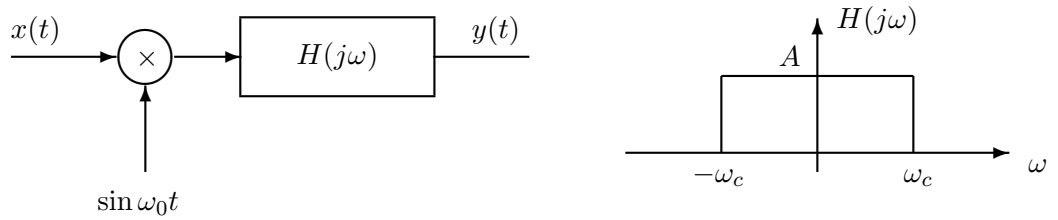


Assume that $x(t)$ has the spectrum, $X(j\omega)$ shown below

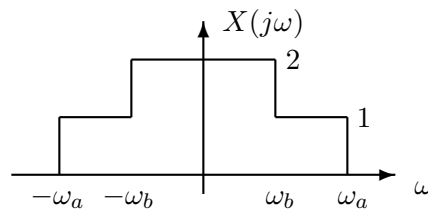



Sketch the spectrum, $Y(j\omega)$ of the output of the scrambler on the axes below if $\omega_a/(2\pi) = 10$ kHz, $\omega_b/(2\pi) = 4$ kHz, $\omega_c/(2\pi) = 15$ kHz, and $\omega_0/(2\pi) = 15$ kHz. Be sure to LABEL YOUR PLOT.

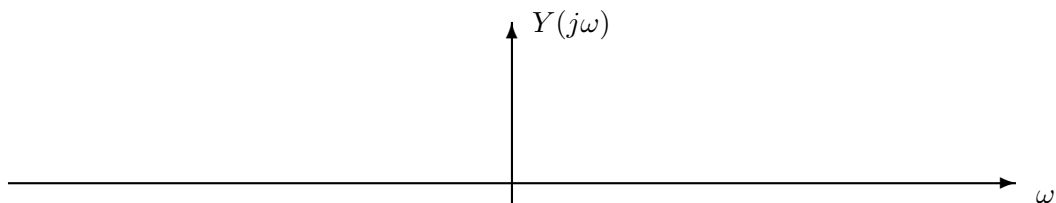

- (b) Signals are often repeatedly moved from one portion of the spectrum to another by repeated mixing. This process is called **heterodyning**. A simple example is the cascade of two mixers shown below.

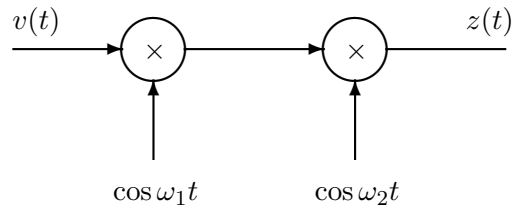

Let $f_1 = \omega_1/(2\pi) = 50$ kHz and $f_2 = \omega_2/(2\pi) = 20$ kHz. Sketch the spectrum $Z(j\omega)$ assuming that $V(j\omega)$ has the shape shown in the figure below.

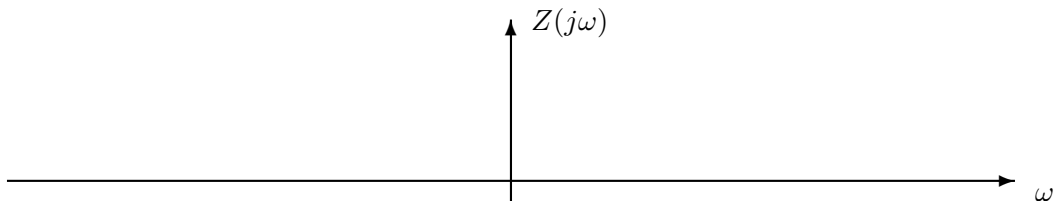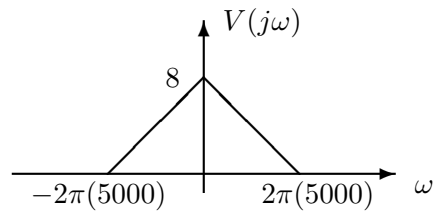

PROBLEM Fall-04-F.8:

A discrete-time system is defined by the following system function:

$$H(z) = H(z) = \frac{0.81 + z^{-2}}{(1 - 0.9z^{-1})(1 + 0.9z^{-1})}$$


- (a) Write down the difference equation that is satisfied by the input $x[n]$ and output $y[n]$ of the system.

- (b) Fill in numbers for the vectors **bb** and **aa** in the following MATLAB computation of the frequency response of the system:

```
bb=[           ];    aa=[           ];  
yy=filter(bb,aa,xx)
```

where **xx** is the input signal to be filtered.

- (c) Determine *all* the poles and zeros of $H(z)$ and plot them in the z -plane.

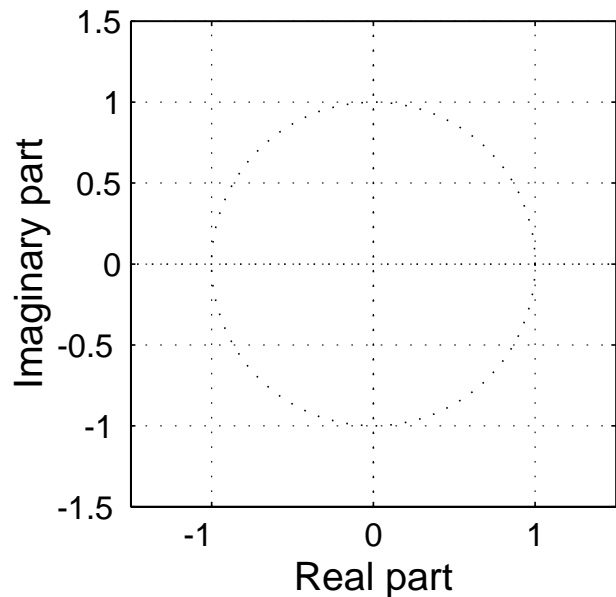

- (d) Make a sketch of the magnitude of the frequency response of the system over the range $-\pi < \hat{\omega} \leq \pi$. Indicate where the peaks and valleys are located, and also determine the height of the peaks and the valleys.

PROBLEM Fall-04-F.1:

In each of the following cases, *simplify the expression as much as possible.*

(a) $(t^2 - 5t + 1)\delta(t - 4) = \boxed{-3\delta(t-4)}$


(b) $u(t + 3) * \delta(t - 4) = \boxed{u(t-1)}$

(c) $\int_{-5}^5 \sin(\pi\tau/4)\delta(\tau + 3)d\tau = \boxed{-\frac{1}{\sqrt{2}}}$

(d) $x[n] = 5 \cos(0.3\pi n - \pi/4) + \frac{5}{\sqrt{2}} \cos(0.3\pi n + \pi/2) = \boxed{\frac{5}{\sqrt{2}} \cos(0.3\pi n)}$


$X_1 = 5e^{-j\pi/4}$

$X_2 = \frac{5}{\sqrt{2}}e^{j\pi/2}$

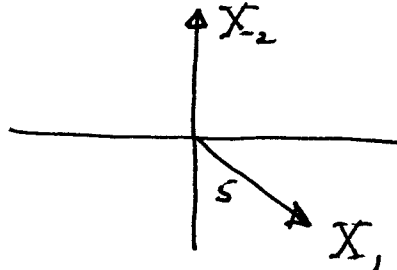


$X_1 + X_2 = \frac{5}{\sqrt{2}}e^{j\phi} = X$

PROBLEM Fall-04-F.2:

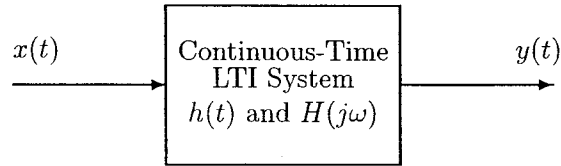

The periodic input to the above LTI system has the Fourier transform $X(j\omega)$ drawn below:

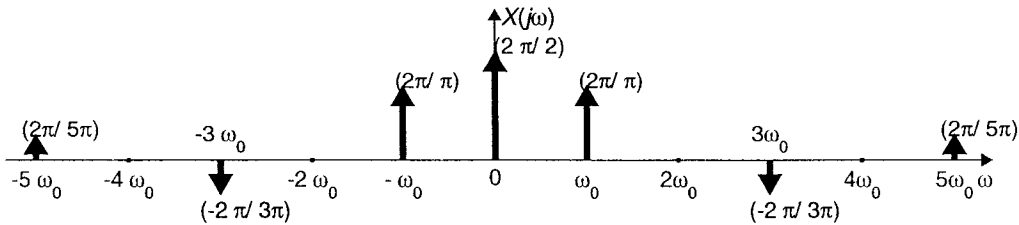

where the dark arrows denote impulses.


- (a) If the frequency response of the filter is given by

$$H(j\omega) = \begin{cases} e^{-j3\omega} & 9\omega_0/2 < |\omega| < 11\omega_0/2 \\ 0 & \text{otherwise} \end{cases}$$

determine $y(t)$. Your answer should be written as a real time function, i.e., there should be no j 's in your answer.

$$\begin{aligned} y(t) &= \frac{1}{5\pi} e^{-j15\omega_0 t} e^{j5\omega_0 t} + \frac{1}{5\pi} e^{j15\omega_0 t} e^{-j5\omega_0 t} \\ &= \frac{2}{5\pi} \cos(5\omega_0(t-3)) \end{aligned}$$


- (b) If $y(t) = \frac{dx(t)}{dt}$ sketch $Y(j\omega)$, the spectrum of $y(t)$, on the axes below.

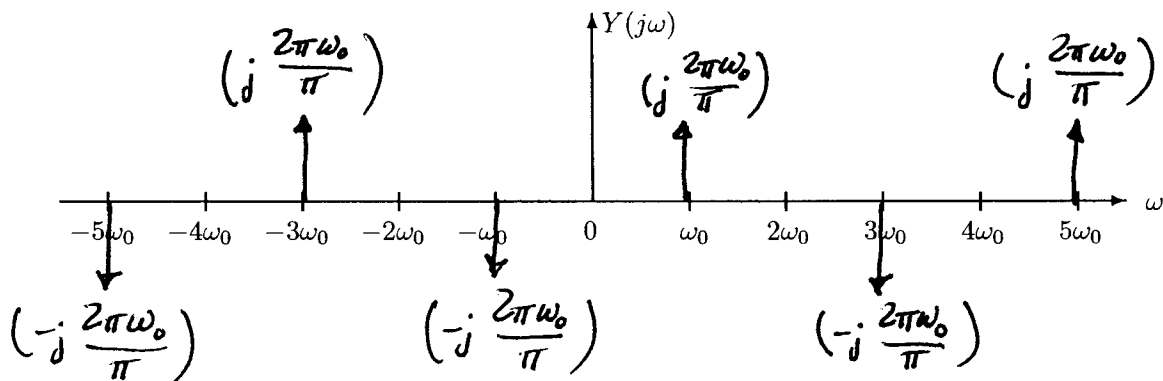

PROBLEM Fall-04-F.3:

The individual parts of this problem are independent.

- (a) If the output from an ideal C/D converter is $x[n] = A \cos(0.25\pi n)$, and the sampling rate is 10000 samples/sec, then determine two possible positive values of the input frequency of $x(t)$ that are less than 10000Hz.:

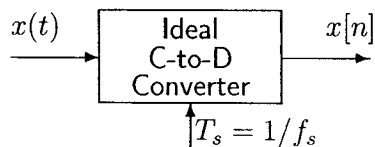

ANS 1: = $2,500\pi$ rad/sec. ANS 2: = $17,500\pi$ rad/sec.
 or 1,250 Hz. or 8,750 Hz.

- (b) Suppose that a student writes the following MATLAB code to generate a sine wave:

```
nn = 0:44100;
xx = (3/pi) * cos(pi*1.25*nn + pi/3);
soundsc(xx,fsamp)
```

Although the sinusoid was not written to have a frequency of 1800 Hz, it is possible to play out the vector xx so that it sounds like a 1800 Hz tone. Determine the value of fsamp that should be used to play the vector xx as a 1800 Hz tone. Write your answer as an integer.

$fsamp = 4,800$ Hz

$$\hat{\omega} = \omega T_s \qquad \frac{5\pi}{4} \equiv \frac{5\pi}{4} - 2\pi = -\frac{3\pi}{4}$$

$$\frac{3\pi}{4} = 2\pi(1800) T_s$$

$$\frac{1}{T_s} = \frac{14,400}{3} = 4,800$$


- (c) Determine the Nyquist rate for sampling the signal $x(t)$ defined by:

$$x(t) = \Im\{e^{-j4000\pi t} + e^{j3000\pi t}\}.$$

ANS = $4,000$ samples/sec. $\omega_b = 4000\pi$
 $f_b = 2000$ Hz

PROBLEM Fall-04-F.4:

Consider the following system for discrete-time filtering of a continuous-time signal:

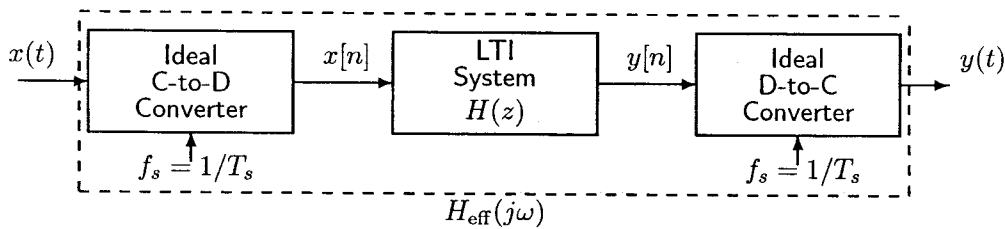


Assume that the discrete-time system is implemented using the MATLAB command:

```
yy=firfilt([0,0,1,0,-1],xx)
```

where xx is an array of samples of $x[n]$ and yy holds samples of $y[n]$.

- (a) Determine the frequency response of the discrete-time filter and plot its magnitude response versus frequency:

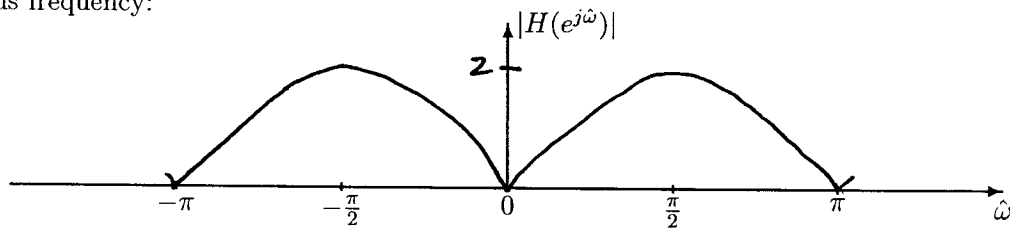

$$h[n] = \delta[n-2] - \delta[n-4]$$

$$H(e^{j\hat{\omega}}) = e^{-j2\hat{\omega}} - e^{-j4\hat{\omega}}$$

$$\boxed{H(e^{j\hat{\omega}}) = e^{-j3\hat{\omega}}(e^{j\hat{\omega}} - e^{-j\hat{\omega}})} \Rightarrow |H(e^{j\hat{\omega}})| = 2|\sin\hat{\omega}|$$

$$= j2\sin\hat{\omega}e^{-j3\hat{\omega}}$$

- (b) Assume that the input signal $x(t)$ is a sum of cosines:

$$x(t) = 9 \cos(600\pi t - \pi/3) + 3 \cos(800\pi t + \pi/4)$$

For this input signal, determine the ~~Fourier transform~~ of the output signal $y(t)$ when the sampling rate is $f_s = 600$ samples/sec. Determine the output signal $y[n]$. Your answer should be expressed as a sum of cosines.

$$x[n] = 9 \cos\left(\frac{600\pi}{600}n - \frac{\pi}{3}\right) + 3 \cos\left(\frac{800\pi}{600}n + \frac{\pi}{4}\right)$$

$$= 9 \cos\left(n\pi - \frac{\pi}{3}\right) + 3 \cos\left(\frac{4\pi}{3}n + \frac{\pi}{4}\right)$$

$$= 9 \cos\left(n\pi - \frac{\pi}{3}\right) + 3 \cos\left(\frac{2\pi}{3}n - \frac{\pi}{4}\right)$$

$$\Rightarrow y[n] = 0 + 3(2\sin\left(\frac{2\pi}{3}\right))\cos\left(\frac{2\pi}{3}n - \frac{\pi}{4} + \frac{\pi}{2}\right)$$

$$= 3\sqrt{3} \cos\left(\frac{2\pi}{3}n + \frac{\pi}{4}\right)$$



$$\boxed{y(t) = 3\sqrt{3} \cos(400\pi t + \frac{\pi}{4})}$$

PROBLEM Fall-04-F.5:



The parts of this problem are completely independent.

(a) Given that $y(t) = x(t) * h(t)$, find $h(t)$.



$$h(t) = 3\delta(t-2)$$

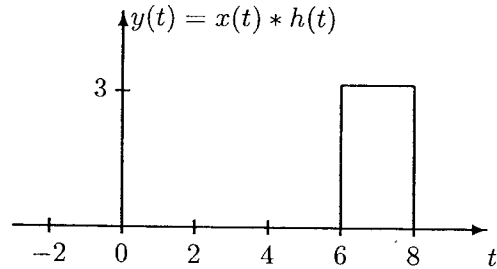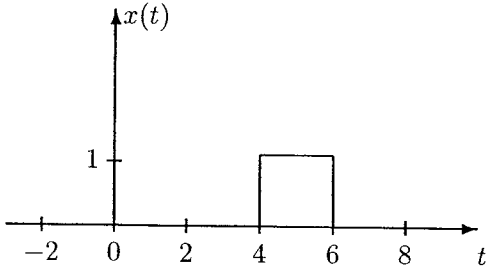

(b) If $h(t) = u(t)$, plot $y(t) = x(t) * h(t)$ on the graph on the right. Be sure to label the $y(t)$ axis.

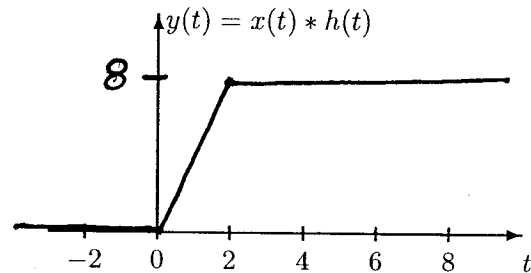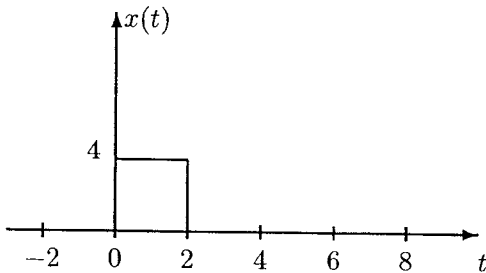

(c) If $h(t) = u(t-1) - u(t-3)$ and $y(t) = x(t) * h(t)$, determine the values of a , b , and c in the graph of $x(t)$ on the left, if $y(t)$ is given by the graph on the right.

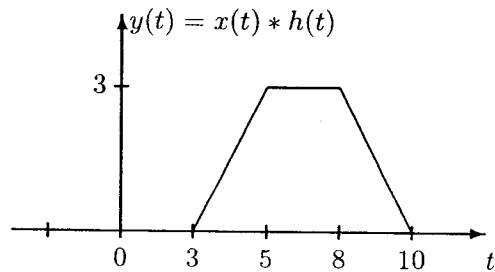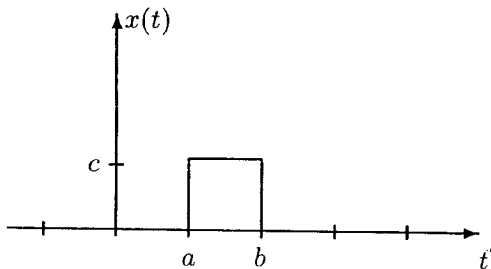


$$a = 2$$

$$b = 7$$

$$c = 1.5$$

PROBLEM Fall-04-F.6:

- (a) Consider the signal $x(t) = \frac{\sin(10\pi t)}{2\pi t}$. Make a carefully labeled sketch of $x(t)$ in the space below.

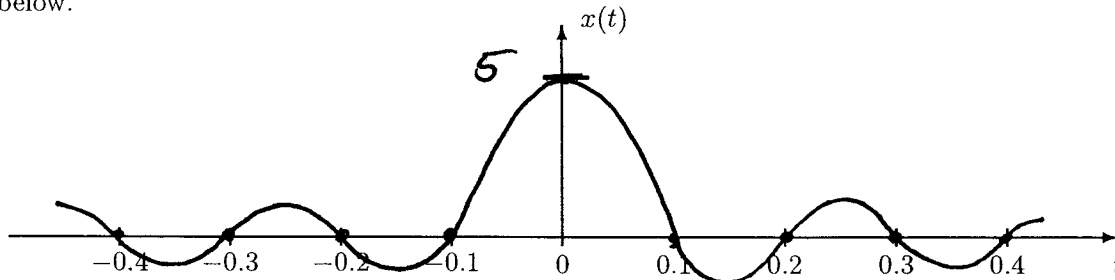


- (b) Determine the Fourier transform of $y(t) = x((t + 0.2)/2)$, using $x(t)$ from part (a).

TO GET $y(t)$ SCALE $x(t)$ WITH $a = \frac{1}{2}$, THEN SHIFT BY -0.2 .

$$Y(j\omega) = \begin{cases} e^{j(0.2\omega)} & , |\omega| < 5\pi \\ 0 & , |\omega| > 5\pi \end{cases}$$

- (c) Now consider the periodic signal $p(t)$ plotted below:

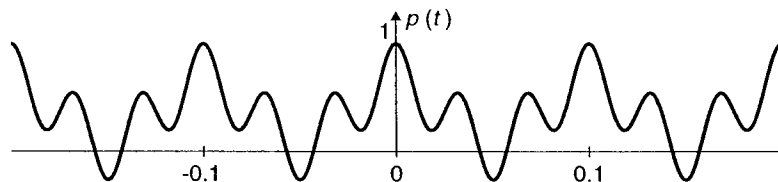


The Fourier series for this input can be simplified to the following form:

$$p(t) = \frac{1}{2} + \frac{2}{\pi} \cos(\omega_0 t) + \frac{2}{\pi} \cos(3\omega_0 t)$$

$\omega_0 = 20\pi \text{ rad/sec}$

First determine the value of ω_0 and put your result in the box. Then, **either** write an equation for $P(j\omega)$, the Fourier transform of $p(t)$, in the space below, or plot it on the axes below. You must label your plot carefully to receive full credit.


$$P(j\omega) = \pi \delta(\omega) + 2\delta(\omega - 20\pi) + 2\delta(\omega - 60\pi) + 2\delta(\omega + 20\pi) + 2\delta(\omega + 60\pi)$$

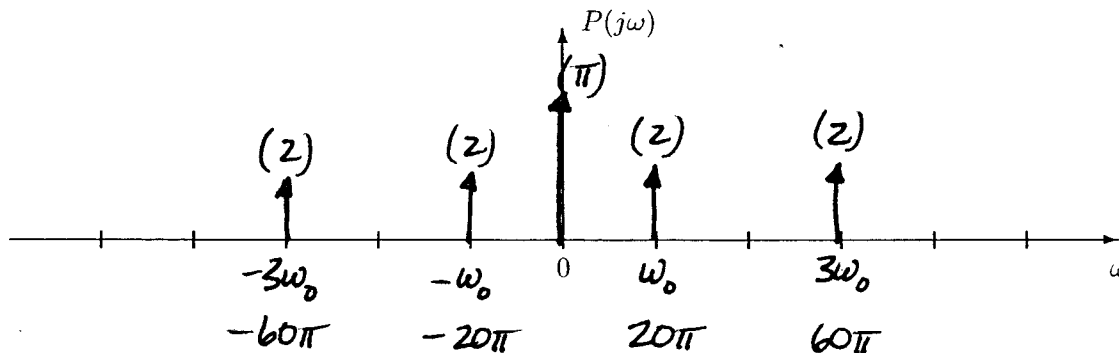


PROBLEM Fall-04-F.7:

The two parts of this problem are independent.


- (a) The system below is proposed as an alternative speech scrambler to the one in lab. Notice that the carrier signal is a sine instead of a cosine..

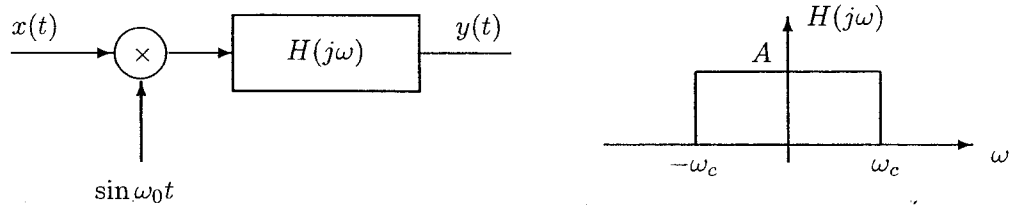


Assume that $x(t)$ has the spectrum, $X(j\omega)$ shown below

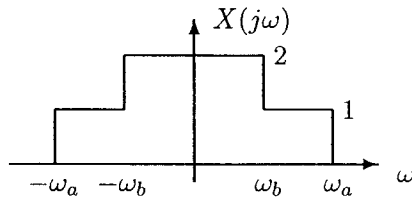



Sketch the spectrum, $Y(j\omega)$ of the output of the scrambler on the axes below if $\omega_a/(2\pi) = 10$ kHz, $\omega_b/(2\pi) = 4$ kHz, $\omega_c/(2\pi) = 15$ kHz, and $\omega_0/(2\pi) = 15$ kHz. Be sure to LABEL YOUR PLOT.

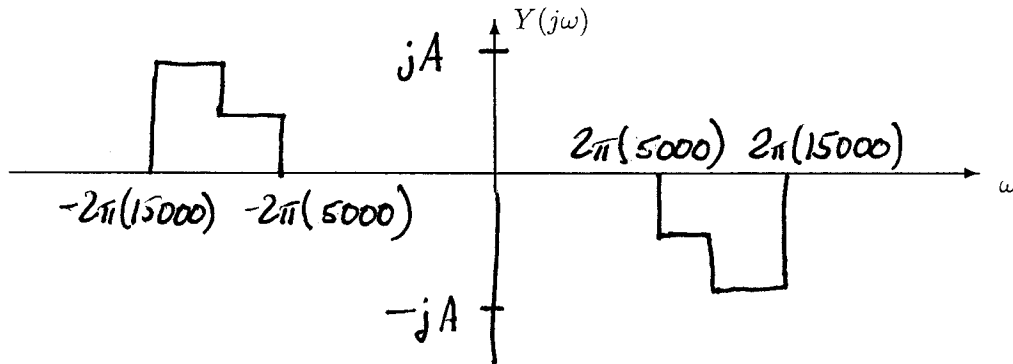

- (b) Signals are often repeatedly moved from one portion of the spectrum to another by repeated mixing. This process is called **heterodyning**. A simple example is the cascade of two mixers shown below.

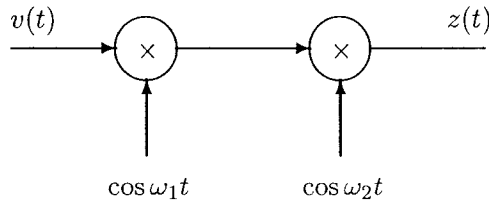

Let $f_1 = \omega_1/(2\pi) = 50$ kHz and $f_2 = \omega_2/(2\pi) = 20$ kHz. Sketch the spectrum $Z(j\omega)$ assuming that $V(j\omega)$ has the shape shown in the figure below.

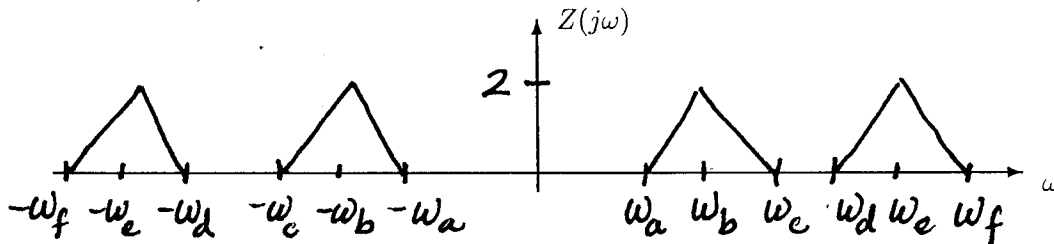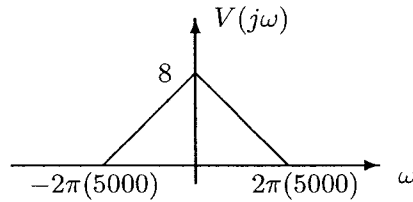

$$\omega_b = \omega_1 - \omega_2 = 2\pi(30,000)$$

$$\omega_e = \omega_1 + \omega_2 = 2\pi(70,000)$$

$$\omega_a = \omega_b - 2\pi(5000) = 2\pi(25,000)$$

$$\omega_c = \omega_b + 2\pi(5000) = 2\pi(35,000)$$

$$\omega_d = \omega_e - 2\pi(5000) = 2\pi(65,000)$$

$$\omega_f = \omega_e + 2\pi(5000) = 2\pi(75,000)$$

PROBLEM Fall-04-F.8:

A discrete-time system is defined by the following system function:

$$H(z) = \frac{0.81 + z^{-2}}{(1 - 0.9z^{-1})(1 + 0.9z^{-1})}$$

- (a) Write down the difference equation that is satisfied by the input $x[n]$ and output $y[n]$ of the system.


$$y[n] = .81y[n-2] + .81x[n] + x[n-2]$$

- (b) Fill in numbers for the vectors `bb` and `aa` in the following MATLAB computation of the frequency response of the system:

```
bb=[.81, 0, 1 ];    aa=[ 1  0  -.81];
yy=filter(bb,aa,xx)
```

where `xx` is the input signal to be filtered.

- (c) Determine *all* the poles and zeros of $H(z)$ and plot them in the z -plane.

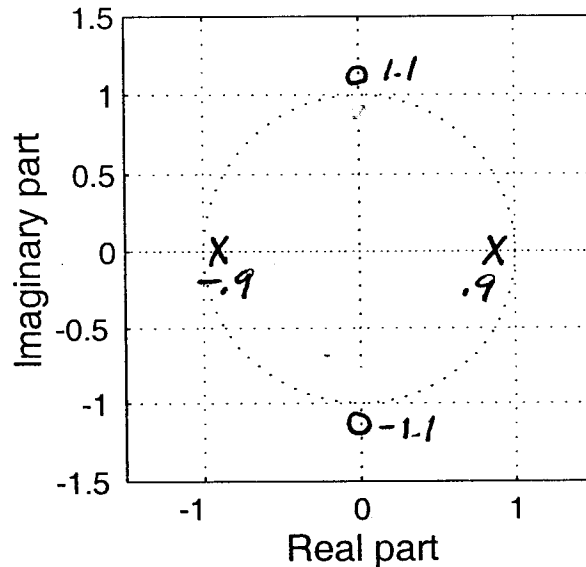

- (d) Make a sketch of the magnitude of the frequency response of the system over the range $-\pi < \omega \leq \pi$. Indicate where the peaks and valleys are located, and also determine the height of the peaks and the valleys.

