

PROBLEM Fall-04-Q.1.1:

Simplify the following complex-valued expressions. In each case reduce the answers to the **simple** numerical form requested. Let

$$U = -\frac{1}{\sqrt{2}} + j\frac{1}{\sqrt{2}}; \quad V = 2e^{-j\frac{2\pi}{3}}.$$

(a) Express $X = U + jV$ in rectangular form.

(b) Express $Y = UV^*$ in polar form.



(c) Express $Z = V - V^*$ in rectangular form.

(d) Determine $\Im\left\{\frac{V}{|U|}\right\}$.

(e) Express $\Re\{jUe^{-j3t}\}$ in the standard “cosine” form.

PROBLEM Fall-04-Q.1.2:

Two sinusoidal signals are plotted below. For each signal, determine the amplitude, phase (in radians) and frequency (in Hz).

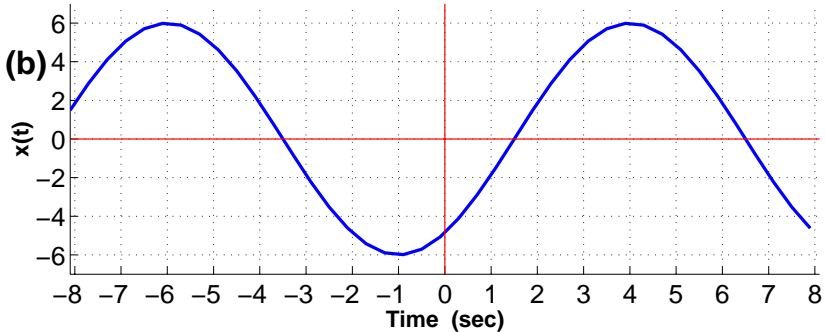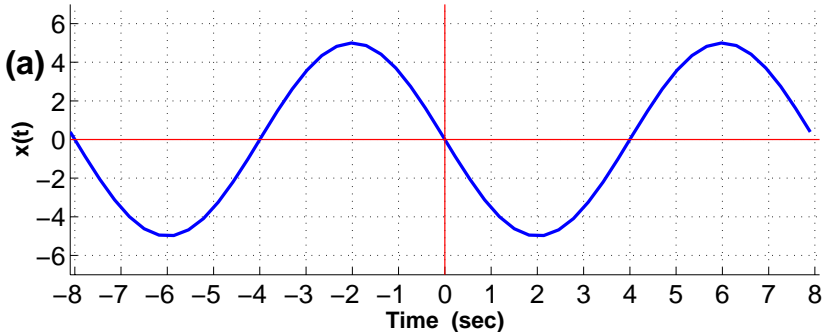

(a) Determine the amplitude, A_a , frequency in Hz., f_a , and phase, ϕ_a , of the upper sinusoid.

(b) Determine the amplitude, A_b , frequency in Hz., f_b , and phase, ϕ_b , of the lower sinusoid.

(c) What is the fundamental frequency (in Hz.) of the sum of these two sinusoids?

PROBLEM Fall-04-Q.1.3:

The following MATLAB code defines several signals that are then multiplied and summed:

```
tt = -10:0.001:10;  
xxe = 3*cos(100*pi*tt);  
xx1 = 20*cos( 6*pi*(tt - 1/5) );  
xx2 = 15*cos( 6*pi*tt + 2.1*pi );  
xx = xxe.*(xx1 + xx2);
```

- (a) If the signal $x_1(t)$ corresponds to the MATLAB vector **xx1**, determine the complex amplitude of $x_1(t)$.

- (b) If the signal $x(t)$ corresponds to the MATLAB vector **xx**, then it is possible to express $x(t)$ in the form

$$x(t) = A \cos(\omega_1 t) \cos(\omega_2 t + \phi)$$

Determine the numerical values of A , ω_1 , ω_2 and ϕ . *Hint:* Use phasor addition.

$$A = \underline{\hspace{2cm}}$$

$$\omega_1 = \underline{\hspace{2cm}}$$

$$\omega_2 = \underline{\hspace{2cm}}$$

$$\phi = \underline{\hspace{2cm}}$$

PROBLEM Fall-04-Q.1.4:

Let

$$x_1(t) = 4 \cos\left(5\pi t + \frac{\pi}{4}\right); \quad x_2(t) = \Im\{j2e^{j5\pi t}\}$$

- (a) Plot the spectrum of $x_1(t)$. Be sure to label all of the frequencies and complex amplitudes.
- (b) Plot the spectrum of $x_2(t)$. Be sure to label all of the frequencies and complex amplitudes.
- (c) Plot the spectrum of $y(t) = x_1(t)x_2(t)$. Be sure to label all of the frequencies and complex amplitudes.
- (d) Now let $z(t) = x_1(t) \cos(5\pi t + \phi)$. Determine **all** possible values of ϕ for which the DC value of $z(t)$ will be zero.

PROBLEM Fall-04-Q.1.1:

Simplify the following complex-valued expressions. In each case reduce the answers to the simple numerical form requested. Let

$$U = -\frac{1}{\sqrt{2}} + j\frac{1}{\sqrt{2}}; \quad V = 2e^{-j\frac{2\pi}{3}} = -1 - j\sqrt{3}$$

$$= e^{j\frac{3\pi}{4}}$$

(a) Express $X = U + jV$ in rectangular form.

$$= \left(-\frac{1}{\sqrt{2}} + j\frac{1}{\sqrt{2}}\right) + j(-1 - j\sqrt{3})$$

$$= \boxed{\left(-\frac{1}{\sqrt{2}} + \sqrt{3}\right) - j\left(1 - \frac{1}{\sqrt{2}}\right)}$$

(b) Express $Y = UV^*$ in polar form.

$$= \left(e^{j\frac{3\pi}{4}}\right)\left(2e^{+j\frac{2\pi}{3}}\right) = \boxed{2e^{j7\pi/12}} \text{ or } 2e^{-j7\pi/12}$$

(c) Express $Z = V - V^*$ in rectangular form.

$$= (-1 - j\sqrt{3}) - (-1 + j\sqrt{3}) = -1 - j\sqrt{3} + 1 - j\sqrt{3}$$

$$\boxed{Z = -j2\sqrt{3}}$$

(d) Determine $\Im\left\{\frac{V}{|V|}\right\} = \Im\left\{\frac{-1 - j\sqrt{3}}{1}\right\} = \boxed{-\sqrt{3}}$



(e) Express $\Re\{jUe^{-j3t}\}$ in the standard "cosine" form.

$$\Re\left\{e^{j\frac{\pi}{2}} \cdot e^{j\frac{3\pi}{4}} \cdot e^{-j3t}\right\} = \Re\left\{e^{j\frac{5\pi}{4}} e^{-j3t}\right\}$$

$$= \Re\left\{e^{-j\frac{3\pi}{4}} e^{-j3t}\right\} = \boxed{\cos\left(3t + \frac{3\pi}{4}\right)}$$

PROBLEM Fall-04-Q.1.2:

Two sinusoidal signals are plotted below. For each signal, determine the amplitude, phase (in radians) and frequency (in Hz).

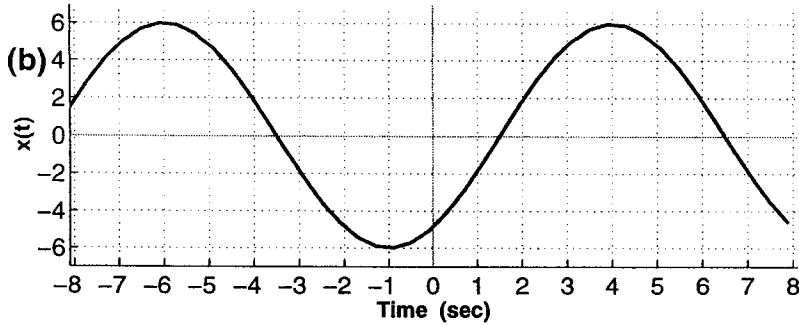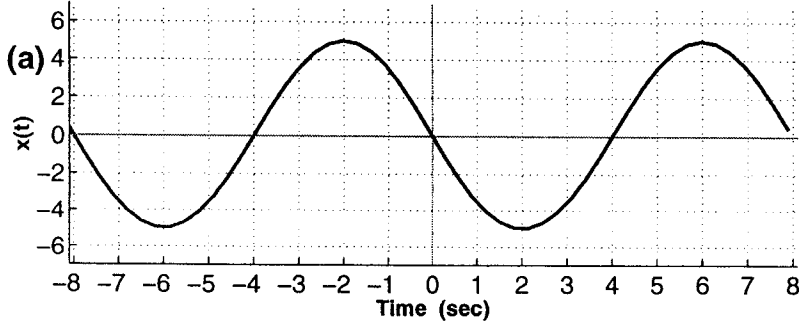

- (a) Determine the amplitude, A_a , frequency in Hz., f_a , and phase, ϕ_a , of the upper sinusoid.

$$A_a = 5$$

$$t_d = -2 \text{ sec.}$$

$$T_a = 8 \text{ sec.}$$

$$\phi_a = -\omega_a t_d = -\left(\frac{2\pi}{8}\right)(-2) = +\frac{\pi}{2} \text{ rad.}$$

$$f_a = \frac{1}{8} \text{ Hz.}$$

- (b) Determine the amplitude, A_b , frequency in Hz., f_b , and phase, ϕ_b , of the lower sinusoid.

$$A_b = 6$$

$$t_d = 4 \text{ sec.}$$

$$T_b = 10 \text{ sec.}$$

$$\phi_b = -\omega_b t_d = -\left(\frac{2\pi}{10}\right)(4) = -\frac{4\pi}{5} \text{ rad.}$$

$$f_b = \frac{1}{10} \text{ Hz.}$$

- (c) What is the fundamental frequency (in Hz.) of the sum of these two sinusoids?

$$f_a = \frac{5}{40} \text{ Hz.} \quad f_b = \frac{4}{40} \text{ Hz.} \quad \Rightarrow \quad f_0 = \frac{1}{40} \text{ Hz.}$$

PROBLEM Fall-04-Q.1.3:

The following MATLAB code defines several signals that are then multiplied and summed:

```
tt = -10:0.001:10;  
xxe = 3*cos(100*pi*tt);  
xx1 = 20*cos( 6*pi*(tt - 1/5) );  
xx2 = 15*cos( 6*pi*tt + 2.1*pi );  
xx = xxe.*(xx1 + xx2);
```

- (a) If the signal $x_1(t)$ corresponds to the MATLAB vector $xx1$, determine the complex amplitude of $x_1(t)$.

$$X_1 = 20e^{-j\frac{6\pi}{5}}$$

- (b) If the signal $x(t)$ corresponds to the MATLAB vector xx , then it is possible to express $x(t)$ in the form

$$x(t) = A \cos(\omega_1 t) \cos(\omega_2 t + \phi)$$

Determine the numerical values of A , ω_1 , ω_2 and ϕ . *Hint:* Use phasor addition.

$$A = (3)(16.5024) = 49.5072$$

$$\omega_1 = 100\pi \text{ rad/s}$$

$$\omega_2 = 6\pi \text{ rad/s}$$

$$\phi = 1.6871 \text{ rad.}$$

$$x(t) = 3 \cos(100\pi t) \left[20 \cos\left(6\pi t - \frac{6\pi}{5}\right) + 15 \cos\left(6\pi t + \frac{\pi}{10}\right) \right]$$

$$X_1 = 20e^{-j\frac{6\pi}{5}}$$

$$X_2 = 15e^{j\frac{\pi}{10}}$$

$$X_1 + X_2 = 16.5024e^{j(1.6871)}$$

PROBLEM Fall-04-Q.1.4:

Let

$$x_1(t) = 4 \cos(5\pi t + \frac{\pi}{4}); \quad x_2(t) = \Im\{j2e^{j5\pi t}\}$$


- (a) Plot the spectrum of $x_1(t)$. Be sure to label all of the frequencies and complex amplitudes.



- (b) Plot the spectrum of $x_2(t)$. Be sure to label all of the frequencies and complex amplitudes.



- (c) Plot the spectrum of $y(t) = x_1(t)x_2(t)$. Be sure to label all of the frequencies and complex amplitudes.

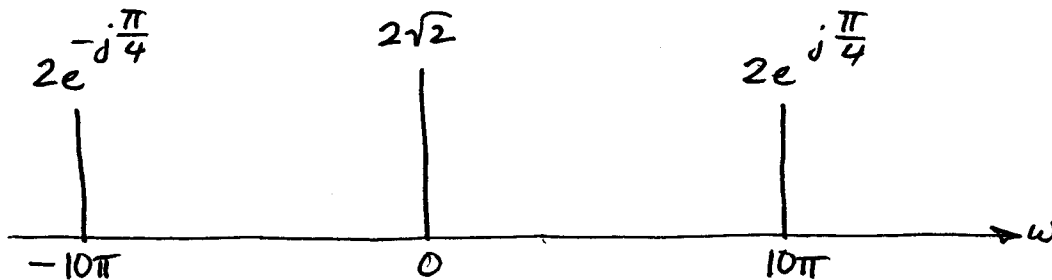

- (d) Now let $z(t) = x_1(t) \cos(5\pi t + \phi)$. Determine all possible values of ϕ for which the DC value of $z(t)$ will be zero.

$$\begin{aligned} z(t) &= 4 \cos(5\pi t + \frac{\pi}{4}) \cos(5\pi t + \phi) \\ &= (e^{j\frac{\pi}{4}} e^{j5\pi t} + e^{-j\frac{\pi}{4}} e^{-j5\pi t}) (e^{j\phi} e^{j5\pi t} + e^{-j\phi} e^{-j5\pi t}) \\ &= e^{j(\phi + \frac{\pi}{4})} e^{j10\pi t} + e^{-j\frac{\pi}{4}} e^{-j10\pi t} + \underbrace{(e^{j(\phi - \frac{\pi}{4})} + e^{-j(\phi - \frac{\pi}{4})})}_{\text{DC VALUE}} \end{aligned}$$

∴ WE WANT

$$2 \cos(\phi - \frac{\pi}{4}) = 0 \Rightarrow \phi = -\frac{\pi}{4} + \pi k, \quad k = \text{INTEGER}$$