

ECE-2025

Spring-2005

Lecture 13

Digital Filtering of Analog Signals

28-Feb-05

Info: Web-CT, Lab, HW

- Quiz #2 on 4-March (Friday)
 - Coverage: HW #4, #5, #6, and #7
 - Solution to #7 will posted Thurs evening
- Quiz Review Session:
 - 6pm, Physics L4

- Lab #7 is posted

2/25/2005

ECE-2025 Spring-05 jMc

2

Perseverance

- **A** lowly virtue whereby mediocrity achieves a glorious success...A. Bierce

- **B**ear in mind, if you are going to amount to anything, that your success does not depend upon the brilliance and the impetuosity with which you take hold, but upon the ever lasting and sanctified bull doggedness with which you hang on after you have taken hold...Dr. A. B. Meldrum

Lecture

2/25/2005

ECE-2025 Spring-05 jMc

3

READING ASSIGNMENTS

- This Lecture:
 - Chapter 6, Sections 6-6, 6-7 & 6-8

- Other Reading:
 - Recitation: Chapter 6
 - FREQUENCY RESPONSE EXAMPLES
 - Next Lecture: Chapter 7


2/25/2005

ECE-2025 Spring-05 jMc

4

LECTURE OBJECTIVES

- Two Domains: Time & Frequency
- Track the spectrum of $x[n]$ thru an FIR Filter: **Sinusoid-IN gives Sinusoid-OUT**
- UNIFICATION:** How does Frequency Response affect $x(t)$ to produce $y(t)$?

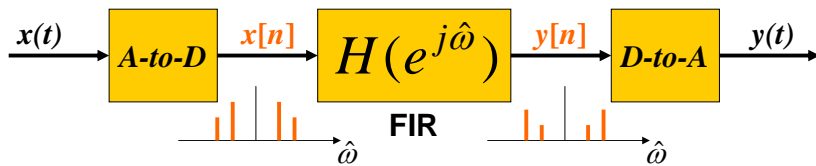

2/25/2005

ECE-2025 Spring-05 jMc

5

TIME & FREQUENCY

$$y[n] = \sum_{k=0}^M b_k x[n-k] = \sum_{k=0}^M h[k] x[n-k]$$

FIR DIFFERENCE EQUATION is the TIME-DOMAIN

$$H(e^{j\hat{\omega}}) = \sum_{k=0}^M h[k] e^{-j\hat{\omega}k}$$

$$H(e^{j\hat{\omega}}) = h[0] + h[1]e^{-j\hat{\omega}} + h[2]e^{-j2\hat{\omega}} + h[3]e^{-j3\hat{\omega}} + \dots$$



2/25/2005

ECE-2025 Spring-05 jMc

6

Ex: DELAY by 2 SYSTEM

Find $h[n]$ and $H(e^{j\hat{\omega}})$ for $y[n] = x[n-2]$

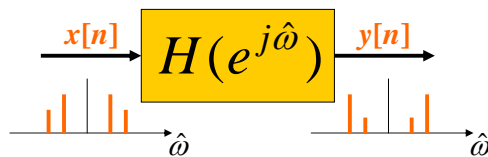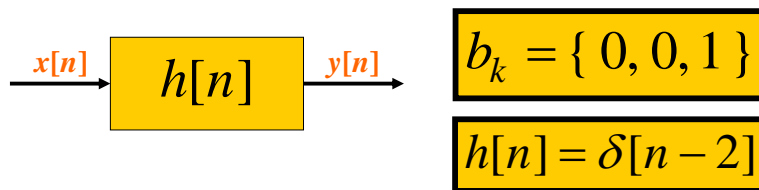


2/25/2005

ECE-2025 Spring-05 jMc

7

DELAY by 2 SYSTEM

Find $h[n]$ and $H(e^{j\hat{\omega}})$ for $y[n] = x[n-2]$

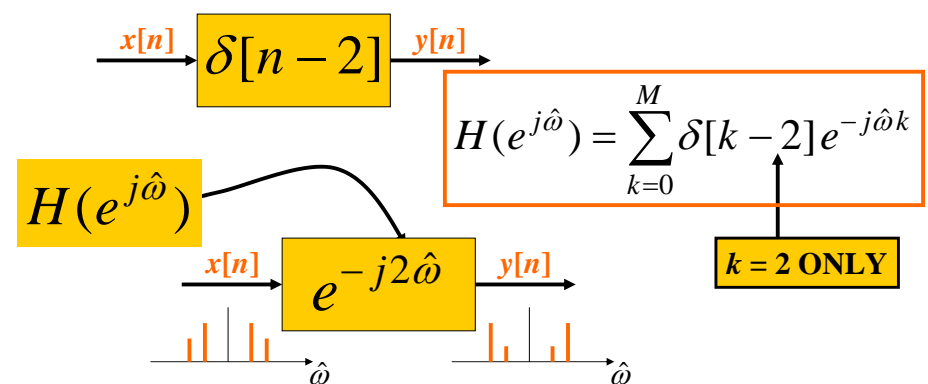

2/25/2005

ECE-2025 Spring-05 jMc

8

GENERAL DELAY PROPERTY

Find $h[n]$ and $H(e^{j\hat{\omega}})$ for $y[n] = x[n - n_d]$


$$h[n] = \delta[n - n_d]$$

$$H(e^{j\hat{\omega}}) = \sum_{k=0}^M \delta[k - n_d] e^{-j\hat{\omega}k} = e^{-j\hat{\omega}n_d}$$


ONLY ONE non-ZERO TERM for k at $k = n_d$

FREQ DOMAIN --> TIME ??

- START with $H(e^{j\hat{\omega}})$ and find $h[n]$ or b_k



$$H(e^{j\hat{\omega}}) = 7e^{-j2\hat{\omega}} \cos(\hat{\omega})$$

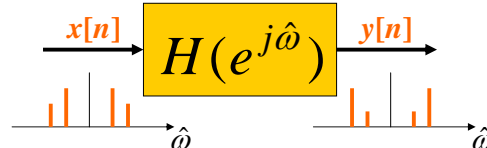

FREQ DOMAIN --> TIME

$$H(e^{j\hat{\omega}}) = 7e^{-j2\hat{\omega}} \cos(\hat{\omega}) \quad \text{EULER's Formula}$$

$$= 7e^{-j2\hat{\omega}} (0.5e^{j\hat{\omega}} + 0.5e^{-j\hat{\omega}})$$


$$= (3.5e^{-j\hat{\omega}} + 3.5e^{-j3\hat{\omega}})$$

$$h[n] = 3.5\delta[n - 1] + 3.5\delta[n - 3]$$

$$b_k = \{ 0, 3.5, 0, 3.5 \}$$

PREVIOUS LECTURE REVIEW

- SINUSOIDAL INPUT SIGNAL
 - OUTPUT has SAME FREQUENCY
 - DIFFERENT Amplitude and Phase
- FREQUENCY RESPONSE of FIR
 - MAGNITUDE vs. Frequency
 - PHASE vs. Freq
 - PLOTTING

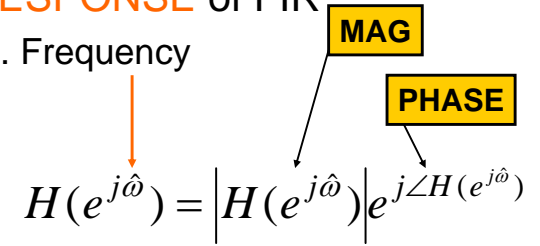

FREQ. RESPONSE PLOTS


- DENSE GRID (**ww**) from $-\pi$ to $+\pi$
 - **ww** = `-pi:(pi/100):pi;`
- **HH** = `freqz(bb,1,ww)`
 - VECTOR **bb** contains Filter Coefficients
 - DSP-First: **HH** = `freesz(bb,1,ww)`

$$H(e^{j\hat{\omega}}) = \sum_{k=0}^M b_k e^{-j\hat{\omega}k}$$

2/25/2005

ECE-2025 Spring-05 jMc

13

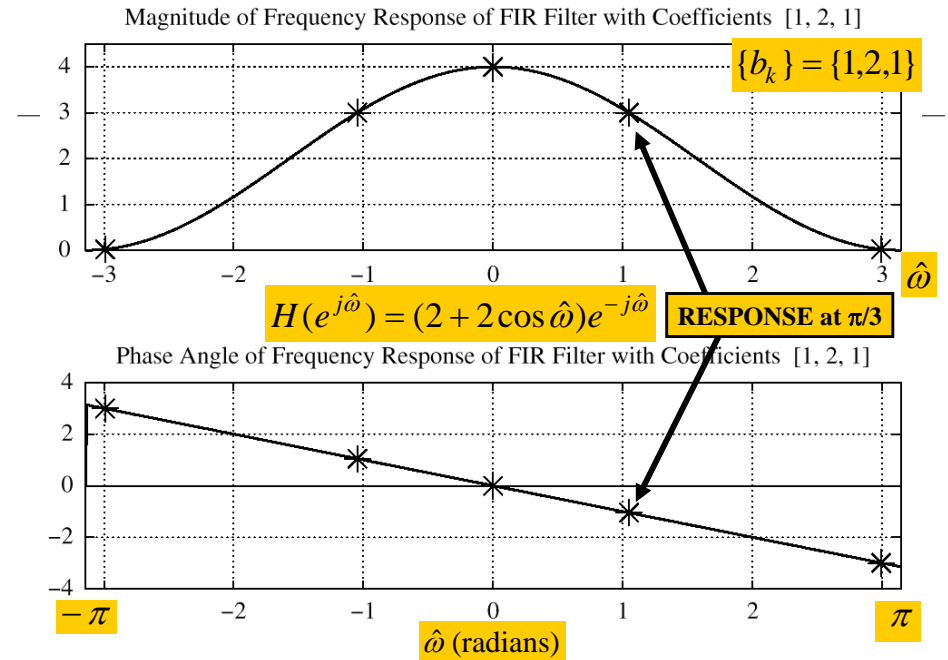

EX: COSINE INPUT (ans-2)

Find $y[n]$ when $x[n] = 2 \cos(\frac{\pi}{3}n + \frac{\pi}{4})$

$$H(e^{j\hat{\omega}}) = (2 + 2 \cos \hat{\omega})e^{-j\hat{\omega}}$$

$$y_1[n] = H(e^{j\pi/3})e^{j(\pi n/3 + \pi/4)} = 3e^{-j(\pi/3)}e^{j(\pi n/3 + \pi/4)}$$

$$y_2[n] = H(e^{-j\pi/3})e^{-j(\pi n/3 + \pi/4)} = 3e^{j(\pi/3)}e^{-j(\pi n/3 + \pi/4)}$$

$$y[n] = 3e^{j(\pi n/3 - \pi/12)} + 3e^{-j(\pi n/3 - \pi/12)}$$

$$\Rightarrow y[n] = 6 \cos(\frac{\pi}{3}n - \frac{\pi}{12})$$

19

SINUSOID thru FIR

- IF $H^*(e^{j\hat{\omega}}) = H(e^{-j\hat{\omega}})$
- Multiply the Magnitudes
- Add the Phases

$$x[n] = A \cos(\hat{\omega}_1 n + \phi)$$


$$\Rightarrow y[n] = A |H(e^{j\hat{\omega}_1})| \cos(\hat{\omega}_1 n + \phi + \angle H(e^{j\hat{\omega}_1}))$$

2/25/2005


ECE-2025 Spring-05 jMc

20

LTI Demo with Sinusoids

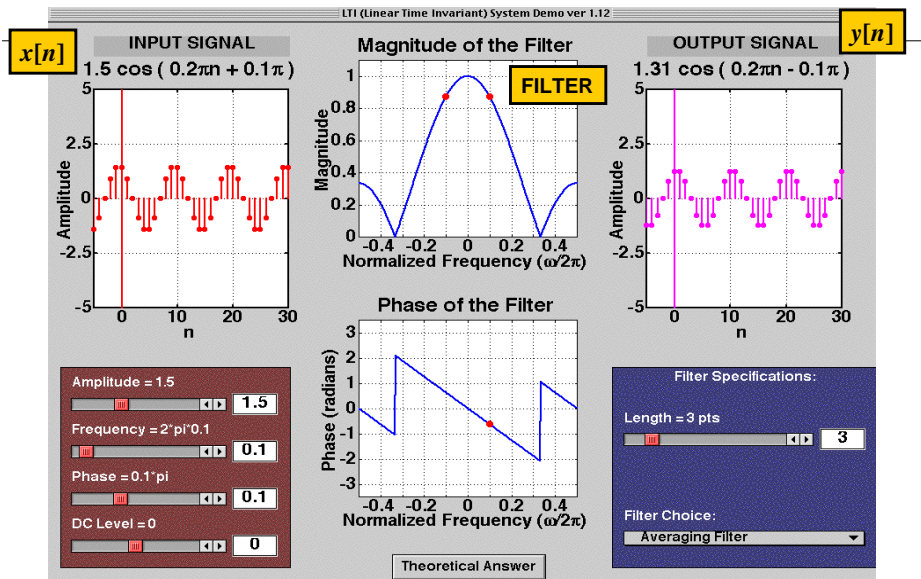


DIGITAL "FILTERING"

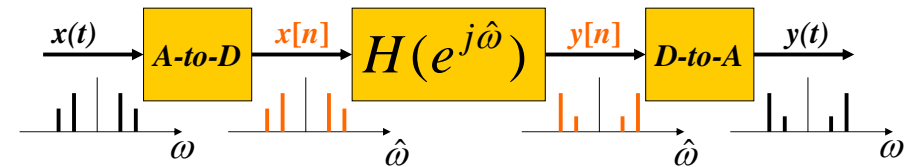

- ω ■ SPECTRUM of $x(t)$ (SUM of SINUSOIDS)
- $\hat{\omega}$ ■ SPECTRUM of $x[n]$
 - Is ALIASING a PROBLEM ?
- $\hat{\omega}$ ■ SPECTRUM $y[n]$ (FIR Gain or Nulls)
- ω ■ Then, OUTPUT $y(t)$ = SUM of SINUSOIDS

FREQUENCY SCALING

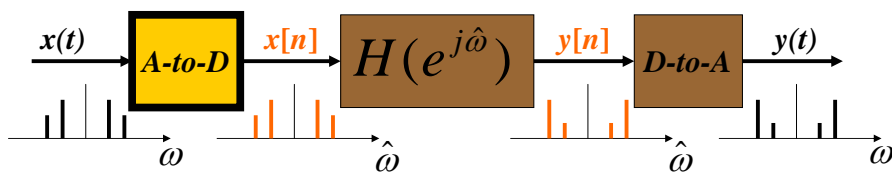


- TIME SAMPLING:
 - IF **NO** ALIASING:
 - FREQUENCY SCALING

$$t = nT_s$$

$$\hat{\omega} = \omega T_s = \frac{\omega}{f_s}$$

11-pt AVERAGER Example

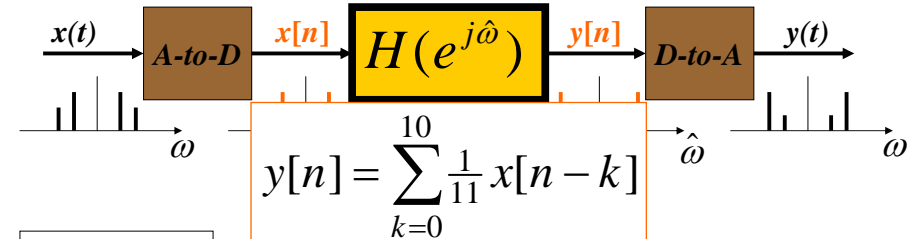


250 Hz

25 Hz

$$H(e^{j\hat{\omega}}) = \frac{\sin(\frac{11}{2} \hat{\omega})}{11 \sin(\frac{1}{2} \hat{\omega})} e^{-j5\hat{\omega}} \quad ?$$


$$x(t) = \cos(2\pi(25)t) + \cos(2\pi(250)t - \frac{1}{2}\pi)$$

D-A FREQUENCY SCALING

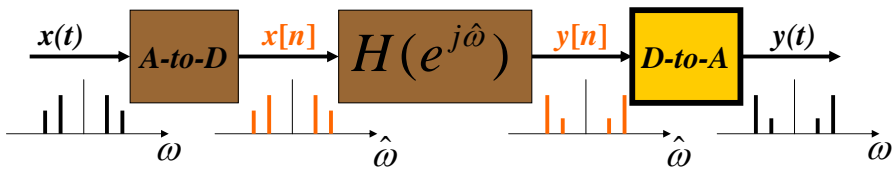


- TIME SAMPLING: $t = nT_s \Rightarrow n \leftarrow tf_s$
- RECONSTRUCT up to $0.5f_s$
 - FREQUENCY SCALING $\omega = \hat{\omega} f_s$

TRACK the FREQUENCIES

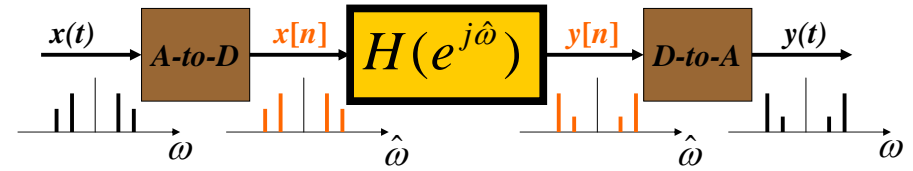

- | | | | | |
|--------|----------|-------------------|----------|--------|
| 250 Hz | 0.5π | $H(e^{j0.5\pi})$ | 0.5π | 250 Hz |
| 25 Hz | $.05\pi$ | $H(e^{j0.05\pi})$ | $.05\pi$ | 25 Hz |
- Fs = 1000 Hz** **NO new freqs**

11-pt AVERAGER

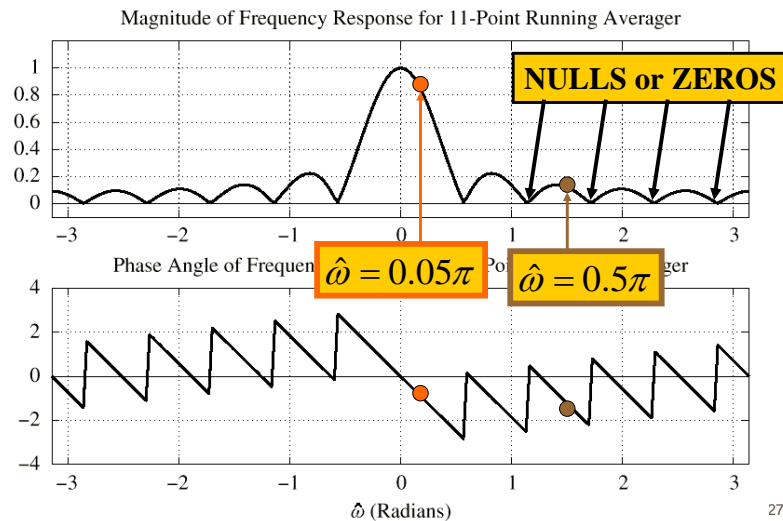

EVALUATE Freq. Response

$$H(e^{j\hat{\omega}}) = \frac{\sin(\frac{11}{2} \hat{\omega})}{11 \sin(\frac{1}{2} \hat{\omega})} e^{-j5\hat{\omega}}$$

At $\hat{\omega} = 0.5\pi$

$$H(e^{j\hat{\omega}}) = \frac{\sin(\frac{11}{2} (0.5\pi))}{11 \sin(\frac{1}{2} (0.5\pi))} e^{-j5(0.5\pi)}$$

$$= \frac{\sin(2.75\pi)}{11 \sin(0.25\pi)} e^{-j2.5\pi}$$

$$= 0.0909 e^{-j0.5\pi}$$


EVALUATE Freq. Response

$$x(t) = \cos(2\pi(25)t) + \sin(2\pi(250)t)$$

evaluating at 25 and 250 Hz.


$$\begin{aligned}
 H(e^{j2\pi(25)/1000}) &= \frac{\sin(\pi(25)(11)/1000)}{11 \sin(\pi(25)/1000)} e^{-j2\pi(25)(5)/1000} \\
 &= 0.8811 e^{-j\pi/4} \\
 H(e^{j2\pi(250)/1000}) &= \frac{\sin(\pi(250)(11)/1000)}{11 \sin(\pi(250)/1000)} e^{-j2\pi(250)(5)/1000} \\
 &= 0.0909 e^{-j\pi/2}
 \end{aligned}$$

$y(t) = 0.8811 \cos(2\pi(25)t - \pi/4) + 0.0909 \sin(2\pi(250)t - \pi/2)$

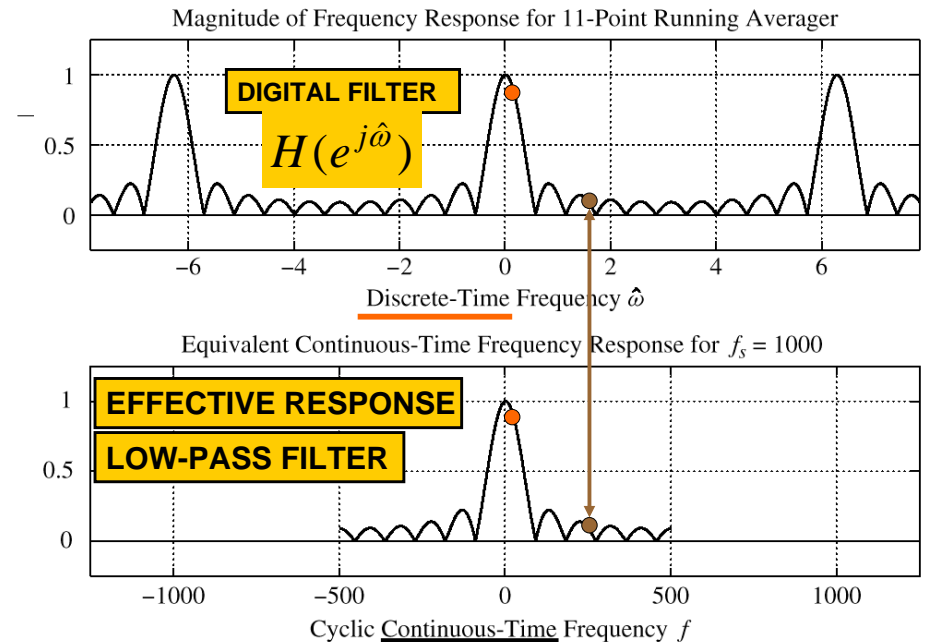


FILTER TYPES

- LOW-PASS FILTER (**LPF**)
 - BLURRING
 - ATTENUATES HIGH FREQUENCIES
- HIGH-PASS FILTER (**HPF**)
 - SHARPENING for IMAGES
 - BOOSTS THE HIGHS
 - REMOVES DC
- BAND-PASS FILTER (**BPF**)

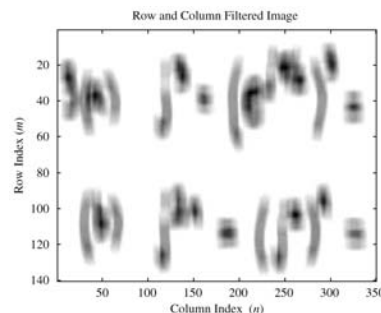


B & W IMAGE

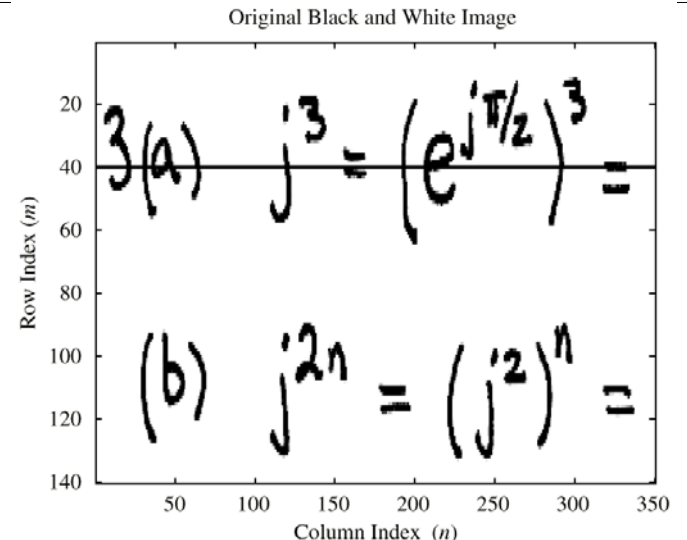


B&W IMAGE with COSINE


FILTERED: 11-pt AVG

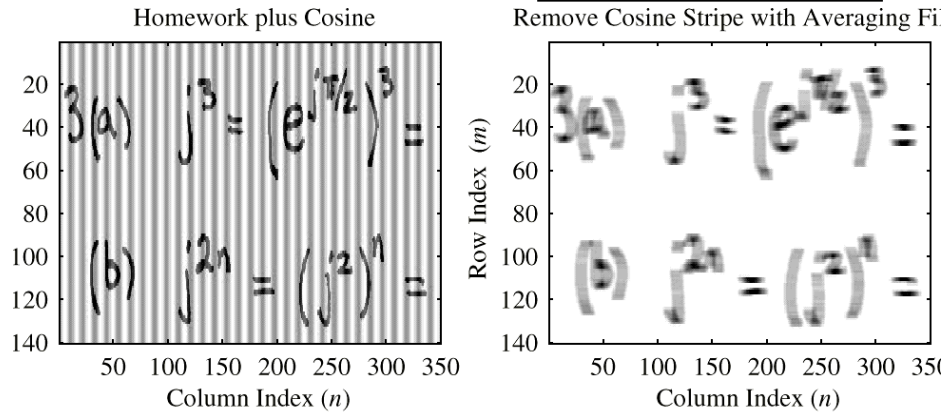

FILTERED B&W IMAGE

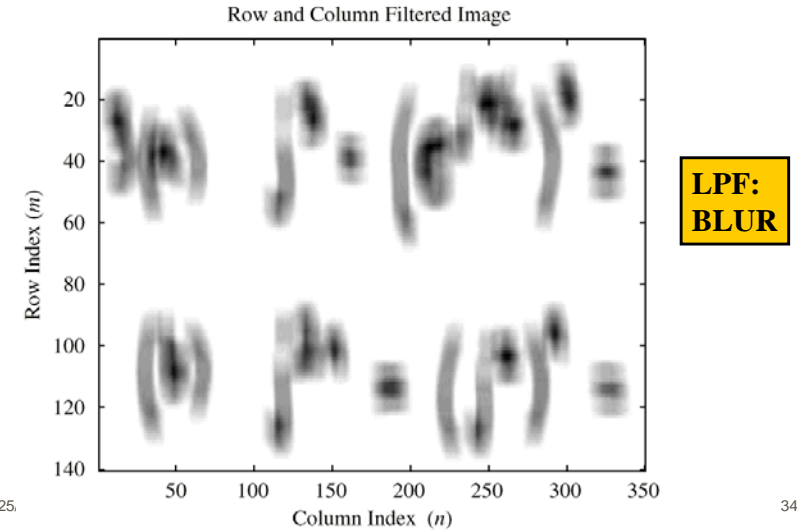

ROW of B&W IMAGE

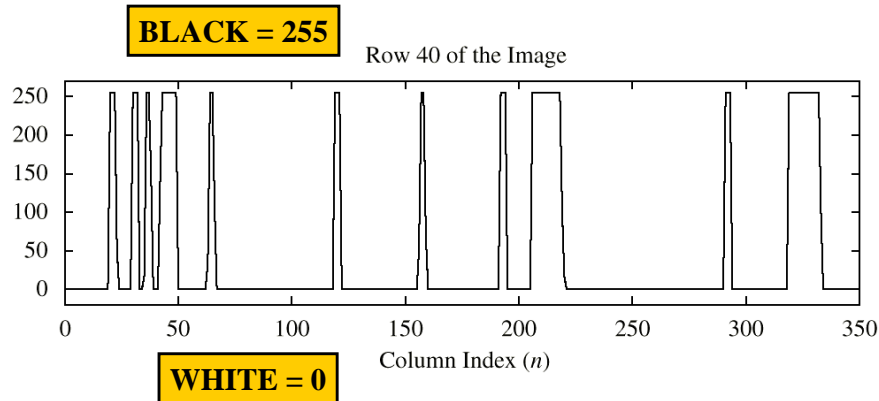

FILTERED ROW of IMAGE

