

Lecture 18
 Continuous-Time Signals
 and Systems
 27-Mar-06

Info: Web-CT, Lab, HW


- Labs and Homework:
 - Lab #8 turn in starting on Wed.
 - Lab #9 being done in two parts
 - First part will be entirely “in-Lab” (i.e., no report)
 - Second part requires a report on IIR BPF design
 - HW #9 (on IIR) due next week
- Quiz #3 will be 21-April (Friday)

Quiz #2 Results


Statistics: Quiz #2
 Graded out of: 100 Highest grade: 100 Mean grade: 81 Standard deviation: 15
 Number of records: 157 Lowest grade: 18 Median grade: 85

Score Range	Frequency
[40, 45)	1
[45, 50)	
[50, 55)	5
[55, 60)	6
[60, 65)	4
[65, 70)	10
[70, 75)	13
[75, 80)	13
[80, 85)	21
[85, 90)	26
[90, 95)	35
[95, 100)	7
[100]	13


3 DOMAINS MOVIE: FIR

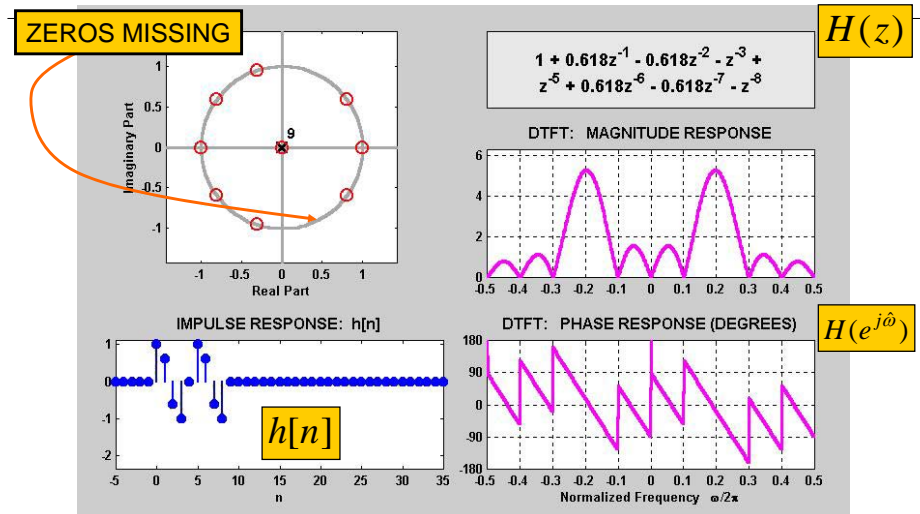

Complex POLE-ZERO PLOT

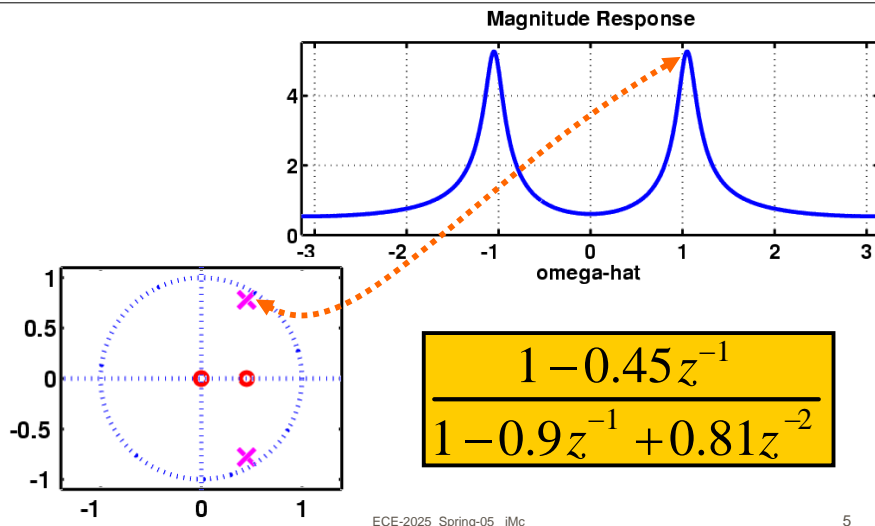

PeZ Demo: Zero Placing

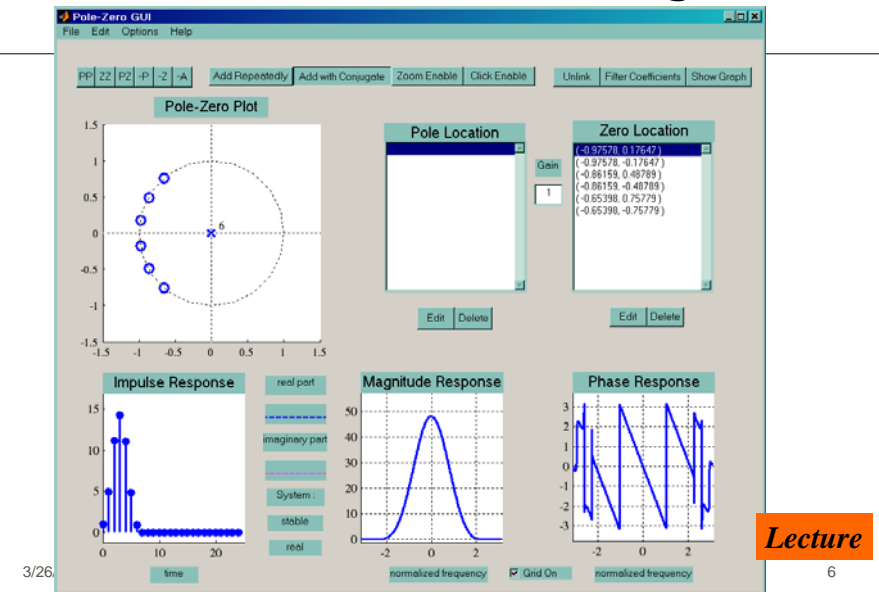


READING ASSIGNMENTS

- This Lecture:
 - Chapter 9, Sects 9-1 to 9-5
- Other Reading:
 - Recitation: Ch. 9, all
 - Next Lecture: Chapter 9, Sects 9-6 to 9-8

LECTURE OBJECTIVES

- Bye bye to D-T Systems for a while
- The UNIT IMPULSE signal
 - Definition
 - Properties
- Continuous-time signals and systems
 - Example systems
 - Review: **L**inearity and **T**ime-**I**nvariance
 - Convolution integral: **impulse** response

D-T Filtering of C-T Signals

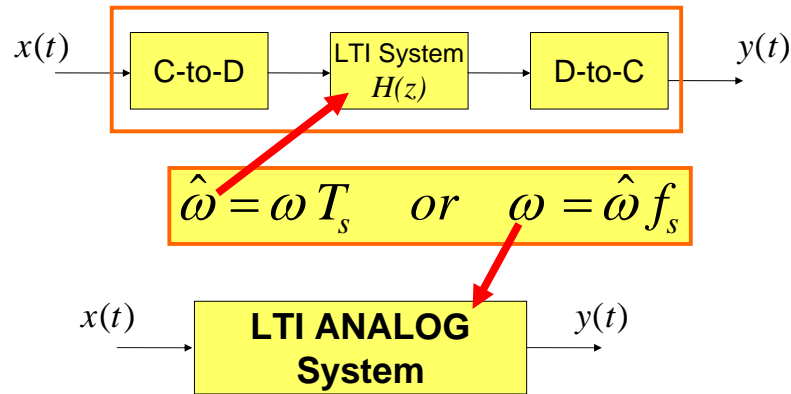


ANALOG SIGNALS $x(t)$


- INFINITE LENGTH
 - SINUSOIDS: $(t = \text{time in secs})$
 - PERIODIC SIGNALS
 - ONE-SIDED, e.g., for $t > 0$
 - UNIT STEP: $u(t)$
- FINITE LENGTH
 - SQUARE PULSE
- IMPULSE SIGNAL: $\delta(t)$

- DISCRETE-TIME: $x[n]$ is list of numbers

CT Signals: PERIODIC

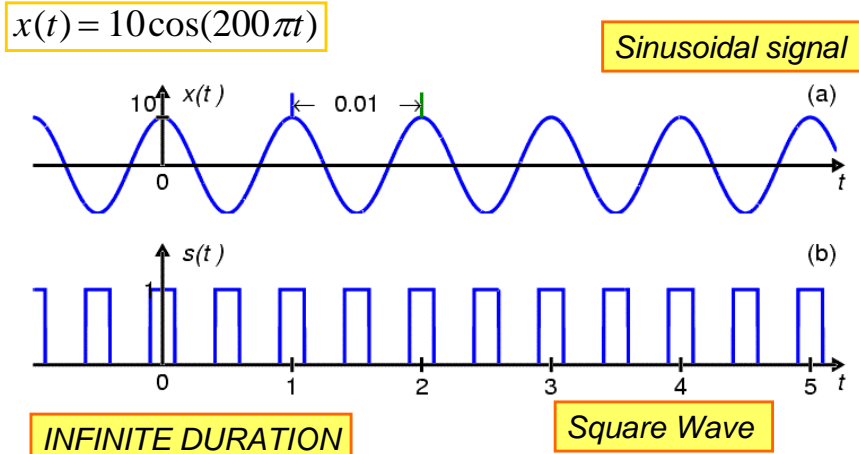


CT Signals: ONE-SIDED

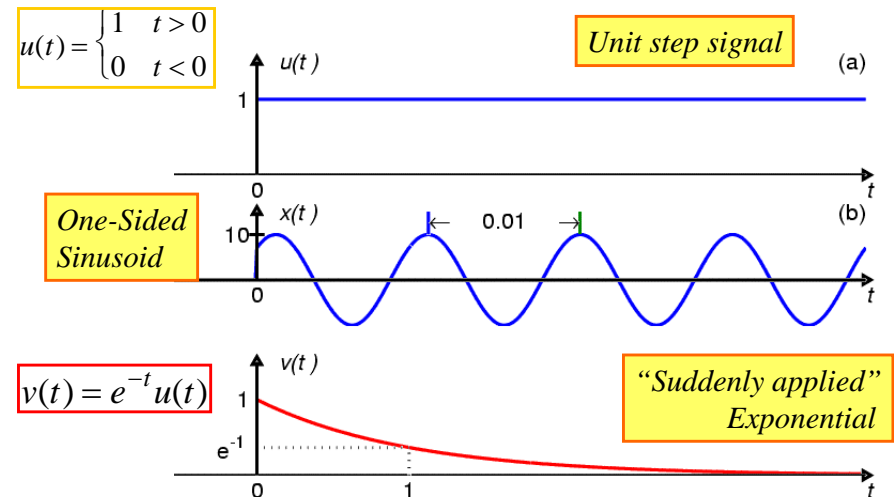


CT Signals: FINITE LENGTH

$$p(t) = u(t - 2) - u(t - 4)$$

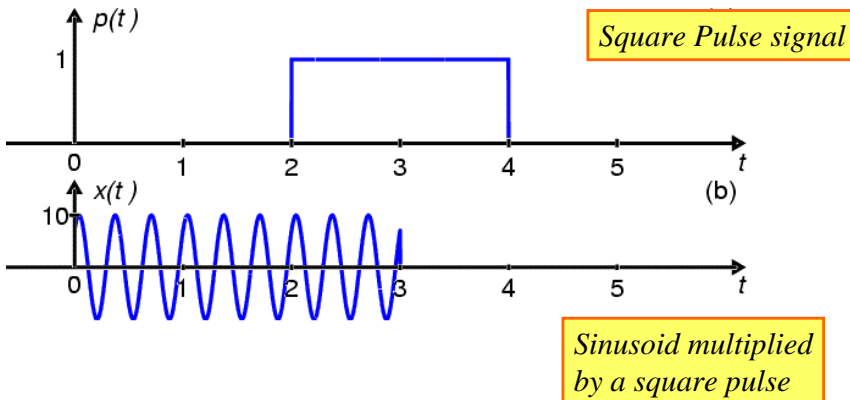

What is an Impulse?

- A signal that is concentrated at one point.

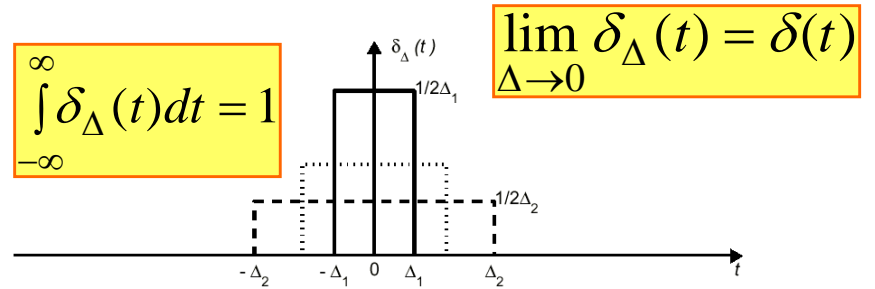

Defining the Impulse

- Assume the properties apply to the limit:


$$\lim_{\Delta \rightarrow 0} \delta_{\Delta}(t) = \delta(t)$$

- One “**INTUITIVE**” definition is:

$$\delta(t) = 0, \quad t \neq 0 \quad \text{Concentrated at } t=0$$


$$\int_{-\infty}^{\infty} \delta(\tau) d\tau = 1 \quad \text{Unit area}$$

Sampling Property

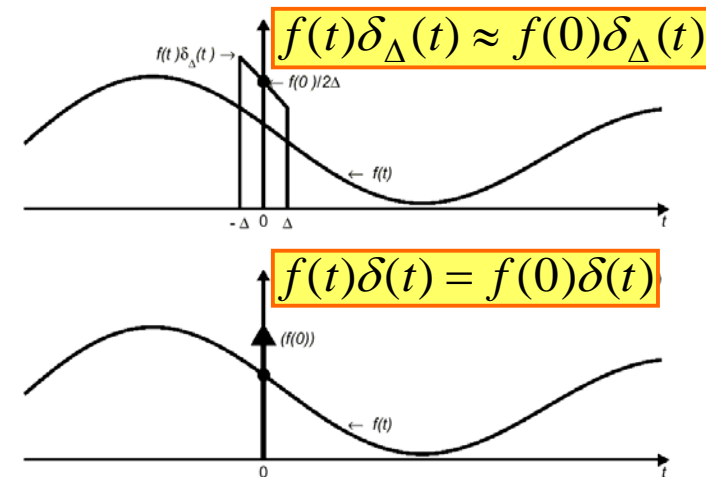

General Sampling Property

$$f(t)\delta(t - t_0) = f(t_0)\delta(t - t_0)$$

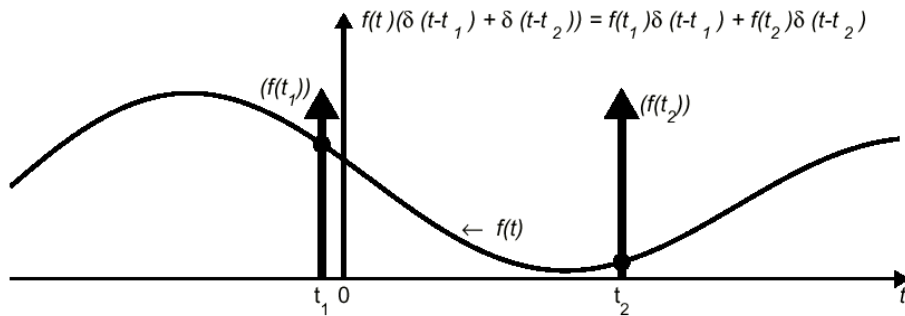

3/26/2006

ECE-2025 Spring-05 jMc

17

Properties of the Impulse

$$\delta(t - t_0) = 0, \quad t \neq t_0$$

Concentrated at one time

$$\int_{-\infty}^{\infty} \delta(t - t_0) dt = 1$$

Unit area

$$f(t)\delta(t - t_0) = f(t_0)\delta(t - t_0)$$

Sampling Property

$$\int_{-\infty}^{\infty} f(t)\delta(t - t_0) dt = f(t_0)$$

Extract one value of f(t)

$$\frac{du(t)}{dt} = \delta(t)$$


Derivative of unit step

3/26/2006

ECE-2025 Spring-05 jMc

18

Continuous-Time Systems

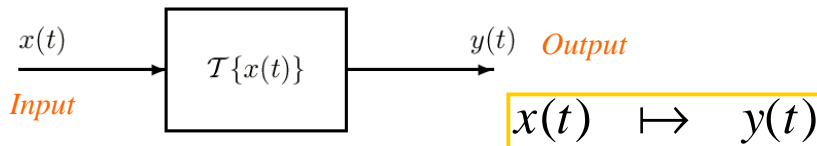

Examples:

- Delay $y(t) = x(t - t_d)$

- Modulator $y(t) = [A + x(t)]\cos \omega_c t$

- Integrator $y(t) = \int_{-\infty}^t x(\tau) d\tau$

3/26/2006

ECE-2025 Spring-05 jMc

19

CT BUILDING BLOCKS

- INTEGRATOR (CIRCUITS)
- DIFFERENTIATOR
- DELAY by t_0
- MODULATOR (e.g., AM Radio)
- MULTIPLIER & ADDER

3/26/2006

ECE-2025 Spring-05 jMc

20

Ideal Delay:


- Mathematical Definition:

$$y(t) = x(t - t_d)$$


- To find the IMPULSE RESPONSE, $h(t)$, let $x(t)$ be an impulse, so

$$h(t) = \delta(t - t_d)$$

Output of Ideal Delay of 1 sec

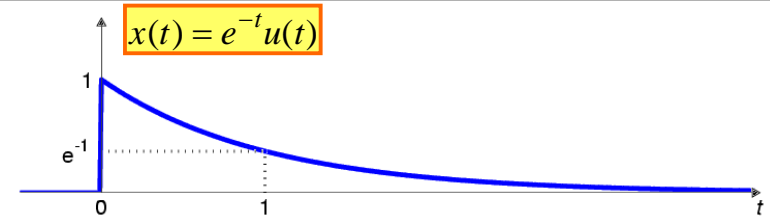

$$y(t) = x(t - 1) = e^{-(t-1)}u(t - 1)$$

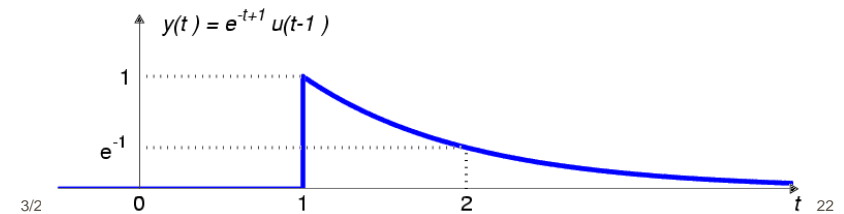

Integrator:

- Mathematical Definition:

$$y(t) = \int_{-\infty}^t x(\tau) d\tau$$

Running Integral

- To find the IMPULSE RESPONSE, $h(t)$, let $x(t)$ be an impulse, so

$$h(t) = \int_{-\infty}^t \delta(\tau) d\tau = u(t)$$

Integrator:


$$y(t) = \int_{-\infty}^t x(\tau) d\tau$$

- Integrate the impulse

$$\int_{-\infty}^t \delta(\tau) d\tau = u(t)$$

- IF $t < 0$, we get zero
- IF $t > 0$, we get one
 - Thus we have $h(t) = u(t)$ for the integrator

Graphical Representation

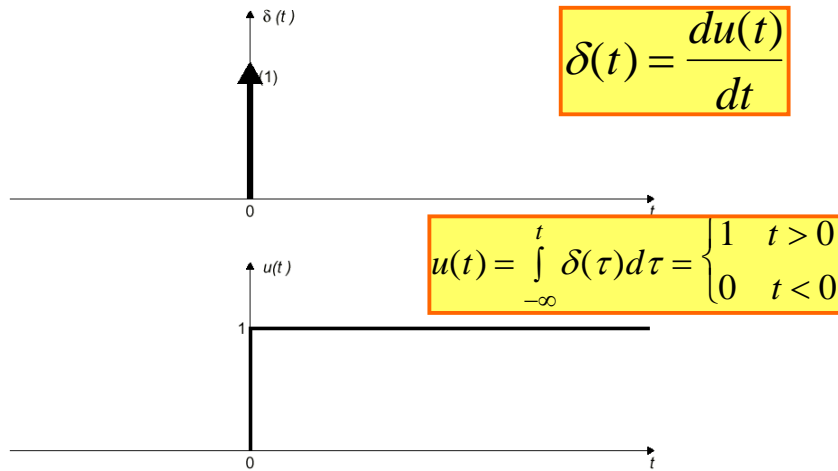


3/26/2006

ECE-2025 Spring-05 jMc

25

Output of Integrator

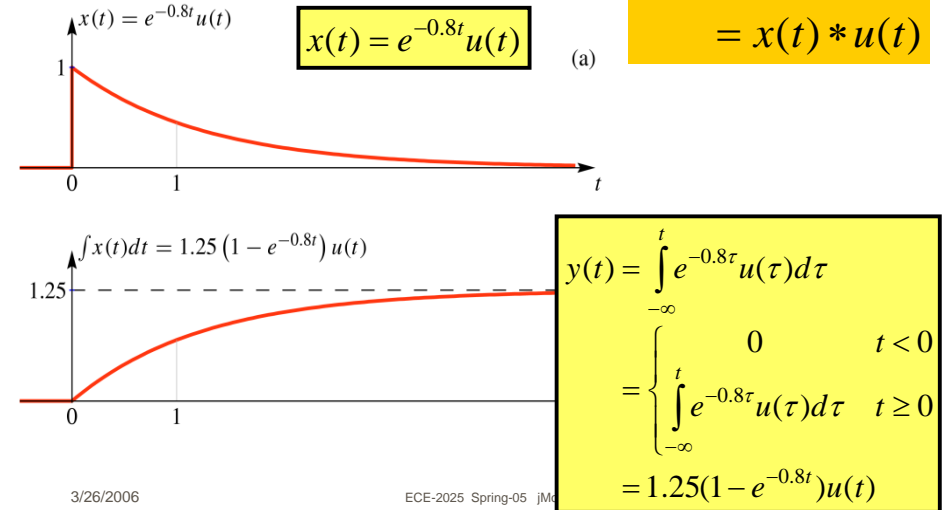

3/26/2006

ECE-2025 Spring-05 jMc

Differentiator:

- Mathematical Definition:

$$y(t) = \frac{dx(t)}{dt}$$

- To find $h(t)$, let $x(t)$ be an impulse, so


$$h(t) = \frac{d\delta(t)}{dt} = \delta^{(1)}(t) \quad \text{Doublet}$$

3/26/2006

ECE-2025 Spring-05 jMc

27

Differentiator Output: $y(t) = \frac{dx(t)}{dt}$

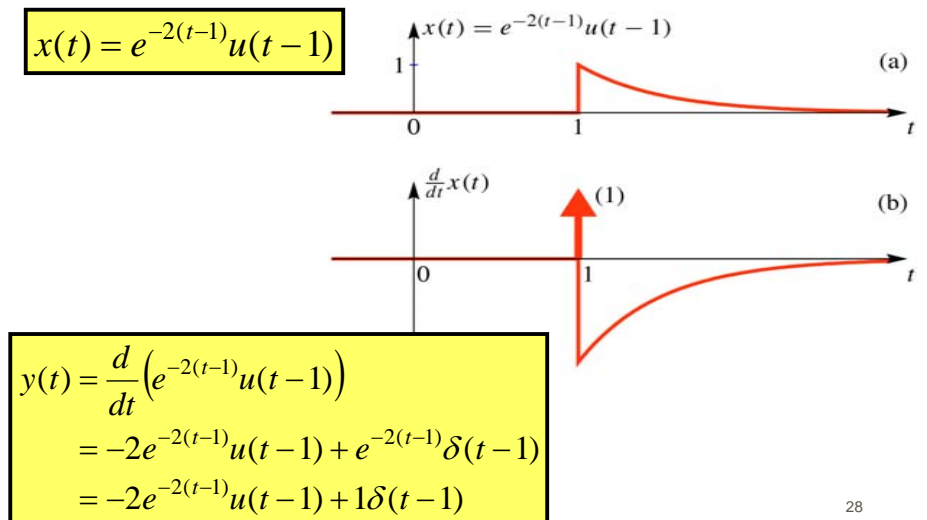

28


Linear and Time-Invariant (LTI) Systems

- If a continuous-time system is both linear and time-invariant, then the output $y(t)$ is related to the input $x(t)$ by a **convolution integral**

$$y(t) = \int_{-\infty}^{\infty} x(\tau)h(t - \tau)d\tau = x(t) * h(t)$$

where $h(t)$ is the **impulse response** of the system.

Testing for Linearity

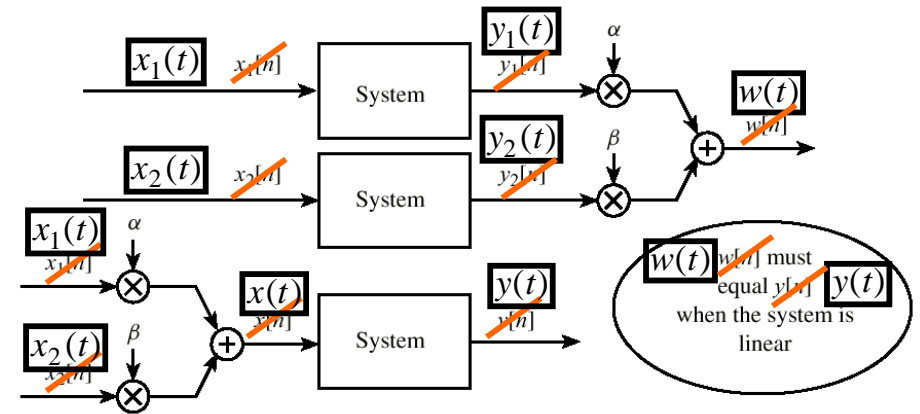

Testing Time-Invariance

