


Lecture 22
Fourier Transform Properties
10-April-06


Info: Web-CT, Lab, HW

- **CHECK YOUR GRADES !!!**
 - Web-CT is the OFFICIAL gradebook
 - **Quiz #2 grading issues: Today is the last day**
- **Quiz #3 will be 21-April (Friday)**
 - Coverage: HW #9, 10 and 11
 - Chapters 8, 9, 10, and 11
 - Review Session, 20-April, Thurs @ 6:00 pm
- HW #10 due this week
- Lab #10 (Formal) will be due starting 12-April
 - Lab #10 requires a test/demo
- TouchTone Decoder

DTMF Filtering with 8 BPFs

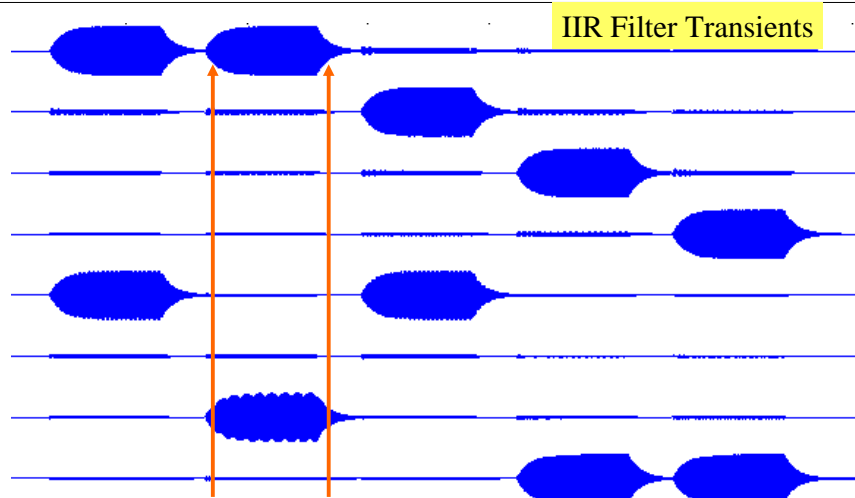

Average Energy with 8 BPFs

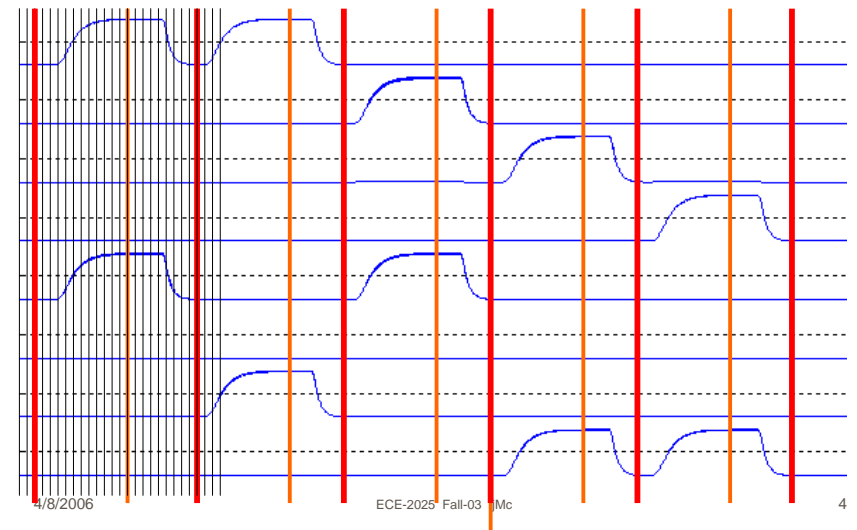

Strategy for using the FT

- Develop a set of **known** Fourier transform pairs.
- Develop a set of “theorems” or **properties** of the Fourier transform.
- Develop skill in formulating the problem in **either** the time-domain or the frequency-domain, *whichever leads to the simplest solution.*

Lecture

READING ASSIGNMENTS

- This Lecture:
 - Chapter 11, Sects. 11-5 to 11-9
 - **Tables in Section 11-9**
- Other Reading:
 - Recitation: Chapter 11, Sects. 11-1 to 11-9
 - Next Lectures: Chapter 12 (Applications)

LECTURE OBJECTIVES

- The Fourier transform

$$X(j\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt$$

- More examples of Fourier transform pairs
- Basic properties of Fourier transforms
 - **Convolution** property
 - **Multiplication** property

Fourier Transform

$$x(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega)e^{j\omega t} d\omega$$

Fourier Synthesis
(Inverse Transform)

$$X(j\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt$$

Fourier Analysis
(Forward Transform)

Time - domain \Leftrightarrow Frequency - domain

$$x(t) \Leftrightarrow X(j\omega)$$

WHY use the Fourier transform?



- Manipulate the **“Frequency Spectrum”**
- Analog Communication Systems
 - AM: Amplitude Modulation; FM
 - What are the **“Building Blocks”**?
 - Abstract Layer**, not implementation
- Ideal Filters: mostly BPFs
- Frequency Shifters
 - aka Modulators, Mixers or Multipliers: $x(t)p(t)$

4/8/2006

ECE-2025 Fall-03 jMc

9



$$x(t) = \begin{cases} 1 & |t| < T/2 \\ 0 & |t| > T/2 \end{cases} \Leftrightarrow X(j\omega) = \frac{\sin(\omega T / 2)}{(\omega / 2)}$$

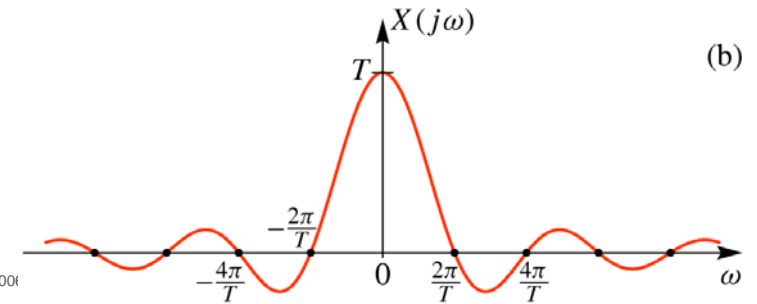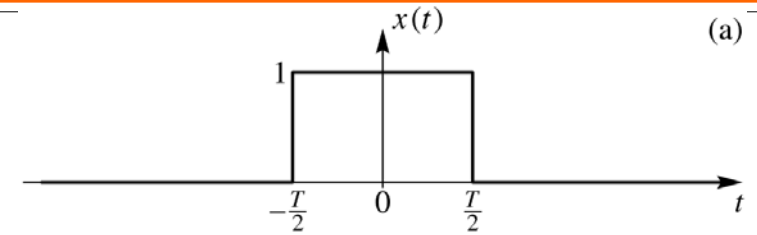

4/8/2006

11

$$x(t) = \frac{\sin(\omega_0 t)}{(\pi t)} \Leftrightarrow X(j\omega) = \begin{cases} 1 & |\omega| < \omega_0 \\ 0 & |\omega| > \omega_0 \end{cases}$$

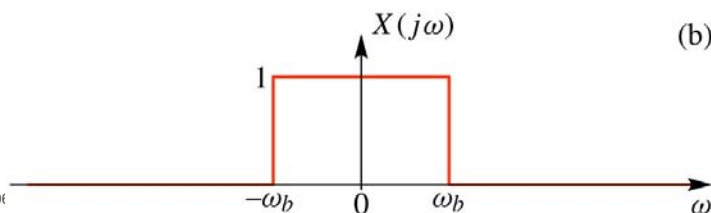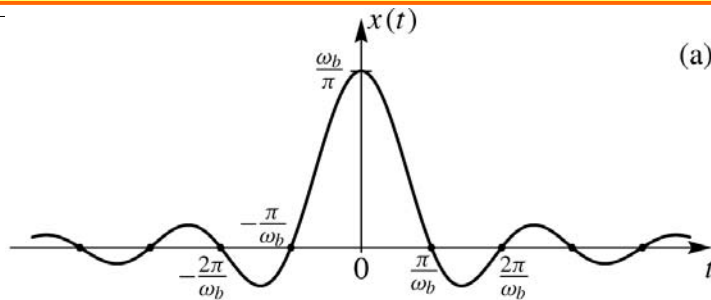

4/8/2006

12

Table of Fourier Transforms

$$x(t) = e^{-at} u(t) \Leftrightarrow X(j\omega) = \frac{1}{a + j\omega}$$

$$x(t) = \begin{cases} 1 & |t| < T/2 \\ 0 & |t| > T/2 \end{cases} \Leftrightarrow X(j\omega) = \frac{\sin(\omega T / 2)}{(\omega / 2)}$$

$$x(t) = \frac{\sin(\omega_0 t)}{(\pi t)} \Leftrightarrow X(j\omega) = \begin{cases} 1 & |\omega| < \omega_0 \\ 0 & |\omega| > \omega_0 \end{cases}$$


$$x(t) = \delta(t - t_0) \Leftrightarrow X(j\omega) = e^{-j\omega t_0}$$

$$x(t) = e^{j\omega_0 t} \Leftrightarrow X(j\omega) = 2\pi\delta(\omega - \omega_0)$$

4/8/2006

14

$$x(t) = \cos(\omega_0 t) \Leftrightarrow X(j\omega) = \pi\delta(\omega - \omega_0) + \pi\delta(\omega + \omega_0)$$

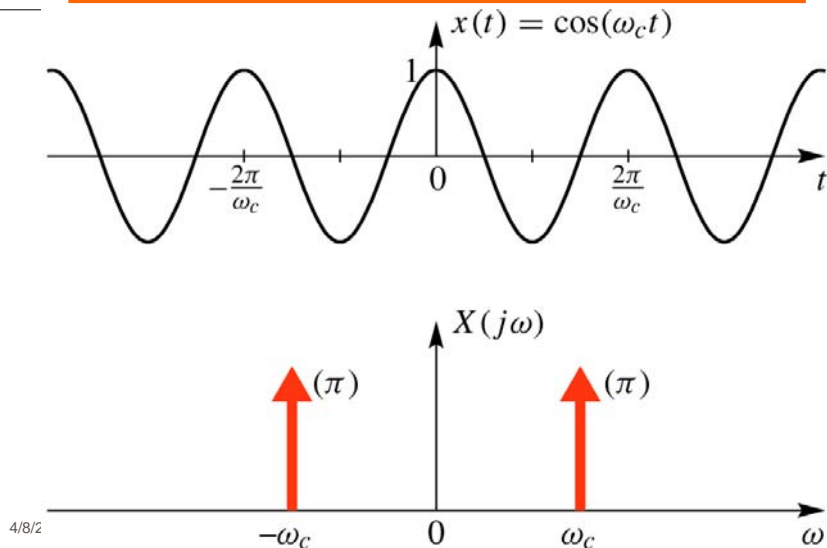

Fourier Transform of a General Periodic Signal

■ If $x(t)$ is periodic with period T_0 ,

$$x(t) = \sum_{k=-\infty}^{\infty} a_k e^{jk\omega_0 t} \quad a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-jk\omega_0 t} dt$$

Therefore, since $e^{jk\omega_0 t} \Leftrightarrow 2\pi\delta(\omega - k\omega_0)$


$$X(j\omega) = \sum_{k=-\infty}^{\infty} 2\pi a_k \delta(\omega - k\omega_0)$$

4/8/2006

ECE-2025 Fall-03 jMc

16

Square Wave Signal

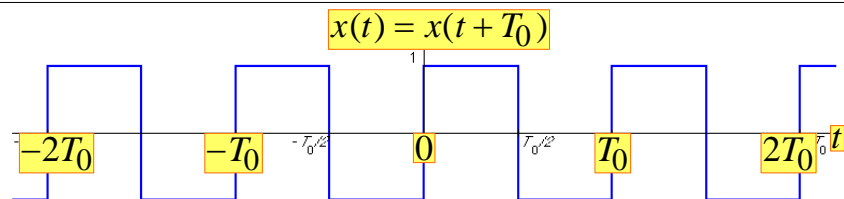

$$a_k = \frac{1}{T_0} \int_0^{T_0/2} (1) e^{-j\omega_0 k t} dt + \frac{1}{T_0} \int_{T_0/2}^{T_0} (-1) e^{-j\omega_0 k t} dt$$

$$a_k = \frac{e^{-j\omega_0 k T_0/2}}{-j\omega_0 k T_0} \Big|_0^{T_0/2} - \frac{e^{-j\omega_0 k T_0}}{-j\omega_0 k T_0} \Big|_{T_0/2}^{T_0} = \frac{1 - e^{-j\pi k}}{j\pi k}$$

4/8/2

17

Square Wave Fourier Transform

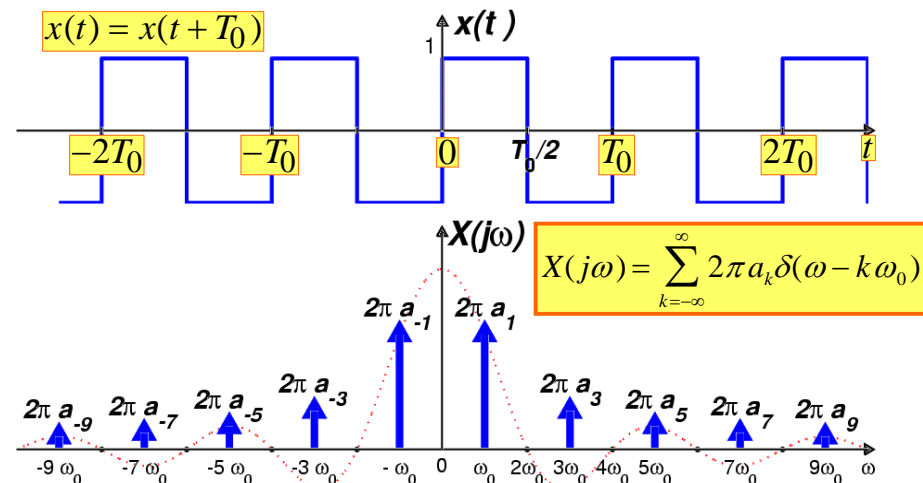


Table of Easy FT Properties

Linearity Property

$$ax_1(t) + bx_2(t) \Leftrightarrow aX_1(j\omega) + bX_2(j\omega)$$

Delay Property

$$x(t - t_d) \Leftrightarrow e^{-j\omega t_d} X(j\omega)$$

Frequency Shifting

$$x(t)e^{j\omega_0 t} \Leftrightarrow X(j(\omega - \omega_0))$$

Scaling

$$x(at) \Leftrightarrow \frac{1}{|a|} X(j\left(\frac{\omega}{a}\right))$$

4/8/2006

ECE-2025 Fall-03 jMc

19

Scaling Property

$$x(at) \Leftrightarrow \frac{1}{|a|} X(j\left(\frac{\omega}{a}\right))$$

$$\int_{-\infty}^{\infty} x(at)e^{-j\omega t} dt = \int_{-\infty}^{\infty} x(\lambda)e^{-j\omega(\lambda/a)} \frac{d\lambda}{|a|}$$

$$= \frac{1}{|a|} X(j\left(\frac{\omega}{a}\right))$$

$x(2t)$ shrinks; $\frac{1}{2} X(j\left(\frac{\omega}{2}\right))$ expands


4/8/2006

ECE-2025 Fall-03 jMc

20

Scaling Property

$$x(at) \Leftrightarrow \frac{1}{|a|} X(j\left(\frac{\omega}{a}\right))$$

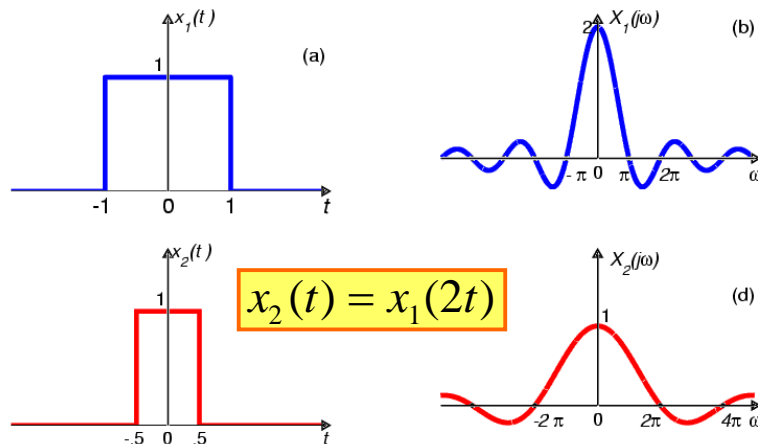

21

Uncertainty Principle

- Try to make $x(t)$ shorter
 - Then $X(j\omega)$ will get wider
 - Narrow pulses have wide bandwidth
- Try to make $X(j\omega)$ narrower
 - Then $x(t)$ will have longer duration
- **Cannot simultaneously reduce time duration and bandwidth**

4/8/2006

ECE-2025 Fall-03 jMc

22

Significant FT Properties

$$x(t) * h(t) \Leftrightarrow H(j\omega)X(j\omega)$$

$$x(t)p(t) \Leftrightarrow \frac{1}{2\pi} X(j\omega) * P(j\omega)$$

$$x(t)e^{j\omega_0 t} \Leftrightarrow X(j(\omega - \omega_0))$$


Differentiation Property

$$\frac{dx(t)}{dt} \Leftrightarrow (j\omega)X(j\omega)$$

4/8/2006

23

Convolution Property

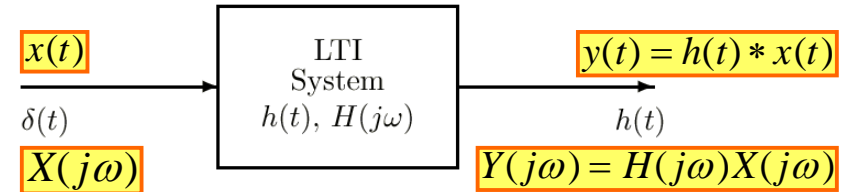

- Convolution in the time-domain

$$y(t) = h(t) * x(t) = \int_{-\infty}^{\infty} h(\tau)x(t - \tau)d\tau$$

corresponds to **MULTIPLICATION** in the frequency-domain

$$Y(j\omega) = H(j\omega)X(j\omega)$$

4/8/2006

ECE-2025 Fall-03 jMc


24

Convolution Example

- Bandlimited **Input** Signal
 - “sinc” function
- Ideal LPF (Lowpass Filter)
 - h(t)** is a “sinc”
- Output** is Bandlimited
 - Convolve “sincs”

Ideally Bandlimited Signal

$$x(t) = \frac{\sin(100\pi t)}{(\pi t)} \Leftrightarrow X(j\omega) = \begin{cases} 1 & |\omega| < 100\pi \\ 0 & |\omega| > 100\pi \end{cases}$$

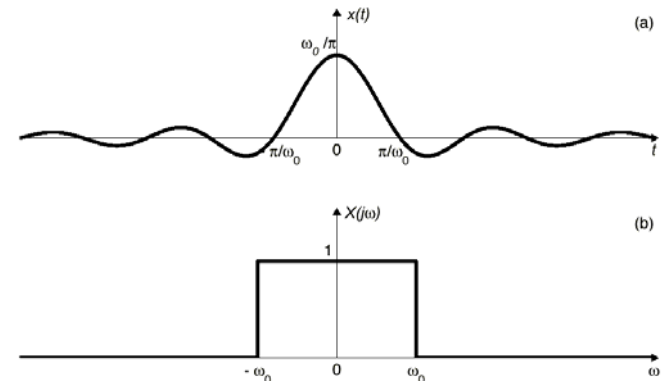

4/8/2006

ECE-2025 Fall-03 jMc

25


4/8/2006

26

Convolution Example

$$x(t) * h(t) \Leftrightarrow H(j\omega)X(j\omega)$$

$$\frac{\sin(100\pi t)}{\pi t} * \frac{\sin(200\pi t)}{\pi t} = \frac{\sin(100\pi t)}{\pi t}$$

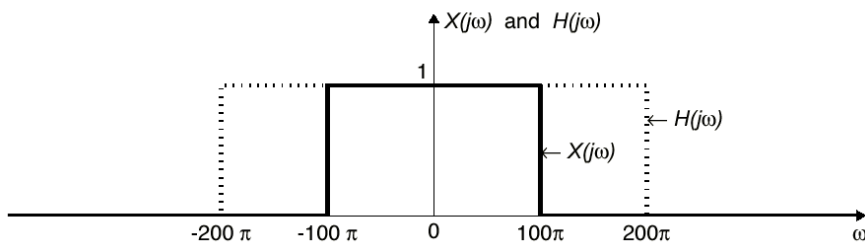

Cosine Input to LTI System

$$Y(j\omega) = H(j\omega)X(j\omega)$$

$$= H(j\omega)[\pi\delta(\omega - \omega_0) + \pi\delta(\omega + \omega_0)]$$

$$= H(j\omega_0)\pi\delta(\omega - \omega_0) + H(-j\omega_0)\pi\delta(\omega + \omega_0)$$


$$\begin{aligned} y(t) &= H(j\omega_0)\frac{1}{2}e^{j\omega_0 t} + H(-j\omega_0)\frac{1}{2}e^{-j\omega_0 t} \\ &= H(j\omega_0)\frac{1}{2}e^{j\omega_0 t} + H^*(j\omega_0)\frac{1}{2}e^{-j\omega_0 t} \\ &= |H(j\omega_0)|\cos(\omega_0 t + \angle H(j\omega_0)) \end{aligned}$$

4/8/2006

ECE-2025 Fall-03 jMc

28

Ideal Lowpass Filter

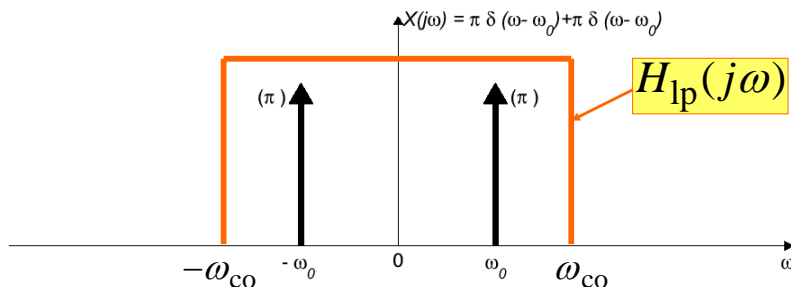

$$y(t) = x(t) \quad \text{if } \omega_0 < \omega_{c0}$$


$$y(t) = 0 \quad \text{if } \omega_0 > \omega_{c0}$$

4/8/2006


ECE-2025 Fall-03 jMc

29

Ideal Lowpass Filter

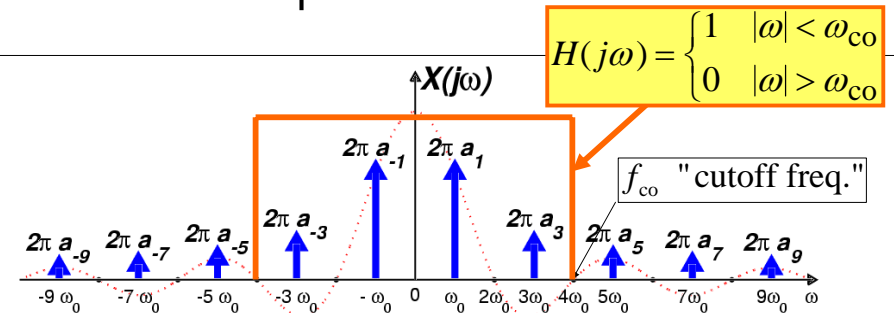


$$y(t) = \frac{4}{\pi} \sin(50\pi t) + \frac{4}{3\pi} \sin(150\pi t)$$

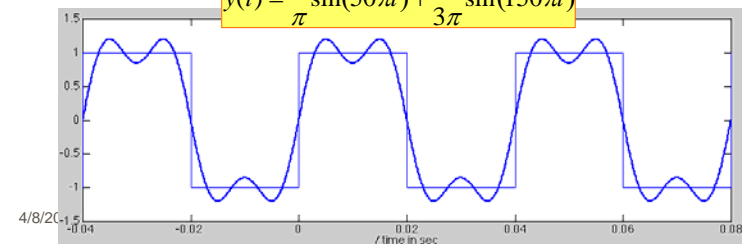

4/8/2006

30

Signal Multiplier (Modulator)

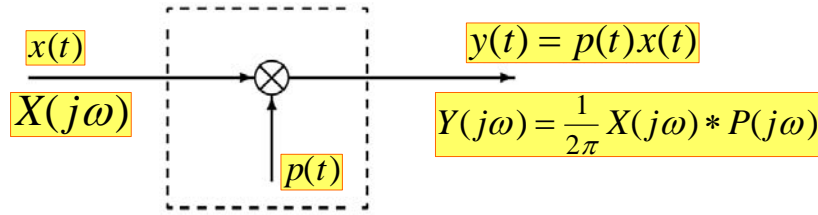

- Multiplication in the time-domain corresponds to convolution in the frequency-domain.

$$Y(j\omega) = \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\theta)P(j(\omega - \theta))d\theta$$

4/8/2006

31


Frequency Shifting Property

$$x(t)e^{j\omega_0 t} \Leftrightarrow X(j(\omega - \omega_0))$$

$$\int_{-\infty}^{\infty} e^{j\omega_0 t} x(t) e^{-j\omega t} dt = \int_{-\infty}^{\infty} x(t) e^{-j(\omega - \omega_0)t} dt = X(j(\omega - \omega_0))$$

$$y(t) = \frac{\sin 7t}{\pi t} e^{j\omega_0 t} \Leftrightarrow Y(j\omega) = \begin{cases} 1 & \omega_0 - 7 < \omega < \omega_0 + 7 \\ 0 & \text{elsewhere} \end{cases}$$

$$y(t) = x(t) \cos(\omega_0 t) \Leftrightarrow Y(j\omega) = \frac{1}{2} X(j(\omega - \omega_0)) + \frac{1}{2} X(j(\omega + \omega_0))$$

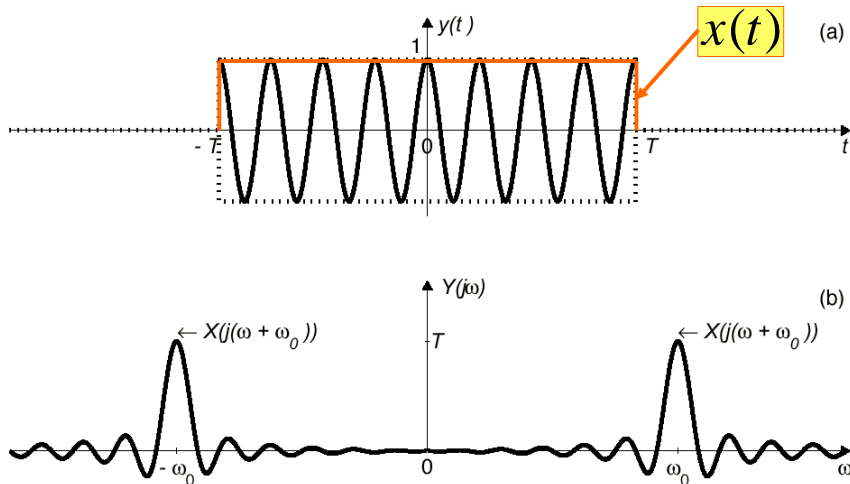

4/8/2006

ECE-2025 Fall-03 jMc

33

Differentiation Property

$$\frac{dx(t)}{dt} = \frac{d}{dt} \left(\frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega) e^{j\omega t} d\omega \right) = \frac{1}{2\pi} \int_{-\infty}^{\infty} (j\omega) X(j\omega) e^{j\omega t} d\omega$$

Multiply by $j\omega$

$$\frac{d}{dt} (e^{-at} u(t)) = -ae^{-at} u(t) + e^{-at} \delta(t) = \delta(t) - ae^{-at} u(t)$$

$$\Leftrightarrow \frac{j\omega}{a + j\omega}$$

4/8/2006

ECE-2025 Fall-03 jMc

34