

PROBLEM s-04-Q.2.1:

A periodic signal $x(t)$ is represented as a Fourier series of the form

$$x(t) = \sum_{k=-\infty}^{\infty} (j^k + 5\delta[k]) e^{j0.5\pi kt}$$

- (a) Determine the fundamental period of the signal $x(t)$, i.e., the minimum period.

$T_0 =$ sec. (Give a numerical answer.)

- (b) Determine the DC value of $x(t)$. Give your answer as a number.

$DC =$

- (c) Define a new signal by adding a sinusoid to $x(t)$

$$y(t) = 2 \cos(1.5\pi t - \pi) + x(t)$$

The new signal, $y(t)$ can be expressed in the following Fourier Series with new coefficients $\{b_k\}$:

$$y(t) = \sum_{k=-\infty}^{\infty} b_k e^{j0.5\pi kt}$$

Fill in the following table, giving *numerical values* for each $\{b_k\}$ in polar form:.

Hint: Find a simple relationship between $\{b_k\}$ and $\{a_k\}$.


b_k	Mag	Phase
b_{-3}		
b_{-2}		
b_{-1}		
b_0		
b_1		
b_2		
b_3		

PROBLEM s-04-Q.2.2:

For each short question, pick a correct frequency⁷ (from the list on the right only) and enter the number in the answer box⁸:

Question**Frequency**

- (a) If the C/D converter output is $x[n] = A \cos(0.4\pi n)$, and the sampling rate is 10000 samples/sec, then determine one possible value for the input frequency of $x(t)$:

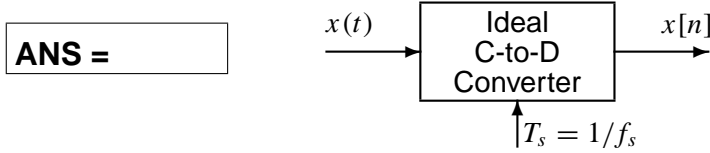

9000 Hz

4000 Hz

2000 Hz

1600 Hz

1200 Hz

1000 Hz

800 Hz

500 Hz

400 Hz

- (b) If the following MATLAB code is implemented, what is the frequency of the sound that will be produced at the output of the computer's D-to-A converter.

```
soundsc( cos(1.8*pi*(0:65536)), 10000 );
```

ANS =

- (c) Determine the Nyquist rate for sampling the signal $x(t)$ defined by: $x(t) = \Re\{e^{j1200\pi t} + e^{j1600\pi t}\}$.

ANS =

⁷Some questions might have more than one answer, but you only need to pick one correct answer.

⁸It is possible to use an answer more than once.

PROBLEM s-04-Q.2.3:

Pick the correct output signal (from the list on the right) and enter the number in the answer box:

System Description and Input Signal**Output Signal**

(a) $y[n] = (\delta[n - 1] - \delta[n - 2]) * (\delta[n] + \delta[n - 1])$

ANS =

1 $y[n] = \delta[n - 2] - \delta[n - 4]$

2 $y[n] = 3 \sin(2\pi n/3 - 5\pi/6)$ for all n

(b) $x[n] = 1 + \cos(2\pi n/3)$ for all n
and $h[n] = \delta[n] + \delta[n - 1] + \delta[n - 2]$

ANS =

3 $y[n] = \delta[n - 3] - \delta[n - 5]$

4 $y[n] = \delta[n - 3]$

(c) $x[n] = \delta[n - 2]$
and $y[n] = x[n - 1]$

ANS =

5 $y[n] = 0$ for all n

6 $y[n] = 3$ for all n

(d) $x[n] = \delta[n - 3]$
and $h[n] = \delta[n] - \delta[n - 2]$

ANS =


7 $y[n] = \delta[n - 1] - \delta[n - 3]$

8 None of the above

(e) `yy = conv([1,0,-1], cos(0.5*pi*nn))`

ANS =

(f) Plot the signal $s[n] = u[n + 6] + \delta[n - 1]$.

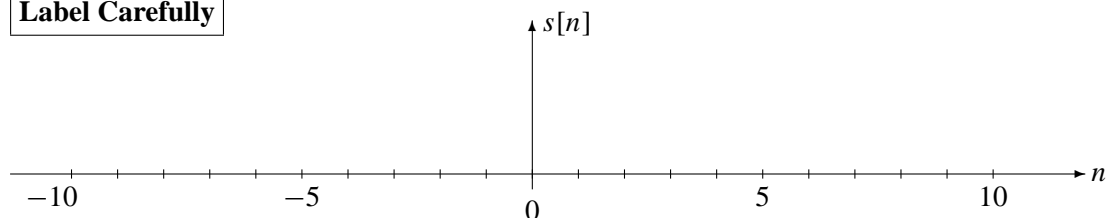Label Carefully 

PROBLEM s-04-Q.2.4:

Pick the correct frequency response (from the list on the right) and enter the number in the answer box:

Time-Domain Description

(a) $y[n] = x[n] + x[n - 1]$

ANS =

(b) $h[n] = \delta[n - 1] + \delta[n - 3]$

ANS =

(c) $y[n] = x[n - 1]$

ANS =

(d) $\{b_k\} = \{1, 0, -1\}$

ANS =

(e) $\{b_k\} = \{1, 1, 1, 1\}$

ANS =

(f) Select **all** systems (from the list on the right) that **null out** DC. Enter all numbers that apply.

ANS = **Frequency Response**

1 $H(e^{j\hat{\omega}}) = 2e^{-j2\hat{\omega}} \cos(\hat{\omega})$

2 $H(e^{j\hat{\omega}}) = e^{-j\hat{\omega}}(1 + 2 \cos(\hat{\omega}))$

3 $H(e^{j\hat{\omega}}) = 1 - e^{-j2\hat{\omega}}$

4 $H(e^{j\hat{\omega}}) = e^{-j\hat{\omega}}$

5 $H(e^{j\hat{\omega}}) = \frac{\sin(2\hat{\omega})}{\sin(\frac{1}{2}\hat{\omega})} e^{-j3\hat{\omega}/2}$

6 $H(e^{j\hat{\omega}}) = 2je^{-j2\hat{\omega}} \sin(\hat{\omega})$

7 $H(e^{j\hat{\omega}}) = \frac{\sin(\hat{\omega})}{\sin(\frac{1}{2}\hat{\omega})} e^{-j\hat{\omega}/2}$

8 None of the above