

# Signal Processing First

## Lecture 13 Digital Filtering of Analog Signals

10/6/2003

© 2003, JH McClellan & RW Schafer

1

# READING ASSIGNMENTS

- This Lecture:
  - Chapter 6, Sections 6-6, 6-7 & 6-8
- Other Reading:
  - Recitation: Chapter 6
    - FREQUENCY RESPONSE EXAMPLES
  - Next Lecture: Chapter 7


10/6/2003

© 2003, JH McClellan & RW Schafer

3

# LECTURE OBJECTIVES

- Two Domains: Time & Frequency
- Track the spectrum of  $x[n]$  thru an FIR Filter: **Sinusoid-IN gives Sinusoid-OUT**
- **UNIFICATION**: How does Frequency Response affect  $x(t)$  to produce  $y(t)$  ?

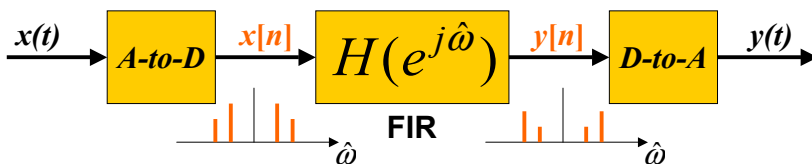

10/6/2003

© 2003, JH McClellan & RW Schafer

4

# TIME & FREQUENCY

$$y[n] = \sum_{k=0}^M b_k x[n-k] = \sum_{k=0}^M h[k] x[n-k]$$

**FIR DIFFERENCE EQUATION is the TIME-DOMAIN**

$$H(e^{j\hat{\omega}}) = \sum_{k=0}^M h[k] e^{-j\hat{\omega}k}$$

$$H(e^{j\hat{\omega}}) = h[0] + h[1]e^{-j\hat{\omega}} + h[2]e^{-j2\hat{\omega}} + h[3]e^{-j3\hat{\omega}} + \dots$$


10/6/2003

© 2003, JH McClellan & RW Schafer

5

## Ex: DELAY by 2 SYSTEM

Find  $h[n]$  and  $H(e^{j\hat{\omega}})$  for  $y[n] = x[n - 2]$

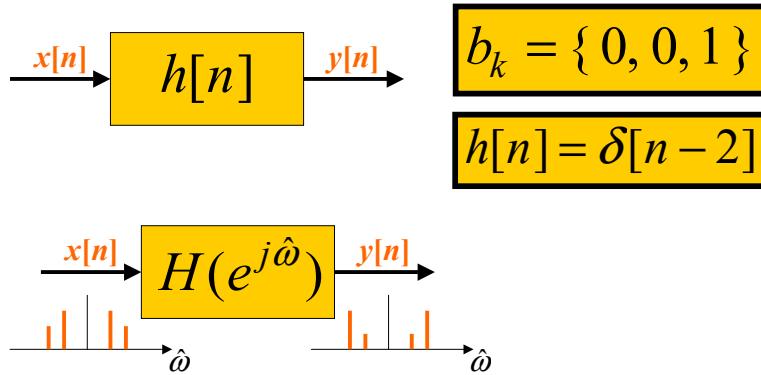


10/6/2003

© 2003, JH McClellan & RW Schaffer

6

## DELAY by 2 SYSTEM

Find  $h[n]$  and  $H(e^{j\hat{\omega}})$  for  $y[n] = x[n - 2]$

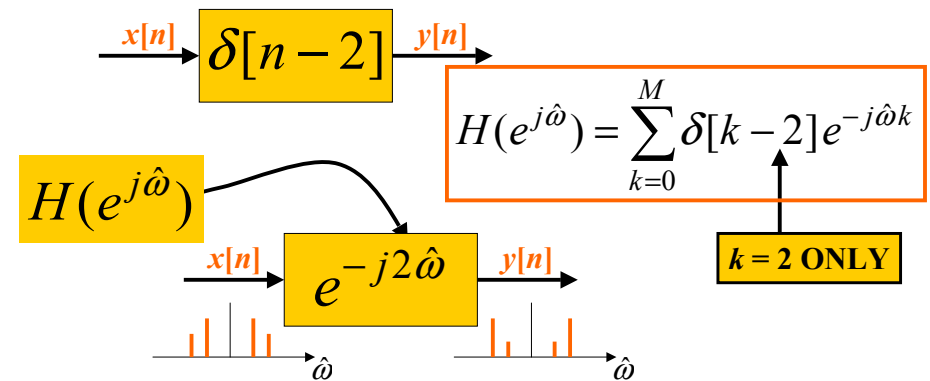

10/6/2003

© 2003, JH McClellan & RW Schaffer

7

## GENERAL DELAY PROPERTY

Find  $h[n]$  and  $H(e^{j\hat{\omega}})$  for  $y[n] = x[n - n_d]$

$$h[n] = \delta[n - n_d]$$

$$H(e^{j\hat{\omega}}) = \sum_{k=0}^M \delta[k - n_d] e^{-j\hat{\omega}k} = e^{-j\hat{\omega}n_d}$$

ONLY ONE  
non-ZERO TERM  
for  $k$  at  $k = n_d$


10/6/2003

© 2003, JH McClellan & RW Schaffer

8

## FREQ DOMAIN --> TIME ??

- START with  $H(e^{j\hat{\omega}})$  and find  $h[n]$  or  $b_k$

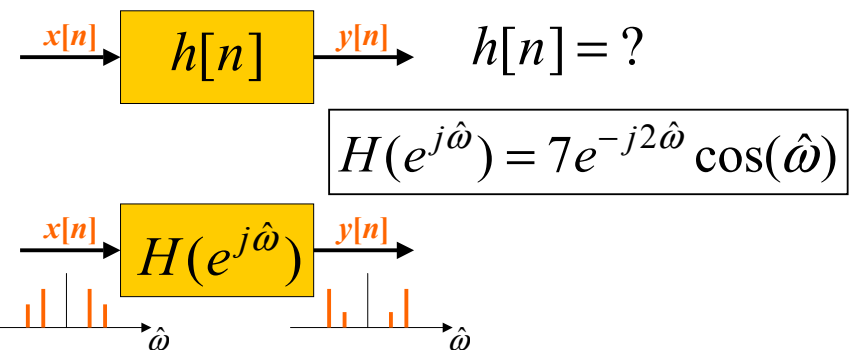

10/6/2003

© 2003, JH McClellan & RW Schaffer

9

# FREQ DOMAIN --> TIME

$$\begin{aligned}
 H(e^{j\hat{\omega}}) &= 7e^{-j2\hat{\omega}} \cos(\hat{\omega}) && \text{EULER's Formula} \\
 &= 7e^{-j2\hat{\omega}} (0.5e^{j\hat{\omega}} + 0.5e^{-j\hat{\omega}}) \\
 &= (3.5e^{-j\hat{\omega}} + 3.5e^{-j3\hat{\omega}}) \\
 \hline
 h[n] &= 3.5\delta[n-1] + 3.5\delta[n-3] \\
 b_k &= \{0, 3.5, 0, 3.5\}
 \end{aligned}$$

# PREVIOUS LECTURE REVIEW

- SINUSOIDAL INPUT SIGNAL
  - OUTPUT has SAME FREQUENCY
  - DIFFERENT Amplitude and Phase
- FREQUENCY RESPONSE of FIR
  - MAGNITUDE vs. Frequency
  - PHASE vs. Freq
  - PLOTTING


$$H(e^{j\hat{\omega}}) = \underbrace{|H(e^{j\hat{\omega}})|}_{\text{MAG}} e^{j\underbrace{\angle H(e^{j\hat{\omega}})}_{\text{PHASE}}}$$

# FREQ. RESPONSE PLOTS


- DENSE GRID (**ww**) from  $-\pi$  to  $+\pi$ 
  - **ww** =  $-\text{pi} : (\text{pi}/100) : \text{pi}$ ;
- **HH** = **freqz** (**bb**, 1, **ww**)
  - VECTOR **bb** contains Filter Coefficients
  - DSP-First: **HH** = **freeskz** (**bb**, 1, **ww**)

$$H(e^{j\hat{\omega}}) = \sum_{k=0}^M b_k e^{-j\hat{\omega}k}$$

Magnitude of Frequency Response of FIR Filter with Coefficients [1, 2, 1]

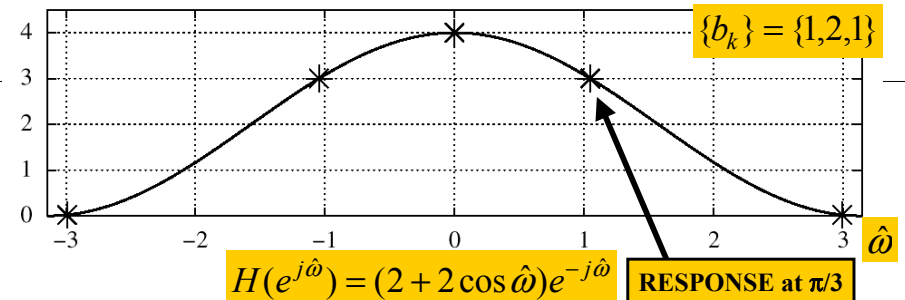


Phase Angle of Frequency Response of FIR Filter with Coefficients [1, 2, 1]

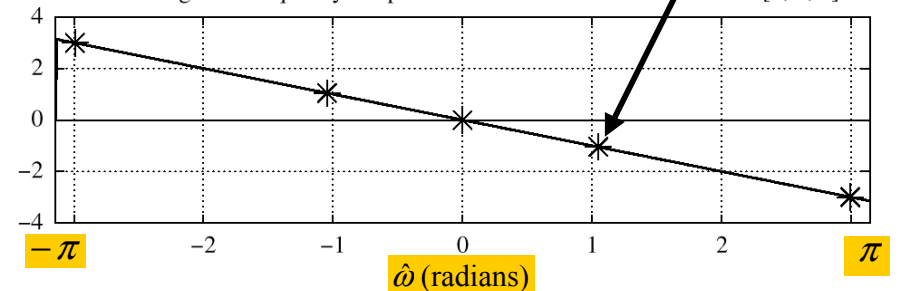

## EXAMPLE 6.2

Find  $y[n]$  when  $H(e^{j\hat{\omega}})$  is known  
and  $x[n] = 2e^{j\pi/4} e^{j(\pi/3)n}$

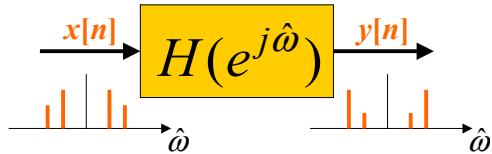

$$H(e^{j\hat{\omega}}) = (2 + 2 \cos \hat{\omega}) e^{-j\hat{\omega}}$$

10/6/2003

© 2003, JH McClellan & RW Schaefer

14

## EXAMPLE 6.2 (answer)

Find  $y[n]$  when  $x[n] = 2e^{j\pi/4} e^{j(\pi/3)n}$

One Step - evaluate  $H(e^{j\hat{\omega}})$  at  $\hat{\omega} = \pi/3$

$$H(e^{j\hat{\omega}}) = (2 + 2 \cos \hat{\omega}) e^{-j\hat{\omega}}$$

$$H(e^{j\hat{\omega}}) = 3e^{-j\pi/3} \quad @ \hat{\omega} = \pi/3$$

$$y[n] = (3e^{-j\pi/3}) \times 2e^{j\pi/4} e^{j(\pi/3)n} = 6e^{-j\pi/12} e^{j(\pi/3)n}$$


10/6/2003

© 2003, JH McClellan & RW Schaefer

15

## EXAMPLE: COSINE INPUT

Find  $y[n]$  when  $H(e^{j\hat{\omega}})$  is known  
and  $x[n] = 2 \cos(\frac{\pi}{3}n + \frac{\pi}{4})$

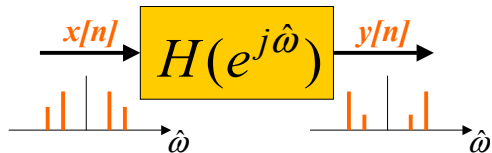

$$H(e^{j\hat{\omega}}) = (2 + 2 \cos \hat{\omega}) e^{-j\hat{\omega}}$$

10/6/2003

© 2003, JH McClellan & RW Schaefer

16

## EX: COSINE INPUT (ans-1)

Find  $y[n]$  when  $x[n] = 2 \cos(\frac{\pi}{3}n + \frac{\pi}{4})$

$$2 \cos(\frac{\pi}{3}n + \frac{\pi}{4}) = e^{j(\pi n/3 + \pi/4)} + e^{-j(\pi n/3 + \pi/4)}$$

$$\Rightarrow x[n] = x_1[n] + x_2[n]$$

$$y_1[n] = H(e^{j\pi/3}) e^{j(\pi n/3 + \pi/4)}$$

$$y_2[n] = H(e^{-j\pi/3}) e^{-j(\pi n/3 + \pi/4)}$$

$$\Rightarrow y[n] = y_1[n] + y_2[n]$$

10/6/2003

17

## EX: COSINE INPUT (ans-2)

Find  $y[n]$  when  $x[n] = 2 \cos(\frac{\pi}{3}n + \frac{\pi}{4})$

$$H(e^{j\hat{\omega}}) = (2 + 2 \cos \hat{\omega})e^{-j\hat{\omega}}$$

$$y_1[n] = H(e^{j\pi/3})e^{j(\pi n/3 + \pi/4)} = 3e^{-j(\pi/3)}e^{j(\pi n/3 + \pi/4)}$$

$$y_2[n] = H(e^{-j\pi/3})e^{-j(\pi n/3 + \pi/4)} = 3e^{j(\pi/3)}e^{-j(\pi n/3 + \pi/4)}$$

$$y[n] = 3e^{j(\pi n/3 - \pi/12)} + 3e^{-j(\pi n/3 - \pi/12)}$$

$$\Rightarrow y[n] = 6 \cos(\frac{\pi}{3}n - \frac{\pi}{12})$$

18

## SINUSOID thru FIR

- IF  $H^*(e^{j\hat{\omega}}) = H(e^{-j\hat{\omega}})$
- Multiply the Magnitudes
- Add the Phases

$$x[n] = A \cos(\hat{\omega}_1 n + \phi)$$


$$\Rightarrow y[n] = A |H(e^{j\hat{\omega}_1})| \cos(\hat{\omega}_1 n + \phi + \angle H(e^{j\hat{\omega}_1}))$$

10/6/2003


© 2003, JH McClellan & RW Schaffer

19

## LTI Demo with Sinusoids

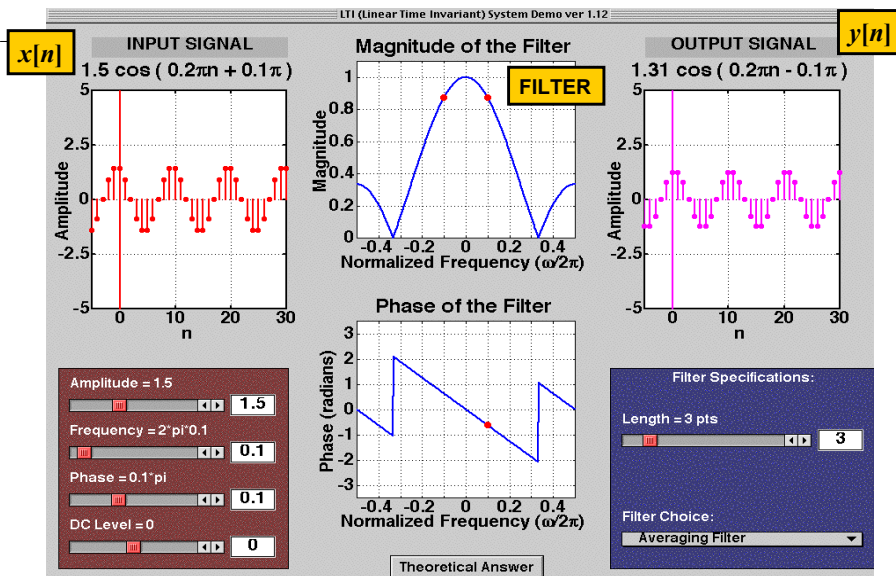

## DIGITAL "FILTERING"

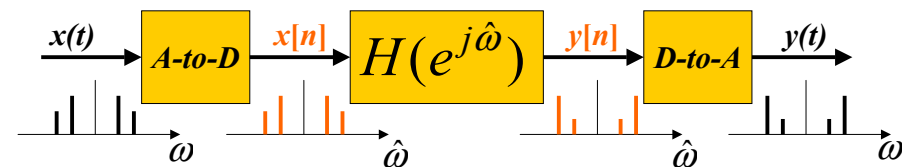


- $\omega$  SPECTRUM of  $x(t)$  (SUM of SINUSOIDS)
- $\hat{\omega}$  SPECTRUM of  $x[n]$ 
  - Is ALIASING a PROBLEM ?
- SPECTRUM  $y[n]$  (FIR Gain or Nulls)
- $\omega$  Then, OUTPUT  $y(t)$  = SUM of SINUSOIDS

10/6/2003

© 2003, JH McClellan & RW Schaffer

21

# FREQUENCY SCALING

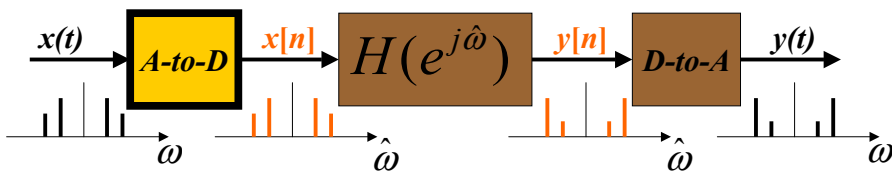


- TIME SAMPLING:
  - IF **NO** ALIASING:
  - FREQUENCY SCALING

$$t = nT_s$$

$$\hat{\omega} = \omega T_s = \frac{\omega}{f_s}$$

# 11-pt AVERAGER Example

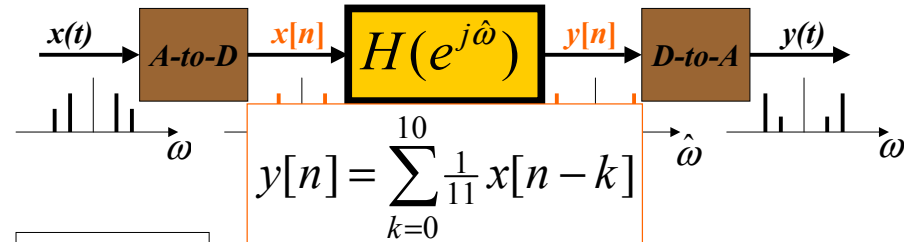


250 Hz

25 Hz

$$H(e^{j\hat{\omega}}) = \frac{\sin(\frac{11}{2} \hat{\omega})}{11 \sin(\frac{1}{2} \hat{\omega})} e^{-j5\hat{\omega}} \quad ?$$

$$x(t) = \cos(2\pi(25)t) + \cos(2\pi(250)t - \frac{1}{2}\pi)$$

# D-A FREQUENCY SCALING

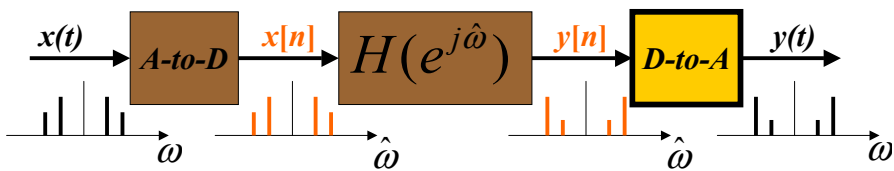


- TIME SAMPLING:

$$t = nT_s \Rightarrow n \leftarrow t f_s$$

- RECONSTRUCT up to  $0.5f_s$ 
  - FREQUENCY SCALING

$$\omega = \hat{\omega} f_s$$

# TRACK the FREQUENCIES

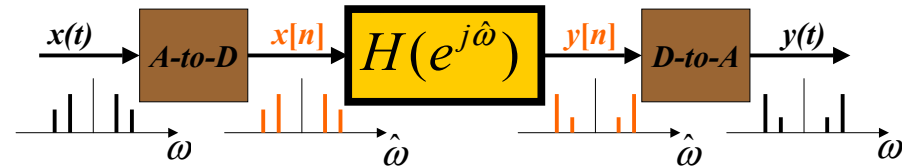

250 Hz

25 Hz

$$0.5\pi \quad H(e^{j0.5\pi})$$

$$.05\pi \quad H(e^{j0.05\pi})$$

$0.5\pi$

$.05\pi$


250 Hz

25 Hz

$F_s = 1000 \text{ Hz}$

**NO new freqs**

# 11-pt AVERAGER

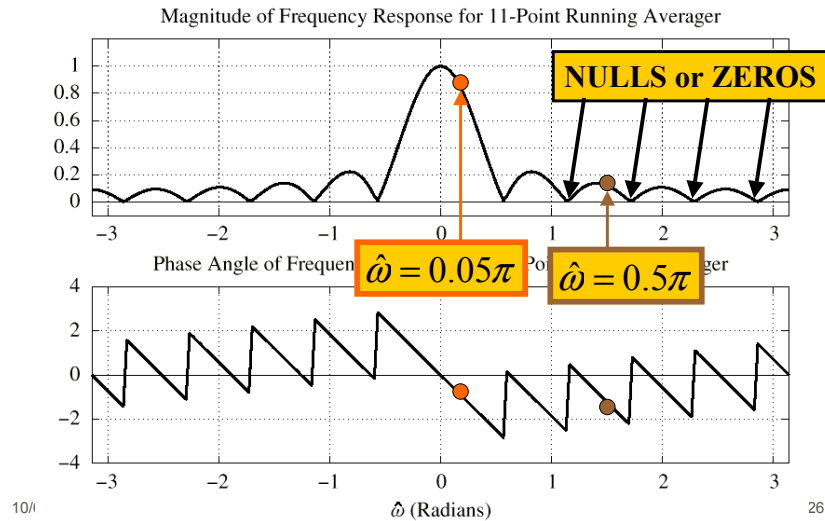

# EVALUATE Freq. Response

$$H(e^{j\hat{\omega}}) = \frac{\sin(\frac{11}{2} \hat{\omega})}{11 \sin(\frac{1}{2} \hat{\omega})} e^{-j5\hat{\omega}}$$

At  $\hat{\omega} = 0.5\pi$

$$H(e^{j\hat{\omega}}) = \frac{\sin(\frac{11}{2} (0.5\pi))}{11 \sin(\frac{1}{2} (0.5\pi))} e^{-j5(0.5\pi)}$$

$$= \frac{\sin(2.75\pi)}{11 \sin(0.25\pi)} e^{-j2.5\pi}$$

$$= 0.0909 e^{-j0.5\pi}$$

# EVALUATE Freq. Response

$$x(t) = \cos(2\pi(25)t) + \sin(2\pi(250)t)$$

evaluating at 25 and 250 Hz.

$$H(e^{j2\pi(25)/1000}) = \frac{\sin(\pi(25)(11)/1000)}{11 \sin(\pi(25)/1000)} e^{-j2\pi(25)(5)/1000}$$

MAG SCALE

$$= 0.8811 e^{-j\pi/4}$$


PHASE CHANGE

$$H(e^{j2\pi(250)/1000}) = \frac{\sin(\pi(250)(11)/1000)}{11 \sin(\pi(250)/1000)} e^{-j2\pi(250)(5)/1000}$$


$$= 0.0909 e^{-j\pi/2}$$

$$y(t) = 0.8811 \cos(2\pi(25)t - \pi/4) + 0.0909 \sin(2\pi(250)t - \pi/2)$$

Magnitude of Frequency Response for 11-Point Running Averager

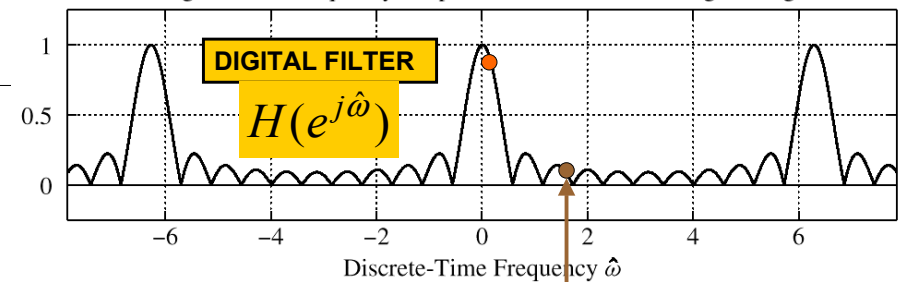


Equivalent Continuous-Time Frequency Response for  $f_s = 1000$

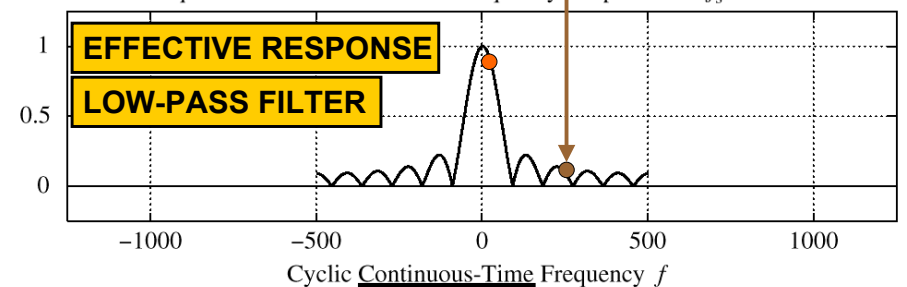

# FILTER TYPES

- LOW-PASS FILTER (**LPF**)
  - BLURRING
  - ATTENUATES HIGH FREQUENCIES
- HIGH-PASS FILTER (**HPF**)
  - SHARPENING for IMAGES
  - BOOSTS THE HIGHS
  - REMOVES DC
- BAND-PASS FILTER (**BPF**)

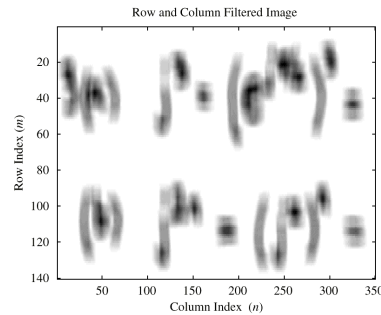


10/6/2003

© 2003, JH McClellan & RW Schaffer

30

# B & W IMAGE

Original Black and White Image

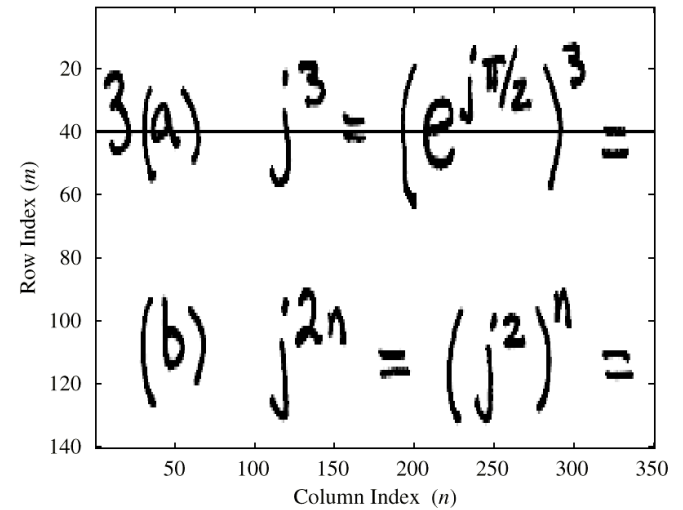

10/6/2003



31

# B&W IMAGE with COSINE

**FILTERED: 11-pt AVG**

Homework plus Cosine

Remove Cosine Stripe with Averaging Fi

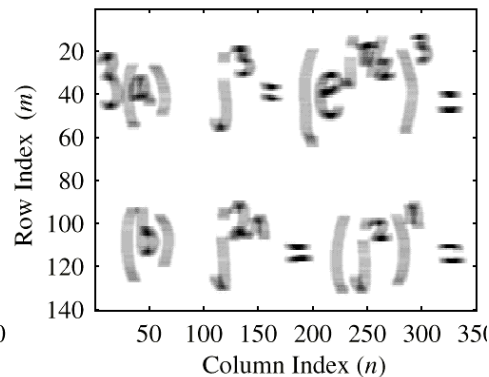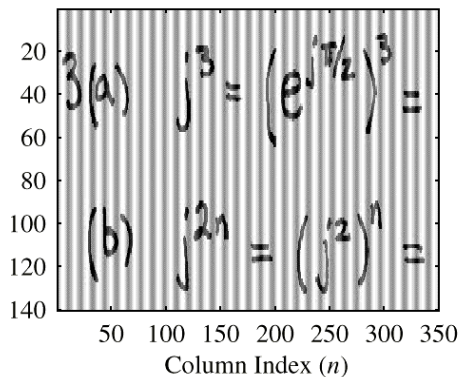


10/6/2003

© 2003, JH McClellan & RW Schaffer

32

# FILTERED B&W IMAGE

Row and Column Filtered Image

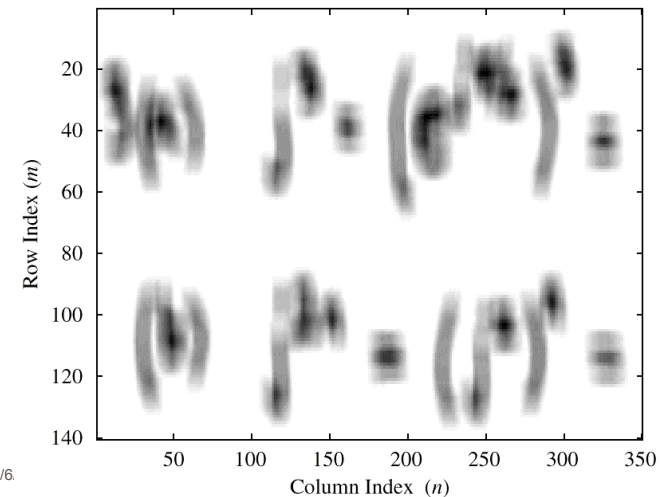


**LPF:  
BLUR**

10/6

33



# ROW of B&W IMAGE

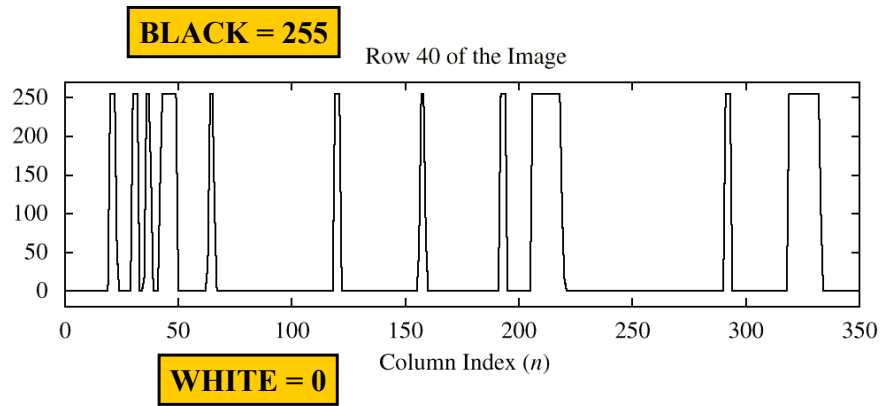


10/6/2003

© 2003, JH McClellan & RW Schafer

34

# FILTERED ROW of IMAGE

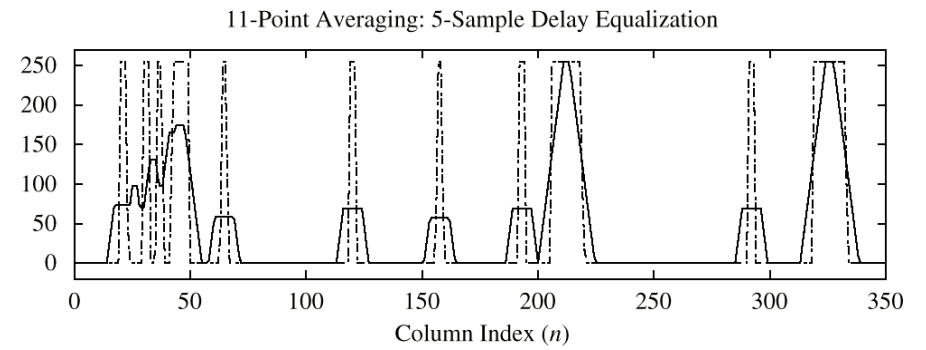

**ADJUSTED DELAY by 5 samples**

10/6/2003

© 2003, JH McClellan & RW Schafer

35