

EE-2025

Fall-2000

Lecture 13

Z Transforms: Introduction

9-Oct-00

Info: Web-CT, Lab, HW

- Quiz #2 on 20-Oct (Friday)
 - Coverage: HW #3 — HW #7
 - Review Session: planned for Thursday
- Prob Set #6 due **THIS WEEK**
 - Solutions will be posted Thursday @ 6pm
- Lab #7 on Nulling Filters
 - Frequency Response

10/6/00

EE-2025 Fall-00 mhh/jMc

2

All 2025 students invited

- CEO of Texas Instruments to give talk on Thursday in ECE Auditorium
 - 3:30 pm, 12-Oct-2000
 - Tom Engibous
- Remarks about the future for DSP, as well as Analog Systems

Superficial Knowledge

- It depends how carefully you think about it. If you don't think very carefully it's obvious; but if you think about it in depth, you'll get confused and it won't be obvious.

LECTURE

10/6/00

EE-2025 Fall-00 mhh/jMc

3

10/6/00

EE-2025 Fall-00 mhh/jMc

4

Lecture 13

Z Transforms: Introduction

READING ASSIGNMENTS


- This Lecture:
 - Chapter 7, pp. 202-216
- Other Reading:
 - Recitation: Ch. 7, pp. 217-220
 - CASCADING SYSTEMS
 - Next Lecture: Chapter 7, more

LECTURE OBJECTIVES

- INTRODUCE the Z-TRANSFORM
 - Give Mathematical Definition
 - Show how the $H(z)$ POLYNOMIAL simplifies analysis
 - CONVOLUTION EXAMPLE
- Z-Transform can be applied to
 - FIR Filter: $h[n] \rightarrow H(z)$
 - Signals: $x[n] \rightarrow X(z)$

$$H(z) = \sum_n h[n]z^{-n}$$

TWO (no, THREE) DOMAINS

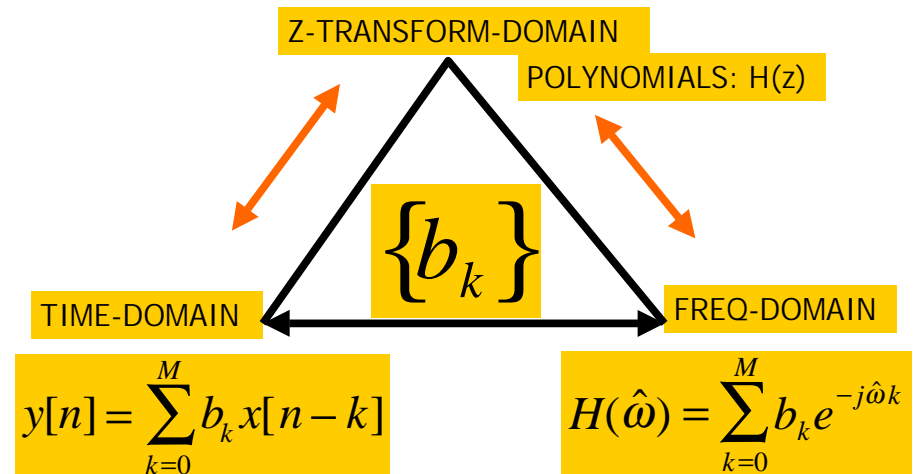

TRANSFORM CONCEPT

- Move to a new domain where
 - OPERATIONS are EASIER/FAMILIAR
 - Use **POLYNOMIALS**
- TRANSFORM both ways
 - $x[n] \rightarrow X(z)$ (into the z domain)
 - $X(z) \rightarrow x[n]$ (back to the time domain)


10/6/00

EE-2025 2000 rws/jMc

5

"TRANSFORM" EXAMPLE

- Equivalent Representations

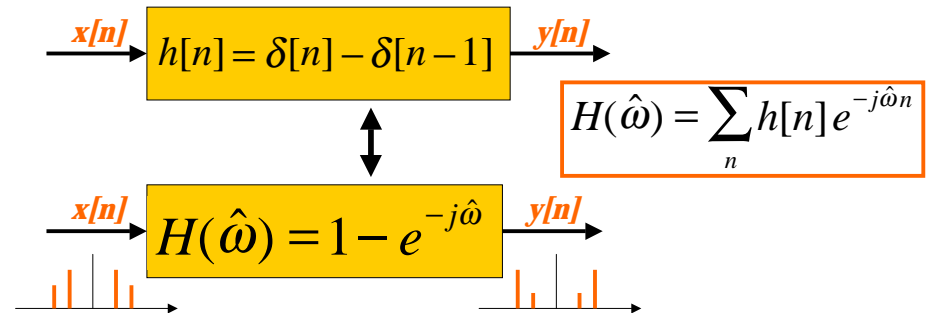


10/6/00

EE-2025 2000 rws/jMc

6

Z-TRANSFORM IDEA

- POLYNOMIAL REPRESENTATION

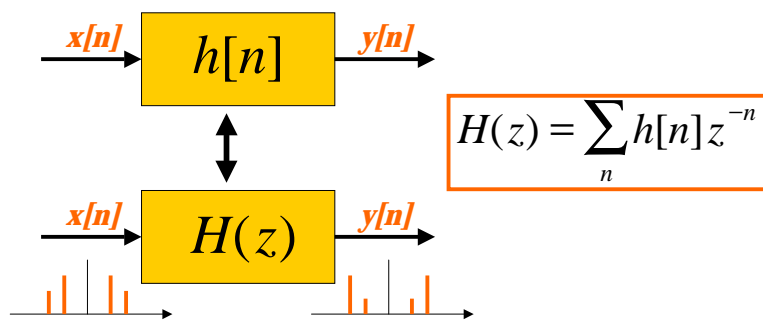

10/6/00

EE-2025 2000 rws/jMc

7

Z-Transform DEFINITION

- POLYNOMIAL Representation of LTI SYSTEM:

$$H(z) = \sum_n h[n] z^{-n}$$

- EXAMPLE:

$$\{h[n]\} = \{2, 0, -3, 0, 2\}$$

$$H(z) = 2z^{-0} + 0z^{-1} - 3z^{-2} + 0z^{-3} + 2z^{-4}$$

$$= 2 - 3z^{-2} + 2z^{-4}$$

$$= 2 - 3(z^{-1})^2 + 2(z^{-1})^4$$

APPLIES to Any SIGNAL

POLYNOMIAL in z^{-1}

10/6/00

EE-2025 2000 rws/jMc

8

Z-Transform EXAMPLE

ANY SIGNAL has a z-Transform:

$$X(z) = \sum_n x[n]z^{-n}$$

Example 7.1

n	$n < -1$	-1	0	1	2	3	4	5	$n > 5$
$x[n]$	0	0	2	4	6	4	2	0	0

$$X(z) = ? \quad X(z) = 2 + 4z^{-1} + 6z^{-2} + 4z^{-3} + 2z^{-4}$$

Example 7.2

$$X(z) = 1 - 2z^{-1} + 3z^{-3} - z^{-5}$$

EXPONENT GIVES TIME LOCATION

$$x[n] = \begin{cases} 0 & n < 0 \\ 1 & n = 0 \\ -2 & n = 1 \\ 0 & n = 2 \\ 3 & n = 3 \\ 0 & n = 4 \\ -1 & n = 5 \\ 0 & n > 5 \end{cases}$$

$$x[n] = ?$$

$$x[n] = \delta[n] - 2\delta[n-1] + 3\delta[n-3] - \delta[n-5]$$

Z-Transform of FIR Filter

CALLED the **SYSTEM FUNCTION**

$h[n]$ is same as $\{b_k\}$

SYSTEM FUNCTION

$$H(z) = \sum_{k=0}^M b_k z^{-k} = \sum_{k=0}^M h[k] z^{-k}$$

$$y[n] = \sum_{k=0}^M b_k x[n-k] = \sum_{k=0}^M h[k] x[n-k]$$

FIR DIFFERENCE EQUATION

CONVOLUTION

Z-Transform of FIR Filter

Get $H(z)$ DIRECTLY from the $\{b_k\}$

Example 7.3 in the book:


$$y[n] = 6x[n] - 5x[n-1] + x[n-2]$$

$$\{b_k\} = \{6, -5, 1\}$$


$$H(z) = \sum b_k z^{-k} = 6 - 5z^{-1} + z^{-2}$$

EX. DELAY SYSTEM

- UNIT DELAY: find $h[n]$ and $H(z)$



$$H(z) = \sum \delta[n-1]z^{-n} = z^{-1}$$



DELAY EXAMPLE

- UNIT DELAY: find $y[n]$ via polynomials

- $x[n] = \{3, 1, 4, 1, 5, 9, 0, 0, \dots\}$

$$Y(z) = z^{-1}X(z)$$

$$Y(z) = z^{-1}(3 + z^{-1} + 4z^{-2} + z^{-3} + 5z^{-4} + 9z^{-5})$$

$$Y(z) = 0z^0 + 3z^{-1} + z^{-2} + 4z^{-3} + z^{-4} + 5z^{-5} + 9z^{-6}$$

n	$n < 0$	0	1	2	3	4	5	6	$n > 6$
$y[n]$	0	0	3	1	4	1	5	9	0

DELAY PROPERTY

A delay of one sample multiplies the z -transform by z^{-1} .

$$x[n-1] \iff z^{-1}X(z)$$

Time delay of n_0 samples multiplies the z -transform by z^{-n_0}

$$x[n-n_0] \iff z^{-n_0}X(z)$$

GENERAL I/O PROBLEM

- Input is $x[n]$, find $y[n]$ (for FIR, $h[n]$)
- How to combine $X(z)$ and $H(z)$?

Example 7.5

$$x[n] = \delta[n-1] - \delta[n-2] + \delta[n-3] - \delta[n-4]$$

$$\text{and } h[n] = \delta[n] + 2\delta[n-1] + 3\delta[n-2] + 4\delta[n-3]$$

$$X(z) = 0 + 1z^{-1} - 1z^{-2} + 1z^{-3} - 1z^{-4}$$

$$\text{and } H(z) = 1 + 2z^{-1} + 3z^{-2} + 4z^{-3}$$

FIR Filter = CONVOLUTION

$x[n], X(z)$	0	+1	-1	+1	-1				
$h[n], H(z)$	1	2	3	4					

	0	+1	-1	+1	-1				
		0	+2	-2	+2	-2			
			0	+3	-3	+3	-3		
				0	+4	-4	+4	-4	

$y[n], Y(z)$	0	+1	+1	+2	+2	-3	+1	-4	

$$y[n] = \sum_{k=0}^M b_k x[n-k] = \sum_{k=0}^M h[k] x[n-k]$$

CONVOLUTION PROPERTY

PROOF:

$$y[n] = x[n] * h[n] = \sum_{k=0}^M h[k] x[n-k]$$

$$Y(z) = \sum_{k=0}^M h[k] (z^{-k} X(z))$$

MULTIPLY Z-TRANSFORMS

$$= \left(\sum_{k=0}^M h[k] z^{-k} \right) X(z) = H(z) X(z).$$

10/6/00

EE-2020 2000 rws/jMc

18

CONVOLUTION EXAMPLE

MULTIPLY the z-TRANSFORMS:

Example 7.5

$$x[n] = \delta[n-1] - \delta[n-2] + \delta[n-3] - \delta[n-4]$$

$$\text{and } h[n] = \delta[n] + 2\delta[n-1] + 3\delta[n-2] + 4\delta[n-3]$$

$$X(z) = 0 + 1z^{-1} - 1z^{-2} + 1z^{-3} - 1z^{-4}$$

$$\text{and } H(z) = 1 + 2z^{-1} + 3z^{-2} + 4z^{-3}$$

MULTIPLY $H(z)X(z)$

10/6/00

EE-2025 2000 rws/jMc

19

CONVOLUTION EXAMPLE

Finite-Length input $x[n]$

FIR Filter ($L=4$)

MULTIPLY Z-TRANSFORMS

$$Y(z) = H(z)X(z)$$

$$= (1 + 2z^{-1} + 3z^{-2} + 4z^{-3})(z^{-1} - z^{-2} + z^{-3} - z^{-4})$$

$$= z^{-1} + (-1 + 2)z^{-2} + (1 - 2 + 3)z^{-3} + (-1 + 2 - 3 + 4)z^{-4}$$

$$+ (-2 + 3 - 4)z^{-5} + (-3 + 4)z^{-6} + (-4)z^{-7}$$

$$= z^{-1} + z^{-2} + 2z^{-3} + 2z^{-4} - 3z^{-5} + z^{-6} - 4z^{-7}$$

y[n] = ?

10/6/00

EE-2025 2000 rws/jMc

20

CASCADE SYSTEMS

- Does the order of S_1 & S_2 matter?
 - NO, LTI SYSTEMS can be rearranged !!!
 - Remember: $h_1[n] * h_2[n]$
 - How to combine $H_1(z)$ and $H_2(z)$?

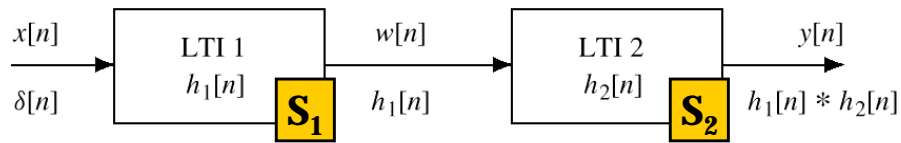


Figure 5.19 A Cascade of Two LTI Systems.

CASCADE EQUIVALENT

- Multiply the System Functions

