

EE-2025

Spring-2003

**Lecture 4
Spectrum Representation
17-Jan-03**

Web-CT Info

- ◆ Bulletin Board has all **OFFICIAL** msgs
- ◆ Lectures are being posted
 - ◆ PDF format (4 per page)
- ◆ **SP-1st** Chap 3 different from DSP-First
 - ◆ Fourier Series material has been changed
- ◆ Upcoming Events:
 - ◆ Quiz #1 on 31-Jan (Friday)

1/21/2003

ECE-2025 Spr-2003 jMc

2

James THURBER

- ◆ It is better to know some of the questions than all of the answers

Lab Info

- ◆ Lab #1 Report
 - ◆ Turn in at beginning of your lab time
 - ◆ **Ask your grading TA about format**
- ◆ Lab #2 will be posted later today
 - ◆ For 21-Jan thru 27-Jan
- ◆ Pre-Lab Questions will get harder !!!
- ◆ Finish Instructor Verification in Lab
- ◆ Computer Problems?
help@ece.gatech.edu

1/21/2003

ECE-2025 Spr-2003 jMc

3

1/21/2003

ECE-2025 Spr-2003 jMc

4

Homework Info

- ◆ Written HW #2 due NEXT WEEK
 - ◆ In Recitation, at the beginning
 - ◆ Monday Rec?...turn in HW at Lab on Wed.
- ◆ HW #1 Solutions have been posted
- ◆ Format your HW (see guidelines)
- ◆ HW and MATLAB Help:
 - ◆ VanLeer 261 Mon 1 PM
 - ◆ VanLeer 261 Mon 6 PM
 - ◆ VanLeer 261 Tues 6 PM
 - ◆ VanLeer 261 Wed 4:30 PM

1/21/2003

ECE-2025 Spr-2003 jMc

5

PRINTING QUOTA

- ◆ ECE Labs have printers, but...
- ◆ Limit your printing to essentials
 - ◆ Your account has a quota
- ◆ 10 pages/week
 - ◆ 2000 students
 - ◆ 3 courses/student
 - ◆ 15 weeks/semester
 - ◆ 900,000 pages !

1/21/2003

ECE-2025 Spr-2003 jMc

6

HISTORY

- ◆ Which company's first successful product was a sine-wave generator?
 - ◆ Variable frequency
 - ◆ Lab Instrument



Lecture

1/21/2003

ECE-2025 Spr-2003 jMc

7

LECTURE OBJECTIVES

- ◆ Sinusoids with **DIFFERENT** Frequencies
 - ◆ SYNTHESIZE by Adding Sinusoids

$$x(t) = \sum_{k=1}^N A_k \cos(2\pi f_k t + \varphi_k)$$

- ◆ **SPECTRUM** Representation
 - ◆ Graphical Form shows **DIFFERENT** Freqs


1/21/2003

ECE-2025 Spr-2003 jMc

8

FREQUENCY DIAGRAM

◆ Plot Complex Amplitude vs. Freq

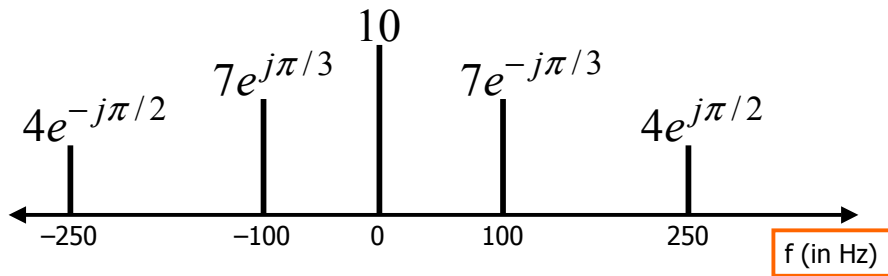

Another FREQ. Diagram

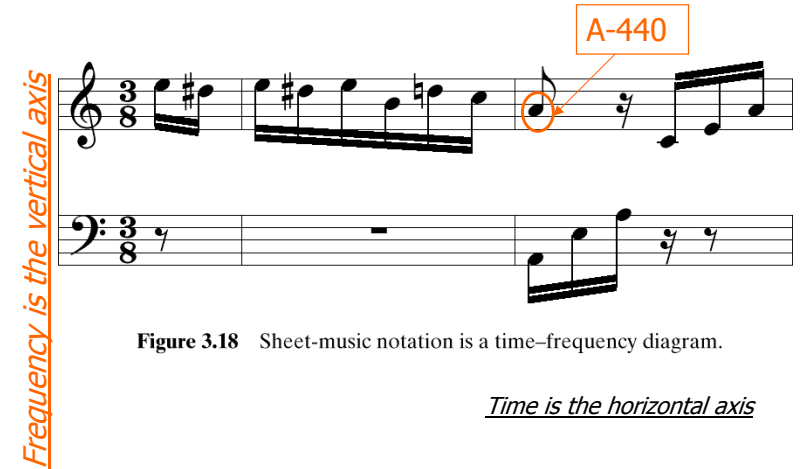


Figure 3.18 Sheet-music notation is a time–frequency diagram.


MOTIVATION

◆ Synthesize **Complicated** Signals

◆ Musical Notes 

- ◆ Piano uses 3 strings for many notes
- ◆ Chords: play several notes simultaneously


◆ Human Speech

- ◆ Vowels have dominant frequencies
- ◆ Application: computer generated speech 

◆ Can **all** signals be generated this way?

- ◆ Sum of sinusoids?

Fur Elise WAVEFORM

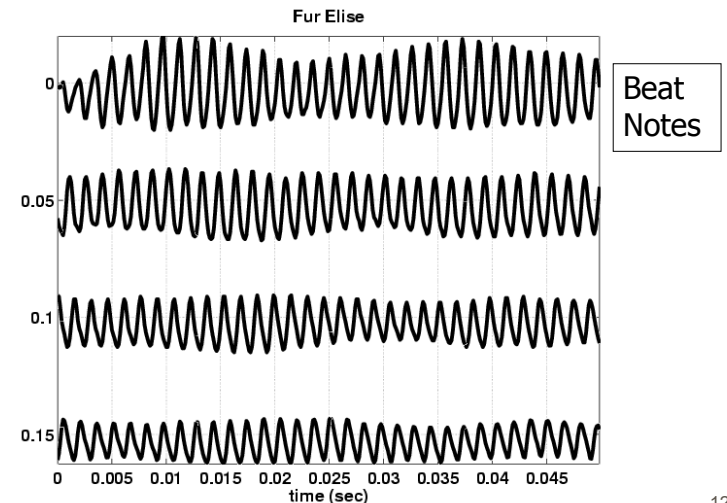


Speech Signal: BAT



- ◆ Nearly **Periodic** in Vowel Region

- ◆ Period is (Approximately) $T = 0.0065$ sec

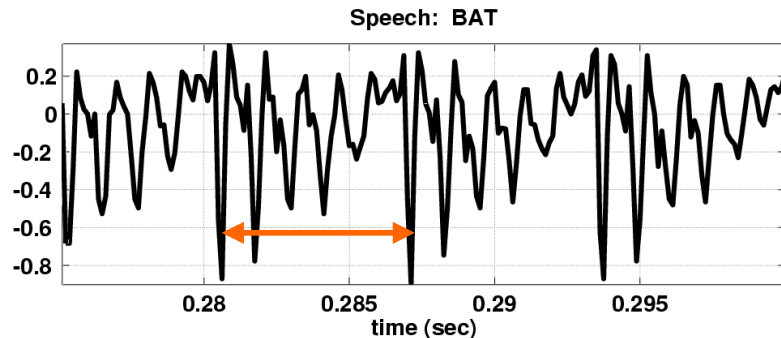

1/21/2003

ECE-2025 Spr-2003 jMc

13

Euler's Formula Reversed

- ◆ Solve for **cosine** (or sine)

$$e^{j\omega t} = \cos(\omega t) + j \sin(\omega t)$$

$$e^{-j\omega t} = \cos(-\omega t) + j \sin(-\omega t)$$

$$e^{-j\omega t} = \cos(\omega t) - j \sin(\omega t)$$

$$e^{j\omega t} + e^{-j\omega t} = 2 \cos(\omega t)$$

$$\cos(\omega t) = \frac{1}{2} (e^{j\omega t} + e^{-j\omega t})$$

1/21/2003

ECE-2025 Spr-2003 jMc

14

INVERSE Euler's Formula

- ◆ Solve for **cosine** (or sine)

$$\cos(\omega t) = \frac{1}{2} (e^{j\omega t} + e^{-j\omega t})$$

$$\sin(\omega t) = \frac{1}{2j} (e^{j\omega t} - e^{-j\omega t})$$

1/21/2003

ECE-2025 Spr-2003 jMc

15

SPECTRUM Interpretation

- ◆ Cosine = sum of 2 complex exponentials:

$$A \cos(7t) = \frac{A}{2} e^{j7t} + \frac{A}{2} e^{-j7t}$$

- ◆ One has a positive frequency
- ◆ The other has **negative** freq.
- ◆ Amplitude of each is half as big

1/21/2003

ECE-2025 Spr-2003 jMc

16

NEGATIVE FREQUENCY

- ◆ Is negative frequency real?
- ◆ Doppler Radar provides an example
 - ◆ Police radar measures speed by using the Doppler shift principle
 - ◆ Let's assume 400Hz <---> 60 mph
 - ◆ +400Hz means towards the radar
 - ◆ -400Hz means away (opposite direction)
 - ◆ Think of a train whistle

1/21/2003

ECE-2025 Spr-2003 jMc

17

SPECTRUM of SINE

- ◆ Sine = sum of 2 complex exponentials:

$$A \sin(7t) = \frac{A}{2j} e^{j7t} - \frac{A}{2j} e^{-j7t}$$

$$= \frac{1}{2} A e^{-j0.5\pi} e^{j7t} + \frac{1}{2} A e^{j0.5\pi} e^{-j7t}$$

$\frac{-1}{j} = j = e^{j0.5\pi}$

- ◆ Positive freq. has phase = -0.5π
- ◆ Negative freq. has phase = +0.5π

1/21/2003


ECE-2025 Spr-2003 jMc

18

GRAPHICAL SPECTRUM

EXAMPLE of SINE

$$A \sin(7t) = \frac{1}{2} A e^{-j0.5\pi} e^{j7t} + \frac{1}{2} A e^{j0.5\pi} e^{-j7t}$$

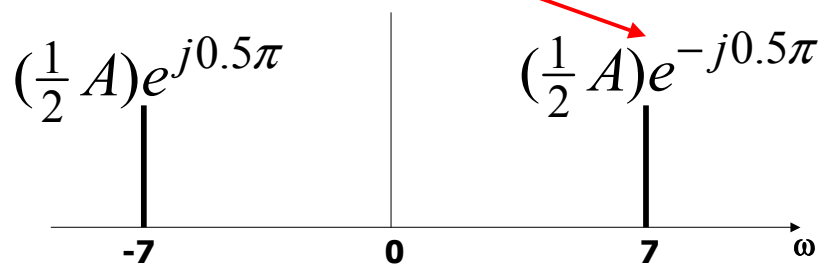

AMPLITUDE, PHASE & FREQUENCY are shown


1/21/2003

ECE-2025 Spr-2003 jMc

19

SPECTRUM ---> SINUSOID

- ◆ Add the spectrum components:

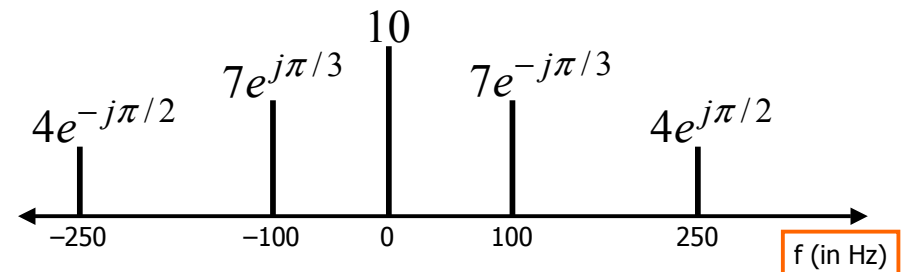

What is the formula for the signal x(t)?

1/21/2003

ECE-2025 Spr-2003 jMc

20

Gather (A, ω, ϕ) information

◆ Frequencies:

- ◆ -250 Hz
- ◆ -100 Hz
- ◆ **0** Hz
- ◆ 100 Hz
- ◆ 250 Hz

◆ Amplitude & Phase

- ◆ 4 $-\pi/2$
- ◆ 7 $+\pi/3$
- ◆ 10 **0**
- ◆ 7 $-\pi/3$
- ◆ 4 $+\pi/2$

Note the **conjugate phase**

DC is another name for zero-freq component

DC component always has $\phi=0$ or π (for real $x(t)$)

Add Spectrum Components-1

◆ Frequencies:

- ◆ -250 Hz
- ◆ -100 Hz
- ◆ 0 Hz
- ◆ 100 Hz
- ◆ 250 Hz

◆ Amplitude & Phase


- ◆ 4 $-\pi/2$
- ◆ 7 $+\pi/3$
- ◆ 10 **0**
- ◆ 7 $-\pi/3$
- ◆ 4 $+\pi/2$

$$x(t) = 10 +$$

$$7e^{-j\pi/3}e^{j2\pi(100)t} + 7e^{j\pi/3}e^{-j2\pi(100)t}$$

$$4e^{j\pi/2}e^{j2\pi(250)t} + 4e^{-j\pi/2}e^{-j2\pi(250)t}$$

Add Spectrum Components-2

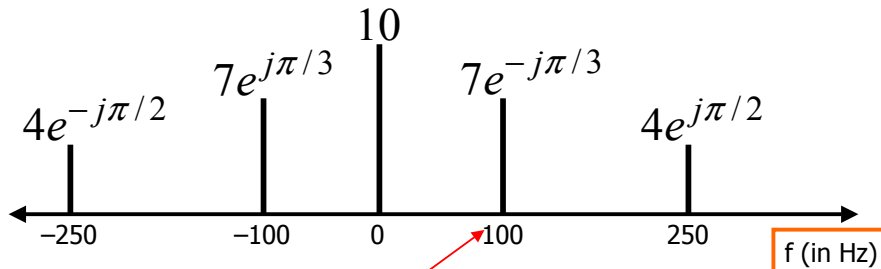

$$x(t) = 10 +$$

$$7e^{-j\pi/3}e^{j2\pi(100)t} + 7e^{j\pi/3}e^{-j2\pi(100)t}$$

$$4e^{j\pi/2}e^{j2\pi(250)t} + 4e^{-j\pi/2}e^{-j2\pi(250)t}$$

Simplify Components

$$x(t) = 10 +$$

$$7e^{-j\pi/3}e^{j2\pi(100)t} + 7e^{j\pi/3}e^{-j2\pi(100)t}$$

$$4e^{j\pi/2}e^{j2\pi(250)t} + 4e^{-j\pi/2}e^{-j2\pi(250)t}$$

Use Euler's Formula to get **REAL** sinusoids:

$$A \cos(\omega t + \phi) = \frac{1}{2} A e^{-j\phi} e^{j\omega t} + \frac{1}{2} A e^{-j\phi} e^{-j\omega t}$$

FINAL ANSWER

$$x(t) = 10 + 14 \cos(2\pi(100)t - \pi/3) + 8 \cos(2\pi(250)t + \pi/2)$$

So, we get the general form:

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi f_k t + \varphi_k)$$

1/21/2003

ECE-2025 Spr-2003 jMc

25

Summary: GENERAL FORM

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi f_k t + \varphi_k)$$

$$x(t) = X_0 + \sum_{k=1}^N \Re\{X_k e^{j2\pi f_k t}\}$$

$$X_k = A_k e^{j\varphi_k}$$

Frequency = f_k

$$\Re\{z\} = \frac{1}{2}z + \frac{1}{2}z^*$$

$$x(t) = X_0 + \sum_{k=1}^N \left\{ \frac{1}{2} X_k e^{j2\pi f_k t} + \frac{1}{2} X_k^* e^{-j2\pi f_k t} \right\}$$

1/21/2003

ECE-2025 Spr-2003 jMc

26

Example: Synthetic Vowel

◆ Sum of 5 Frequency Components

f_k (Hz)	X_k	Mag	Phase (rad)
200	$(771 + j12202)$	12,226	1.508
400	$(-8865 + j28048)$	29,416	1.876
500	$(48001 - j8995)$	48,836	-0.185
1600	$(1657 - j13520)$	13,621	-1.449
1700	$4723 + j0$	4723	0

Table 3.1: Complex amplitudes for harmonic signal that approximates the vowel sound "ah".


1/21/2003

ECE-2025 Spr-2003 jMc

27

SPECTRUM of VOWEL

- ◆ Note: Spectrum has $0.5X_k$ (except X_{DC})
- ◆ Conjugates in negative frequency

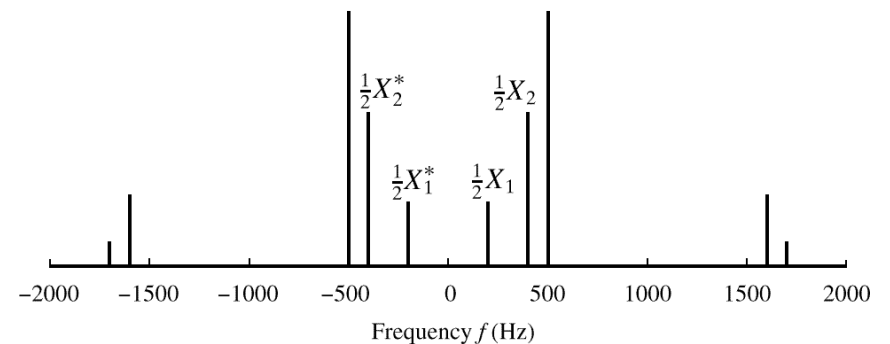


1/21/2003

ECE-2025 Spr-2003 jMc

28

SPECTRUM of VOWEL (Polar Format)

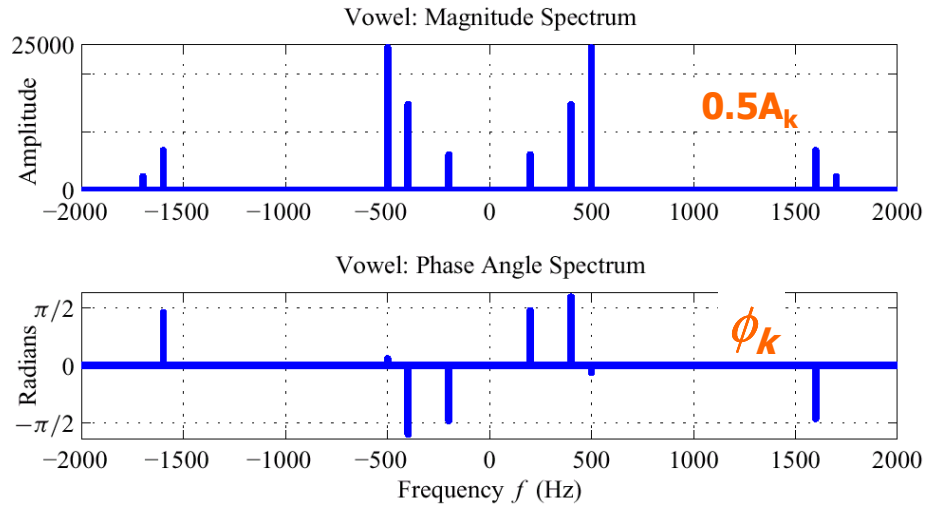

Vowel Waveform (sum of all 5 components)

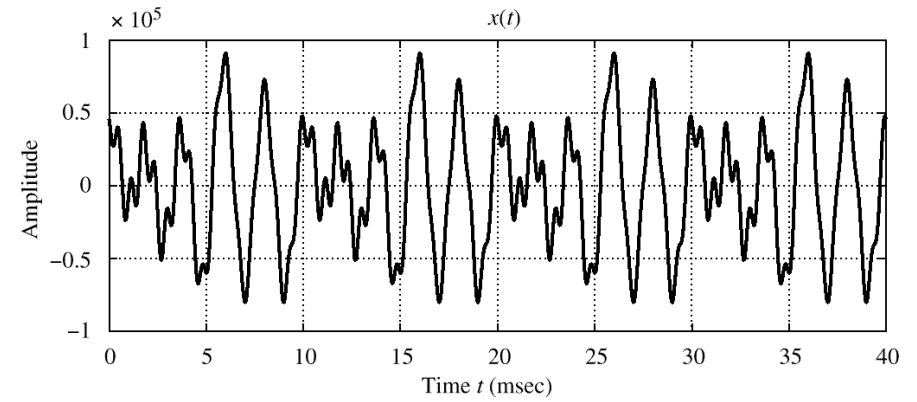


Figure 3.11 Sum of all of the terms in (3.3.4). Note that the period is 10 msec, which equals $1/f_0$.